





(ATEX, IECex, CCCex)

EXPLOSION PROOF THERMOSTATS & CONNECTION BOXES

- Thermostats without Explosion proof certification:
- Thermostats incorporated inside various boxes, housing & cabinets:
- Heat tracing connection boxes and accessories for non explosive areas
- See catalogues No. 1 See catalogue No. 2 & 3 See catalogue No. 12


Contact us

3rd Edition 11/07/2024

www.ultimheat.com

Technical catalogue



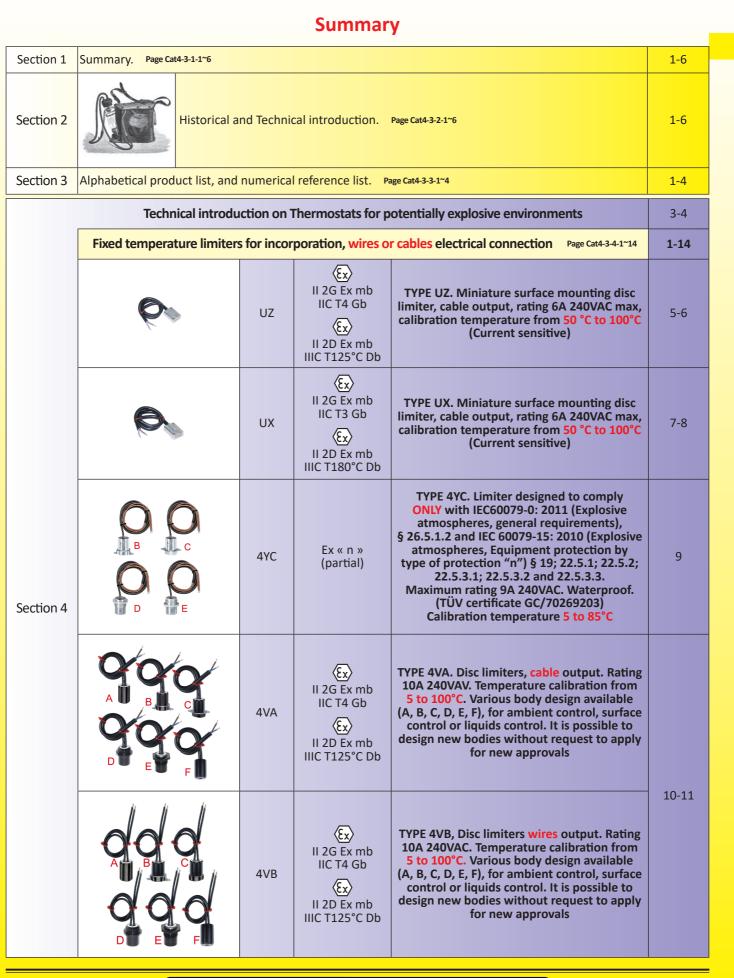

Contact us

www.ultimheat.com



×3	Thermostats a	nd con	nection bo	xes for explosive atmosphere	s .
Section 4		4XA	Ex II 2G Ex mb IIC T3 Gb Ex II 2D Ex mb IIIC T180°C Db	TYPE 4XA. Disc limiters cable output. Rating 10A 240VAC. Temperature calibration from 5 to 150°C. Various body design available (A, B, C, D, E, F), for ambient control, surface control or liquids control. It is possible to design new bodies without request to apply for new approvals	12.12
		4XB	Ex II 2G Ex mb IIC T3 Gb Ex II 2D Ex mb IIIC T180°C Db	TYPE 4XB, Disc limiters wires output. Rating 10A 240VAC. Temperature calibration from 5 to 150°C. Various body design available (A, B, C, D, E, F), for ambient control, surface control or liquids control. It is possible to design new bodies without request to apply for new approvals	12-13
Thermostats and limiters with bulb and capillary sensing element, wires or cable electrical connection Page Cat4-3-5-1~18					1-16

	1				
Section 5		КАВ-К	Ex II 2G Ex db IIC T5/T6 Gb Ex II 2D Ex tb IIIC T95°C/ T80°C Db	Temperature control, front or rear mounting, wires connection. Multiples temperature ranges from -50°C to +500°C. NC:16(4)A NO:10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +50°C (T6/T80°C) NC:16(4)A NO:10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +80°C (T5/T95°C) NC:25(4)A NO:15(2)A, 125/250 VAC; 50/60 Hz; -60°C to +50°C (T5/T95°C)	3-6
		KAB-L	Ex II 2G Ex db IIC T5/T6 Gb Ex II 2D Ex tb IIIC T95°C/ T80°C Db	Temperature control, Din Rail mounting, wires connection. Multiples temperature ranges from -50°C to +500°C. NC:16(4)A NO:10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +50°C (T6/T80°C) NC:16(4)A NO:10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +80°C (T5/T95°C) NC:25(4)A NO:15(2)A, 125/250 VAC; 50/60 Hz; -60°C to +50°C (T5/T95°C)	7-10
		KAB-3	II 2G Ex db IIC T5/T6 Gb Ex II 2D Ex tb IIIC T95°C/ T80°C Db	Temperature control, front or rear mounting, cable connection. Multiples temperature ranges from -50°C to +500°C. NC:16(4)A NO:10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +50°C (T6/T80°C) NC:16(4)A NO:10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +80°C (T5/T95°C) NC:25(4)A NO:15(2)A, 125/250 VAC; 50/60 Hz; -60°C to +50°C (T5/T95°C)	11-13
		KAB-4	Ex II 2G Ex db IIC T5/T6 Gb Ex II 2D Ex tb IIIC T95°C/ T80°C Db	Temperature control, Din Rail mounting, cable connection. Multiples temperature ranges from -50°C to +500°C. NC:16(4)A NO:10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +50°C (T6/T80°C) NC:16(4)A NO:10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +80°C (T5/T95°C) NC:25(4)A NO:15(2)A, 125/250 VAC; 50/60 Hz; -60°C to +50°C (T5/T95°C)	14-16



Contact us

www.ultimheat.com





0

Section 7	Y9B6 Y9E6	Ex II 2G Ex eb db IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	Connection boxes with two M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, temperature sensing by backside rod with fins	12-13
	Y9F0	Ex II 2G Ex eb IIC T4/T5 Gb Ex II 2D Ex tb IIIC T125°C/ T95°C Db	Large connection boxes with M20 and M25 cable glands and 35mm DIN Rail	14
	Ү9G2 Ү9Н2 Ү9Ј2	€x II 2G Ex eb db IIC T5 Gb €x II 2D Ex tb IIIC T95°C Db	Large connection boxes with four M20 and one M25 cable glands and two bulb and capillary thermostats with internal or external adjustment.	15-16
	Y9G4 Y9H4 Y9J4	Ex II 2G Ex eb db IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	Large connection boxes with four M20 and one M25 cable glands and two coiled bulb room thermostats with internal or external adjustment.	17-18
	Ү9К5 Ү9L5 Ү9М5	Ex II 2G Ex eb db IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	Connection boxes with two M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, temperature sensing by backside rod without fins	19-20
	Y9P6 Y9Q6 Y9R6	Ex II 2G Ex eb db IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	Connection boxes with two M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, temperature sensing by backside rod with fins	21-22

Cat4-3-1-4

Contact us

www.ultimheat.com



Section 7	Y92 Y93	Ex II 2G Ex eb IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	Electrical heat tracing connection boxes, for mounting on pipes, intended for the incorporation of mechanical or electronic thermostats.	23-28
	6YTEW	Ex II 2G Ex eb IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	TYPE 6YTEW. Heating cable termination. Can be used on standard heating cable or explosion proof heating cable. Maximum temperature 95°C. Seals are selected in factory based on dimensions of heating cable sample received.	29-31
	YC3	Ex II 2G Ex eb IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	TYPE YC3 Simplified 3 ways PPS box for connecting heating cables. 6mm ² screw terminals. Mechanical cable retention. Temperature -60+95°C Capacity 40A. Supplied with a set of gaskets for the main dimensions of round and flat cables	32-36
	YBO	Ex II 2G Ex eb IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	TYPE YBO. Self-stripping junction box in PPS, with 2 M25 cable glands. Can be used on standard heating cable or explosion proof heating cable. Maximum temperature 95°C. Rating 32A, 6mm ² Seals are selected in factory based on dimensions of heating cable sample received. Available with flat wall mounting bracket or with plastic or stainless-steel brackets for pipe mounting	37-42
	YB1	Ex II 2G Ex eb IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	TYPE YB1. Self-stripping junction box in PPS, with four M25 cable glands. Can be used on standard heating cable or explosion proof heating cable. Maximum temperature 95°C. Rating 32A, 6mm ² Seals are selected in factory based on dimensions of heating cable sample received. Available with flat wall mounting bracket or with plastic or stainless-steel brackets for pipe mounting	43-47
	Y40	Ex II 2G Ex eb IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	TYPE Y40. Aluminium self-stripping junction box, with 2 M25 cable glands. Can be used on standard heating cable or explosion proof heating cable. Maximum temperature 95°C. Seals are selected in factory based on dimensions of heating cable sample received. Available with flat wall mounting bracket or with plastic or stainless-steel brackets for pipe mounting.	48-53
	Y41	Ex II 2G Ex eb IIC T5 Gb Ex II 2D Ex tb IIIC T95°C Db	TYPE Y41. Aluminium self-stripping junction box, with four M25 cable glands. Can be used on standard heating cable or explosion proof heating cable. Maximum temperature 95°C. Seals are selected in factory based on dimensions of heating cable sample received. Available with flat wall mounting bracket or with plastic or stainless-steel brackets for pipe mounting.	54-58

Contact us

www.ultimheat.com

Cat4-3-1-5



Section 8

Cat4-3-1-6

Thermostats and connection boxes for explosive atmospheres



Exclusive stripping pliers for heat tracing cables with dedicated cutting blades according to all cable dimensions.	4-6
Exclusive tool for cutting the heating zone between the conductors (for flat self-regulating cables). Also allows to cut one of the two conductors and its insulation over 5mm in order to maintain safety isolation distances at the end of self- regulating heating cables (exclusive model).	7-8
Update 2	025/04/16

6YTTL04

6YTTL05

Section 2 Historical and Technical introduction to explosion proof thermostats


Contact us





Historical introduction to explosion proof thermostats



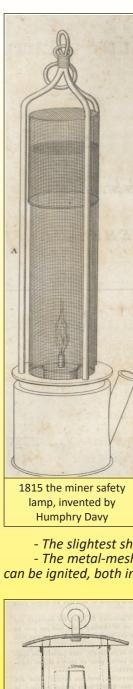

The explosion of firedamp in mines caused by the flames of oil lamps, was the cause of many accidents and caused hundreds of deaths. This explosion had a double danger: Methane gas and coal dust. When the methane exploded, the explosion was generally followed by a much more violent explosion of dust (the dust explosion) produced by inflammation of the cloud of coal dust produced by the initial explosion.

The oldest listed, but certainly not the first tragedy, was the one of the pit of the Barbeau de Wez, near Liège in Belgium, which caused 94 victims in 1514.

The first solution was to hire minors, volunteers and paid more to ignite the gas every day. Firedamp was "lit" before the miners arrival. For this purpose, a worker called penitent (because of the suit which he was clothed) or gunner, covered with wet leather or fabric clothes, face protected by a mask equipped with glass windows and carrying a lighted candle, was responsible for igniting the gassy pockets, mostly located in the upper parts of galleries.

Alphonse Meugy describes how to operate in his book, "History of the Mines in Rivede-Gier" (1848):

"Two workers called gunners used to go down to the mine a few hours before their peers, with strong canvas clothes, and covered with a kind of head cap. They were moving at a certain distance of the working faces and while one of them was hiding in a nearby gallery, the other one, armed with a pole bearing a burning wick at its end, was approaching by crawling until the flame of the wick was beginning to grow. He then was laying, face to the ground with his clothes soaked and was lifting the pole to the top of the excavation. This was producing a detonation which often had the effect of seriously injuring the gunner. He was rescued by his colleague."

Ponies carrying a lit candle were also used. They were watered then sent to the galleries in the hope of creating tiny explosions.

After many accidents, the English Humphry Davy discovered in 1815 that a flame enclosed in a very fine mesh does not ignite firedamp. Miners lighting became safer.


The practice of the "penitent " or "gunner " was gradually outlawed in the mines around 1835, after the Davy lamp being almost universally used in France since 1823.

This lamp, which was called "the Davyne" in France, seemed likely to provide all the necessary safety guarantees against ignition of firedamp but after many explosions occurred in coal mines where this lamp was used, it was soon demonstrated it was not flawless, and that it could only reduce the chances of explosions, without preventing them in all cases. In particular, it had the following defects:

- The inflammation of a mixture of air and carbon hydrogen can occur through the metallic canvas, in galleries where there is a quick airflow, because then, the lamp flame blushes the mesh or passes through.

- The slightest shock can deform or even tear open the mesh, and thus render the lamp ineffective.

- The metal-mesh in contact with the oil reservoir, is soon greased and traps fuel dust, thus forming a paste which can be ignited, both inside and outside.

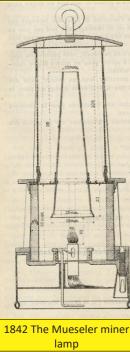

In 1842 the Liège Mathieu-Louis Mueseler invented a lamp that had the following advantages:

- It is quickly extinguished when there is plenty of explosive gases, even in a mixture with pure hydrogen.

- It shines best and can be placed away from the worker and free tools, and best suited in galleries having strong air streams.

- The wire mesh, being remote from the tank, do not permeate to oil. Only a dry dust can stick but it is easily removable.

- It is provided with two wire meshes, one horizontal and the other vertical, so that one remains intact when the second is to be torn.

- Finally, the air flow to activate the combustion is from top to bottom instead of being laterally, provision that gives the inestimable advantage over all other safety lamps, of turning off suddenly when the air is charged with sufficient carbon hydrogen to provide an explosive mixture.

This lamp spread in the basin of Seraing and other coal centers in Belgium and, in 1864, its use was prescribed by the Belgian Government. It was then adopted in a number of mines in France and England.

Lighting miners became safer. The use of these lamps, however remained linked to the respect of safety, and there were many accidents resulting from human carelessness. Here is an example, one of my ancestors, Auguste-Joseph Jumeau, was one of the victims:

On Saturday, March 6, 1852, at the pit "Ferrand " at Elouges in The Borinage (Belgium), the morning shift just came down in the galleries, it was the last day of work in this mine, as it should be closed to allow upgrades and safety works. The pit had a small diameter and allowed a two buckets traffic only (large casks used to bring the coal up to the surface and the movements of people) attached to hemp ropes.




At 20 meters of the hanging point, at the entrance of a gallery, was a tank containing water for the mine horses. Around 10 AM, the worker in charge of treating horses went there to draw water. As the lamp did not light enough (probably a Davy lamp type), he imprudently opened it. As soon as the flame in contact with the atmosphere, an explosion rocked the mine. The horse trainer was thrown against a wall and was horribly burned. He survived nevertheless. His many companions were less fortunate: 63 miners, men, women and children were killed.



Electrical miner lamp

A risk still remained to be solved: The ignition of the lamp, which forced to back it out of the well if accidentally extinguished. In the 1890's, when kerosene replaced oil in lamps, electric ignition systems for miner lamps were tested, having enclosures that did not let the flame out (Patent by William Ackroyd, Morley, England).

The first electric portable lamps with batteries offered at the Academy of Sciences of Paris en1862 by MM. Dumas and Benoit, did not definitely meet safety requirements, unlike earlier expectations that set forth their lighting tube enclosed in a sealed tube as not fearing the ignition of firedamp (featured in the Journal of Industrial Engineering, July 1863).

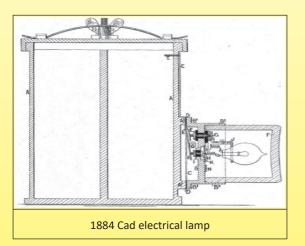

In 1884, English Theophilus Cad, from Forest Gate, England, invented an electric lamp whose switch was enclosed in what can be considered the first electrical flameproof enclosure (British Patent No. 806 of 5 January 1884).

Timidly used from 1890, electric lamps grew very slowly between 1920 and 1930.

But shortly after the introduction of electricity in coal mines, it was also discovered that lethal explosions could be initiated by fixed electrical equipment such as lighting, signals or motors.

Around 1910, 12 volts DC signaling systems considered safe appeared.

However, in October 1913, took place the largest explosion of British mines, that of Senghenydd Colliery, where 439 miners perished. It was suspected an alarm system, consisting of two parallel bare wires running along the galleries, which allowed any miner wishing to report a problem to the surface to make it by contacting momentarily the two wires with a metal tool. But the bell inductance coils caused a spark, which was probably the cause of the explosion. It was then determined that these products might be secured by a careful design, the forerunner of the "intrinsic safety". Following this disaster, the miners demanded the withdrawal of the electrical equipment of pits. Then began the development of electric devices called "explosion proof", which inevitable sparks could only occur in a protective envelope preventing from igniting the surrounding gas.

Historically, the topic of Hazardous (Classified) Locations first appeared in the National Electrical Code (NEC) in 1923, when a new article entitled "Extra-Hazardous Locations" was accepted. This article addressed rooms or compartments in which highly flammable gases, liquids, mixtures or other substances were manufactured, used, or stored.

In the investigations leading to approval of loading and conveying machines the bureau is guided by the provisions of Schedule 2C. issued on February 3, 1930. This schedule classified the various electrical parts according to their liability to sparking and specified the type of enclosure to be used for each class. As required by the schedule, a part that may produce sparks during normal operation must be enclosed in an explosion-proof casing; that is, an explosion of gas in such a casing must not ignite the gas surrounding the casing or discharge flames from any joints, bearings, or lead entrances. The object of the bureau's investigations is therefore to determine by test and inspection whether or not the enclosures are suitable to the purpose for which designed. The explosion-proof qualities are demonstrated by tests in which gas is exploded within the casings. Other tests are made to check the adequacy of electrical clearances and insulation. In addition to the tests, a detailed inspection of parts, including a careful check against drawings and specification is made. These drawings constitute the chief record of the equipment investigated



and therefore must be complete in detail to cover adequately the construction to be approved. A description of test equipment and methods followed in conducting these investigations is given in Bureau of Mines Bulletin 305, Inspection and Testing of Mine-Type Electrical Equipment for Permissibility, published in 1929.

In Europe, the first German standards on "The protection of electrical installations in hazardous areas " were published in 1935, and gave guidelines for the installation of electrical equipment in hazardous areas. In 1938 appeared a fundamental change dividing the installation requirements (VDE 0165) and the design requirements of products (VDE 0170 / 0171).

Standards of product design included the types of basic protection against explosions such as flameproof enclosures, immersion in oil and increased safety. Components were designed to be protected against explosions and housed in industrial type housings that were resistant to weathering. This led to the development of flameproof components mounted inside increased safety housings. Devices designed to this standard were marked with the symbol (Ex). During the 1960's, the European Community was founded to establish a free trade area in Europe. To reach this goal, technical standards needed to be harmonized. Consequently, the European Organisation for Electrotechnical standardization (CENELEC) was created. A new set of European standards describing devices for explosive environments (EN 50014 - EN 50020) was published in 1972. In 1975, the first EU directive for devices used in hazardous areas, known as "Directive on the protection against explosions ", was published. In 1978, the first edition of European standards was published by CENELEC which covered installation techniques.

It must be noted that the standards were taking in account the original comments of Davy on the gas inflammation in contact with the overheated protection grid of miners lamps by issuing rules about the surface temperature of enclosures (T), and also the minimum interstice to avoid the flame passage "e".

IEC standards currently in force in 2014 for equipment for explosive atmospheres are:

- IEC 60079-1: Flameproof enclosures " d ",
- IEC 60079-2: Envelopes internal pressure " p "
- IEC 60079-5: Powder filling " q ", IEC 60079-6: Oil immersion " o ",
- IEC 60079-7: Increased safety " e ",
- IEC 60079-11: Intrinsic Safety " i ",
- IEC 60079-15: Type of protection " n "
- IEC 60079-18. Encapsulation " m ".
 - They are supplemented by the following equipment standards:
- IEC 60079-25,
- IEC 60079-26,
- IEC 62013-1,
- IEC 62086-1.

At their transcription into European standards, the IEC prefix is replaced by EN.

Protections systems against explosions used in products described in this catalogue

Electromechanical thermostats have an important characteristic that makes critical their use in potentially explosive atmospheres: The opening and closing of their electrical contact, which occurs regularly during their normal operation, produces a spark between the contacts. If they are not intended and designed specifically for being used in hazardous areas, their use becomes particularly dangerous because this spark is sufficient to ignite the surrounding atmosphere.

Historically, the solution was to use standard thermostats, and enclose them in a cast iron enclosure, with large sealing surfaces and a minimum gap between cover and frame, (described as "d" style enclosures in EN 60079-1, formerly EN50018), so that if an explosion occurred around the electrical contact, it could not extend outside the enclosure. This resulted in heavy, massive and bulky devices because this enclosure had itself to withstand the explosive ignition of the gas mixture which filled it.

Although this solution is still used by some manufacturers, we have developed over the past 10 years a concept for light and compact products, limiting the flameproof area to the immediate environment of the switch.

This solution allows for devices with a direct output cable (or wires), avoiding the electrical connection inside the enclosure. Thermostats, whose sizes are similar to conventional thermostats can be incorporated, according to the customer's choice, in their own mechanical protection enclosure and electrical connection is carried away in a junction box that meets the applicable requirements of environment and hazardous areas standards. This is the reason why you will find different types of thermostats for explosive atmospheres in this catalog:

- Thermostats with wires electrical connection: (They are those having the smallest footprint) to allow installation and connection in a increased safety (Ex 'e') enclosure, but because of their components approval, it is required to apply for an additional approval of the customer enclosure with all its equipment. This solution, although these models of thermostats are the most economical, is therefore valid for large quantities applications only.

- Thermostats with cable electrical connection: In these devices, the thermostat and cable are considered as a product, and meet the hazardous area requirements if their installation instructions are fulfilled. In particular, they can be used without additional protective enclosure, by, for example, mounting them directly on a panel. It is not necessary to request an additional certificate. This solution also allows mounting the thermostat in a mechanical and ingress protection enclosure, which is not certified as equipment for explosive atmospheres. However, the cable must be mechanically protected, and the connection at its end must be made in a increased safety (Ex 'e') approved junction box or outside the hazardous area.

- Thermostats incorporated inside increased safety metal enclosures, (Ex approval " d " + " e ").

The explosion-proof thermostat is installed and connected in an increased safety enclosure, specially designed for thermostat. This solution allows electrical connection inside the housing, but does not allow thermostat set point adjustment by opening the enclosure when energized. The cable exits and the capillary cable gland must be Ex-" e " certified cable glands, and the terminals are also Ex-" e " certified, and cannot be modified or replaced by other models without cancelling the approval.

Section 3 Alphabetical product list, and numerical reference list

Contact us

Cat4-3-3-1

Alphabetical product list, and numerical reference list



Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

	Referer	nces list	
4VA1B30*0F5040D0	4XB1B60*0FA595D0	KAA000100VCA4	UXV3014059310B1
4VA1B30*0F7060D0	4XB1B60*0FB0A0D0	KAA000200VDA4	UXV3015056990B1
4VA1B30*0F8070D0	4XB1B60*0FD0C0D0	KAA000300VEA4	UXV6010557010B1
4VA1B30*0FA090D0	4XB1B60*0FE0D0D0	KAA020400VFA4	UXV6011057210B1
4VA1B60*0F5040D0	4XB1B60*0FG0F0D0	KAA020500VAA4	UXV6013058510B1
4VA1B60*0F7060D0	4YC1A10*0F5040D0	KAA-20050VBA5	UXV6014059310B1
4VA1B60*0F8070D0	4YC1A10*0F7060D0	KAA000100VCA5	UXV6015056990B1
4VA1B60*0FA090D0	4YC1A10*0F7565D0	KAA000200VDA5	UZV1005053810B1
4VA1D00*0F5040D0	4YC1A10*0F8070D0	KAA000300VEA5	UZV1007055010B1
4VA1D00*0F7060D0	4YC1A10*0F8575D0	KAA020400VFA5	UZV1008055710B1
4VA1D00*0F8070D0	4YC1A10*0F9080D0	KAA020500VAA5	UZV1010056710B1
4VA1D00*0FA090D0	4YC1A30*0F5040D0	KAA-20050VBA6	UZV3005053810B1
4VB1B30*0F5040D0	4YC1A30*0F7060D0	KAA000100VCA6	UZV3007055010B1
4VB1B30*0F7060D0	4YC1A30*0F7565D0	KAA000200VDA6	UZV3008055710B1
4VB1B30*0F8070D0	4YC1A30*0F8070D0	KAA000300VEA6	UZV3010056710B1
4VB1B30*0FA090D0	4YC1A30*0F8575D0	KAA020400VFA6	UZV6005053810B1
4VB1B60*0F5040D0	4YC1A30*0F9080D0	KAA020500VAA6	UZV6007055010B1
4VB1B60*0F7060D0	4YC1A60*0F5040D0	KAA-20050VBAK	UZV6008055710B1
4VB1B60*0F8070D0	4YC1A60*0F7060D0	KAA000100VCAK	UZV6010056710B1
4VB1B60*0FA090D0	4YC1A60*0F7565D0	KAA000200VDAK	Y401N2N500001
4VB1D00*0F5040D0	4YC1A60*0F8070D0	KAA000300VEAK	Y401N7N800001
4VB1D00*0F7060D0	4YC1A60*0F8575D0	KAA020400VFAK	Y402N5N500001
4VB1D00*0F8070D0	4YC1A60*0F9080D0	KAA020500VAAK	Y402N8N800001
4VB1D00*0FA090D0	66CP01*****	KAA-20050VBAL	Y414N2N5N5N51
4XA1B00*0FA595D0	66CP02*****	KAA000100VCAL	Y414N7N8N8N81
4XA1B00*0FB0A0D0	66EN1	KAA000200VDAL	Y9120000001
4XA1B00*0FD0C0D0	66EN2	KAA000300VEAL	Y91202000001
4XA1B00*0FE0D0D0	66ME006*******	KAA020400VFAL	Y94VB2C1E1004CC1*
4XA1B00*0FG0F0D0	66MG006******	KAA020500VAAL	Y94VB2C1E1004CC2*
4XA1B30*0FA595D0	66MQ006	KAA-20050VBAM	Y94VB2C1E2010DC1
4XA1B30*0FB0A0D0	66MZ006******	KAA000100VCAM	Y94VB2C1E2010DC2
4XA1B30*0FD0C0D0	6YTEW16S0F50100	KAA000200VDAM	Y94VB2C1E3020DC1
4XA1B30*0FE0D0D0	6YTEW26S0F50110	KAA000300VEAM	Y94VB2C1E3020DC2
4XA1B30*0FG0F0D0	6YTEW36S0F50120	KAA020400VFAM	Y94VB2C1E4030DC1
4XA1B60*0FA595D0	6YTEW46S0F60130	KAA020500VAAM	Y94VB2C1E4030DC2
4XA1B60*0FB0A0D0	6YTEW56S0R60000	KAA-20050VBAN	Y94VB2C1E5040DC1
4XA1B60*0FD0C0D0	6YTEW66S0R70000	KAA000100VCAN	Y94VB2C1E5040DC2
4XA1B60*0FE0F0D0	6YTQTV47	KAA000200VDAN	Y94VB2C1E7060DC1
4XA1B60*0FG0F0D0	6YTQTV67	KAA000300VEAN	Y94VB2C1E7060DC2
4XB1B00*0FA595D0	6YTQTW46	KAA020400VFAN	Y96J9000S900001
4XB1B00*0FB0A0D0	6YTQTW66	KAA020500VAAN	Y96J9000S900003
4XB1B00*0FD0C0D0	6YTQUVA5	UXV1010557010B1	Y97KAA000060S51K
4XB1B00*0FE0D0D0	KAA-20050VBA3	UXV1011057210B1	Y97KAA004040S41K
4XB1B00*0FG0F0D0	KAA000100VCA3	UXV1013058510B1	Y97KAA-10040S21K
4XB1B30*0FA595D0	KAA000200VDA3	UXV1014059310B1	Y97KAA-35035S11K
4XB1B30*0FB0A0D0	KAA000300VEA3	UXV1015056990B1	Y98KAA000060L51K
4XB1B30*0FD0C0D0	KAA020400VFA3	UXV3010557010B1	Y98KAA004040L41K
4XB1B30*0FE0D0D0	KAA020500VAA3	UXV3011057210B1	Y98KAA030090L61K
4XB1B30*0FG0F0D0	KAA-20050VBA4	UXV3013058510B1	Y98KAA030110L71K

Contact us

www.ultimheat.com

Cat4-3-3-3





Y98KAA050200L81K	Y99KAA-10040221K	Y9HKAA050200L81K
Y98KAA050300L91K	Y99KAA-35035211K	Y9HKAA050300L91K
Y98KAA-10040L21K	Y9GKAA000060S51K	Y9HKAA-10040L21K
Y98KAA-35035L11K	Y9GKAA004040S41K	Y9HKAA-35035L11K
Y99KAA000060251K	Y9GKAA-10040S21K	Y9IKAA000060251K
Y99KAA004040241K	Y9GKAA-35035S11K	Y9IKAA004040241K
Y99KAA030090261K	Y9HKAA000060L51K	Y9IKAA030090261K
Y99KAA030110271K	Y9HKAA004040L41K	Y9IKAA030110271K
Y99KAA050200381K	Y9HKAA030090L61K	Y9IKAA050200381K
Y99KAA050300391K	Y9HKAA030110L71K	Y9IKAA050300391K

Y	Y9IKAA-1004022	1K
Y	Y9IKAA-3503521:	1K
	Y9Z0000000	
	Y9Z20000000	
	Y9Z20200000	
	Y9Z20202000	
	Y9Z20202020	

Update 2023/11/17

Section 4 Miniature temperature limiters, wire or cable electrical connections

Contact us

Cat4-3-4-2

Technical introduction on Thermostats for potentially explosive environments

First part

Electromechanical thermostats for use in industrial hazardous environments. For industrial non-hazardous environments see catalogues 1, 2 and 3

6 essential requirements for all thermostats on potentially explosives areas

6 essential requirements for all thermostats on potentially explosives areas					
Requirement N°1	Requirement N°2	Requirement N°3			
Types of explosive zones: - Zone 0 for gases, (20 for dust): Explosive atmosphere present permanently or for long periods (more than 1000 hours per year), in normal operation. In this area, the danger is permanent, long-term or frequent - Zone 1 for gases, (21 for dust): Explosive atmosphere present occasionally (between 10 and 100 hours per year), in normal operation. In this area, danger is occasional - Zone 2 for gases, (22 for dust): Explosive atmosphere present accidentally in the event of a malfunction or for short periods of time (less than 10 hours per year), in normal operation. In this area, danger is rare. Described by standards: IEC60079-0, GB3836.1 Unless otherwise specified in the technical data sheets, our thermostats are approved for use in zone 1 (11 for dust) and zone 2 (12 for dust)	Classification of types of gases and explosive dust: Electromechanical thermostats are devices that frequently produce sparks between contacts during normal operation. Their design must therefore consider their resistance to an explosion occurring inside their protective envelope, without it being able to propagate outside. The class of resistance to this explosion is dictated by the force of this explosion, which varies depending on the types of gas and dust. Gases are classified according to their increasing explosiveness. - Group I: Methane (Usual in mines under the name firedamp) - Group IIA: Propane - Group IIB: Ethylene - Group IIB: Ethylene - Group IIC: Hydrogen and acetylene (the most dangerous) Dusts are classified as follows: - Group IIIA: Lint and combustible wires - Group IIIC: Conductive dust - Group IIIC: Conductive dust - Group IIIC: Conductive dust (the highest protection class) Described by standards: IEC60076-0:15:3, IEC60034-1, and GB3836.1:15:3 Unless otherwise specified in the technical data sheets, our thermostats are approved for use in the presence of hydrogen and acetylene: Group IIC (the highest classification, including all other types of gas) and group IIIC for dust (the highest classification, including electrically conductive dust)	Equipment Protection Level: Because thermostats produce sparks in normal operation, their electrical rating is significant, and internal mechanical movements can occur in normal operation, the authorized protection modes that can be used are limited, these are: - Type "d" so-called "explosion-proof" enclosures. These envelopes contain the explosion inside without it being able to propagate outside. The movements of the external measuring elements necessary for the operation of the thermostat are made through very precise wall crossings with very limited gap. - Type "m" enclosures: Contacts which could ignite an explosive atmosphere with sparks are enclosed in a resin in such a way that this explosive atmosphere cannot penetrate and ignite. Only a few miniature thermostats with a fully internal measuring element can use this technique. The exact classification used is "mb" the letter "b" meaning "high protection", (safe after a malfunction). This "mb" classification authorizes use in mines. The classification of protective enclosures against explosive dust is classified "t". The exact classification used is "tb" the letter "b" meaning "high protection, (safe after a malfunction). This "tb" classification authorizes use in mines. Described by standards: IEC60079-1; GB3836.1; IEC60079-18; GB/T 3836.9; IEC60079-31; GB/T 3836.31 The technical sheets in this catalogue describe the protection mode used: "db", "mb" or "tb"			


Explosion proof thermostats

2	

Requirement N°4	Requirement N°5	Requirement N°6
Connection method and insulation. between ground and live conductors. - In the design of thermostat boxes with "mb" type protection, particular attention is paid by the standards against the risks of electric arcs and the parts of the box connected to ground. This requirement is particularly critical because the additional electrical insulation of the measuring elements, which must be in thermal contact with the walls of the device they control, is a priori incompatible with their correct operation. Only JPCI was able to get around this (patented) obstacle. - For type "d" and "e" enclosures, depending on the enclosure models, the equipotential grounding is external and internal (Aluminum enclosures) or simply internal (PPS enclosures), and its section is 4mm ² or 6mm ² . Described by standards: IEC 60079- 18.7.5.3; GB GB/T 3836.9:7.5.4; IEC60076-0:15:3, IEC60034-1; GB3836.1:15:3 In this catalogue, all thermostat boxes include one or more grounding terminals, with the exception of miniature thermostats with "mb" protective casing whose small size does not allow a terminal to be incorporated for this purpose, and whose grounding is carried out by fixing their housing to a support.	Electrical connections to the outside. When explosion protection is achieved by the method of construction, thermostats still need to be connected to a power supply and to the device they are to regulate. Traditionally this connection was made inside an explosion-proof box containing a terminal block. The weight and cost of these massive boxes have now made the technique evolve towards thermostats in small boxes with direct outputs by wire, in "d" or "mb" type envelopes, themselves included in light boxes with "e" type increased safety comprising terminal blocks and cable glands. This solution is lighter and more economical. This configuration therefore includes a mixed "d+e" or "mb+e" approval, which is found on a large part of our devices. <i>Described by standards: IEC 60079-7;</i> <i>GB/T 3836.3</i> In this catalogue you will find: - Thermostats already incorporated in "e" type boxes including a connection terminal block and cable glands for the passage of electrical cables. - Thermostats with a direct electrical output via wires or cables, to be installed or simply connected in a "g" or "e" type box.	Case temperature "T" and ambient. temperature "T amb. ". These two parameters should not be confused - The temperature of the box in normal operation, placed in an environment of 25°C, is given by its self-heating by Joule effect of the internal conductors and contacts. The higher this temperature, the greater the risk of ignition of explosive gases upon contact. This T classification is given according to the following coding (class, maximum temperature) T1: 450°C T2: 300°C T3: 200°C T4: 135°C T5: 100°C T6: 85°C For thermostats, common T classes are T4, T5, T6. In the case of protection against explosive dust, the temperature is given in °C - The ambient temperature is that of the atmosphere around the envelope. In the case of bulb and capillary thermostats, this ambient temperature can modify the calibration of the device. It is also possible that the thermostat measuring element is placed in a location where it measures a temperature higher than the class T of the enclosure (oven, tank, etc.) In the case of thermostats measuring a wall temperature, the limits given by class T must not be exceeded. Described by standards: IEC 60079-0: 5; GB/T 3836.1: 5. In the pages of this catalogue, the maximum temperature authorized for the body of the thermostats (Tamb.) is indicated, as well as the maximum temperature value of the envelope(for dust) appear in its approval. Particular attention must be paid to respecting these values.

And many other mandatory rules apply to thermostats: Their electrical rating, their operating voltage, their electrical lifespan etc., according to EN 60730 and UL 60730 standards. As with each requirement of the standards, everything is designed accordingly and carefully verified and tested in our own UL and CE recognized laboratory and by additional certification tests carried out by TÜV and UL.

Miniature current sensing temperature limiters up to 100°C (212°F), surface mounting, cable connection

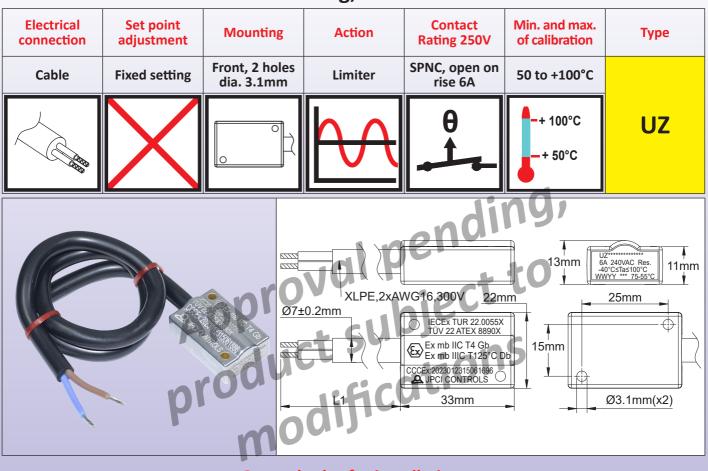

General rules for installation:

te: These limiters are intended to control temperatures in gas or dust hazardous areas.

rdous areas, this equipment is approved as "Ex-mb" and is suitable for use in zone 1 and zone 2, gas drogen/Acetylene, the highest protection group), with a temperature classification T4; irdous areas, this equipment is approved as "Ex-mb", suitable for use in, zone 21 and zone 22, the dust

electric conductive dust, the highest protection group), maximum allowed equipment temperature 125°C.

at electrical connections at the end of the wires must be made inside an EX-"e" enclosure.

ese thermostats are certified: ATEX: TÜV 22 ATEX 8890 X; IECEx: TUR 22.0055X.

ninum. 33 × 13 × 22mm

sensing element: Current sensitive miniature bimetal disc

nection: XLPE insulated cable, 2 × AWG16 (~2 × 1mm²), 300V, UL style 4411, withstanding -40+125°C Nire ends with crimped terminals.

e enclosure body

These limiters are factory calibrated, with no adjustment possible by user. Calibration values are checked ncapsulation. They are checked with a pilot load at nearly 0 Amp.

noles dia 3.1mm 25mmx15mm distance

ne: These limiters are not designed to respond quickly if the temperature rise rate is higher than 0.5°C

p action contact, SPNC, open by temperature rise

ng: 6A 240V resistive and 2A 240V inductive (10,000 cycles). Suitable for power control, remote control or PLCs circuits.

These devices use silver contacts or silver alloy contacts. Due to the possible oxidation of the contacts in time, we do not recommend the use of AC or DC low-voltage circuits (24V or less) if the switched intensity is less than 100mA, or the switched power less than 800mW.

Current derating: These devices are current sensitives and the real opening temperature must be decreased depending of the current in the circuit where they are used.

Amps	3A	5A	7A
Derating	-2.5°C	-5°C	-10°C

A KA

permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Because of



Thermostats for incorporation, wire and cable electrical connections



For example: A limiter calibrated at 100°C with cut a 90°C if the current is 7Amps **Short circuit trip time:** If for any reason there is an overload in the circuit, the limiter will open automatically. The table hereunder provides the tripping in seconds, depending of the overload. Measurement made with a thermostat at 25°C (77°F) ambient temperature

	15A	20A	25A	30A	35A	40A
Calibration at 100°C	100s	30s	11s	5s	2.5s	1s


Classification:

Gas: ll 2G Ex mb IIC T4 Gb Dust: ll 2D Ex mb IIIC T125°C Db

Main part numbers							
Open temperature ±5°C, (±9°F)	Close temperature ±5°C, (±9°F)	Part numbers with 1m long cable (L1)	Part numbers with 3m long cable (L1)	Part numbers with 6m long cable (L1)			
50°C (122°F)	38°C (100°F)	UZV1005053810B1	UZV3005053810B1	UZV6005053810B1			
70°C (158°F)	50°C (122°F)	UZV1007055010B1	UZV3007055010B1	UZV6007055010B1			
80°C (176°F)	57°C (135°F)	UZV1008055710B1	UZV3008055710B1	UZV6008055710B1			
100°C (212°F)	67°C (153°F)	UZV1010056710B1	UZV3010056710B1	UZV6010056710B1			

<u>(x</u>)

Current sensing miniature temperature limiters, calibration up to 150°C (302°F), surface mounting, cable connection

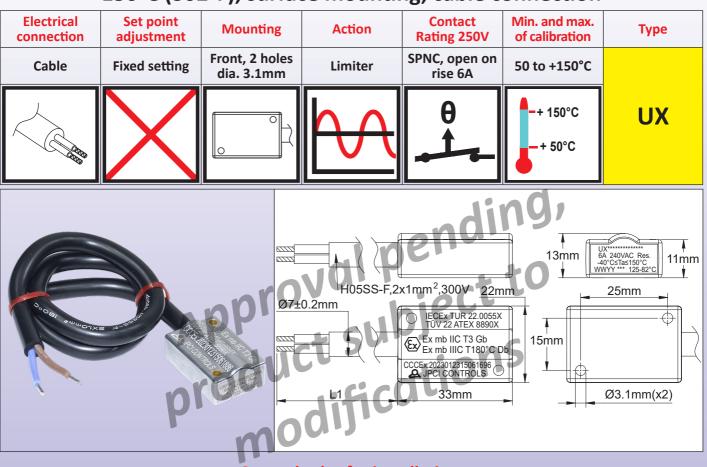

General rules for installation:

Important note: These limiters are intended to control temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-mb" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T3;

For dust hazardous areas, this equipment is approved as "Ex-mb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 180°C. The thermostat electrical connections at the end of the wires must be made inside an EX-"e" enclosure.

Approvals: These thermostats are certified: ATEX: TÜV 22 ATEX 8890 X; IECEX: TUR 22. 0055X.

Housing: Aluminum, 33 × 13 × 22mm

Temperature sensing element: Current sensitive miniature bimetal disc

Electrical connection: H05SS-F silicone insulated cable, 2×1 mm² ($\approx 2 \times AWG16$), 300V, withstanding -60+180°C (-76+356°F). Wire ends with crimped terminals.

Ground: By the enclosure body

Adjustment: These limiters are factory calibrated, with no adjustment possible by user. Calibration values are checked on it before encapsulation. They are checked with a pilot load at nearly 0 Amp.

Mounting: 2 holes dia 3.1mm 25mmx15mm distance

Response time: These limiters are not designed to respond quickly if the temperature rise rate is higher than 0.5°C per minute

Contacts: Snap action contact, SPNC, open by temperature rise

Electrical rating: 6A 240V resistive and 3A 240V inductive (10,000 cycles). Suitable for power control, remote control of relay coils or PLCs circuits.

These devices use silver contacts or silver alloy contacts. Due to the possible oxidation of the contacts in time, we do not recommend the use of AC or DC low-voltage circuits (24V or less) if the switched intensity is less than 100mA, or the switched power less than 800mW.

Current derating: These devices are current sensitives and the real opening temperature must be decreased depending of the current in the circuit where they are used.

Amps	3A	5A	7A
Derating	-2.5°C	-5°C	-10°C

•	₹.
-	5
	ŏ
	<u> </u>
	ō
	Ē
	ā
	<u> </u>
	0
	<u> </u>
1	₽.
	≥
	_
	2
	Ψ.
2	÷.
	σ
	ō
	Ξ
	-
	8
1	~
	<u> </u>
	Ŋ
	<u> </u>
	2
	F
	\geq
	0
	d)
	ŭ
	σ
1	Q
ſ	
	Ø
	_
	0
Ĵ	-
	Ψ
	ສ
	S
	يَ
	ê.
	θ
1	5
	~ ·
	2
	σ
	σ
	ດນ
	Š
	ē
-	5
	÷.
	5
	0
	σ
	e U
	SL.
	2
	SS
	res
	ures l
	atures (
	eatures (
	features (
	s, teatures t
	ns, features t
	ons, features t
	tions, features used on these data sheets are for guidance only and can be modified without prior
	ptions, features (
	riptions, features (
	scriptions, features u
	escriptions, teatures u
	descriptions, features t
	, descriptions, features used on these data sheets are for guidance only and can be modified without prior advi
	s, descriptions, features t
	igs, descriptions, features t
	ings, descriptions, features t
	wings, descriptions, features t
	awings, descriptions, features t
	trawings, descriptions, features t
	drawings, descriptions, features t
	s, drawings, descriptions, features t
	sts, drawings, descriptions, features u
	ucts, drawings, descriptions, features u
	ducts, drawings, descriptions, features t
	oducts, drawings, descriptions, features i
	roducts, drawings, descriptions, features t
	products, drawings, descriptions, features u
	Ir products, drawings, descriptions, features u
	vur products, drawings, descriptions, features u
	our products, drawings, descriptions, features u
	of our products, drawings, descriptions, features u
	of our products, drawings, descriptions, features u
	it of our products, drawings, descriptions, features t
	ent of our products, drawings, descriptions, features i
	nent of our products, drawings, descriptions, features t
	ment of our products, drawings, descriptions, features u
	ement of our products, drawings, descriptions, features t
	ovement of our products, drawings, descriptions, features i
	rovement of our products, drawings, descriptions, features t
	provement of our products, drawings, descriptions, features t
	mprovement of our products, drawings, descriptions, features i
	improvement of our products, drawings, descriptions, features u
	it improvement of our products, drawings, descriptions, features t
	int improvement of our products, drawings, descriptions, features u
	nent improvement of our products, drawings, descriptions, features t
	anent improvement of our products, drawings, descriptions, features i
	nanent improvement of our products, drawings, descriptions, features i
	manent improvement of our products, drawings, descriptions, features u
	ermanent improvement of our products, drawings, descriptions, features i
	permanent improvement of our products, drawings, descriptions, features i
	t permanent improvement of our products, drawings, descriptions, features i
	of permanent improvement of our products, drawings, descriptions, features i
	e of permanent improvement of our products, drawings, descriptions, features i
	se of permanent improvement of our products, drawings, descriptions, features i
	use of permanent improvement of our products, drawings, descriptions, features i
	ause of permanent improvement of our products, drawings, descriptions, features u
	scause of permanent improvement of our products, drawings, descriptions, features i
	secause of permanent improvement of our products, drawings, descriptions, features i
	because of permanent improvement of our products, drawings, descriptions, features t

/ice



For example: A limiter calibrated at 100°C with cut a 90°C if the current is 7Amps

Short circuit trip time: If for any reason there is an overload in the circuit, the limiter will open automatically. The table hereunder provides the tripping in seconds, depending of the overload. Measurement made with a thermostat at 25°C (77°F) ambient temperature

	15A	20A	25A	30A	35A	40A
Calibration at 100°C	100s	30s	11s	5s	2.5s	1s
Calibration at 110°C	150s	40s	20s	8s	4s	2.5s
Calibration at 150°C	400s	150s	45s	18s	9s	6s


Classification:

Gas: ll 2G Ex mb IIC T3 Gb Dust: ll 2D Ex mb IIIC T180°C Db

Main part numbers

Open temperature ±5°C, (±9°F)	Close temperature ±5°C, (±9°F)	Part numbers with 1m long cable (L1)	Part numbers with 3m long cable (L1)	Part numbers with 6m long cable (L1)
105°C (221°F)	70°C (122°F)	UXV1010557010B1	UXV3010557010B1	UXV6010557010B1
110°C (230°F)	72°C (162°F)	UXV1011057210B1	UXV3011057210B1	UXV6011057210B1
130°C (266°F)	85°C (185°F)	UXV1013058510B1	UXV3013058510B1	UXV6013058510B1
140°C (284°F)	93°C (199°F)	UXV1014059310B1	UXV3014059310B1	UXV6014059310B1
150°C (302°F)	100°C (212°F)	UXV1015056990B1	UXV3015056990B1	UXV6015056990B1

Miniature temperature limiters, not current sensing, calibration up to 85°C (185°F), wires connection to use when R290 highly flammable refrigerant classed A3 upon ISO 817 may be present. This is not a Ex certified product

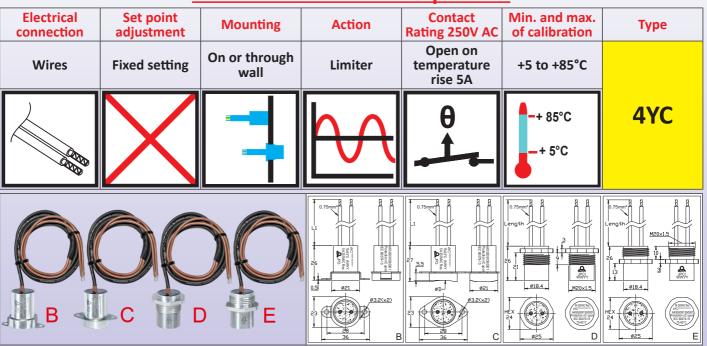

General rules for installation:

Important note: Limiter designed to comply ONLY with IEC60079-0: 2011 (Explosive atmospheres, general requirements), § 26.5.1.2 and IEC 60079-15: 2010 (Explosive atmospheres, Equipment protection by type of protection "n") § 19; 22.5.1; 22.5.2; 22.5.3.1; 22.5.3.2 and 22.5.3.3, when R290 highly flammable refrigerant classed A3 upon ISO 817, as found in air conditioning and heat pumps, may be present (See EN60335-2-40)

Approval: TÜV Test report TÜV GC/70269203

Housing: IP65 aluminum, epoxy potted, many different dimensions, see drawings

Temperature sensing element: Miniature bimetal disc, not current sensitive

Electrical connection: Two PVC insulated wires, 0.75mm², T105°C (221°F). H05VVF 300V/500V. Wire ends with crimped terminals.

Ground: By the enclosure body

Adjustment: These limiters are factory calibrated, with no adjustment possible by user. Calibration values are checked on it before encapsulation.

Mounting: Surface or through wall

Response time: These limiters are not designed to respond quickly if the temperature rise rate is higher than 1°C per minute. **Contacts:** Single pole snap action contact, open by temperature rise

Electrical rating: 5A 250V resistive (100,000 cycles). Suitable for power control, remote control of relay coils or PLCs circuits. **Option:** On request rating up to 9A 250V with 1.5mm² wires (Need certification testing)


		_		
Open temperature ±5°C, (±9°F)	Close temperature ±5°C, (±9°F)	Part numbers with 1m long wires (L1)	Part numbers with 3m long wires (L1)	Part numbers with 6m long wires (L1)
50°C (122°F)	40°C (100°F)	4YC1A10*0F5040D0	4YC1A30*0F5040D0	4YC1A60*0F5040D0
70°C (158°F)	60°C (122°F)	4YC1A10*0F7060D0	4YC1A30*0F7060D0	4YC1A60*0F7060D0
75°C (167°F)	65°C (149°F)	4YC1A10*0F7565D0	4YC1A30*0F7565D0	4YC1A60*0F7565D0
80°C (176°F)	70°C (158°F)	4YC1A10*0F8070D0	4YC1A30*0F8070D0	4YC1A60*0F8070D0
85°C (185°F)	75°C (167°F)	4YC1A10*0F8575D0	4YC1A30*0F8575D0	4YC1A60*0F8575D0

Main part numbers

: Use the body letter (C, D, E, F) described in drawings. For body letter E the exact reference (EO, E8, EA, EB) depends of mounting diameter



Miniature temperature limiters, not current sensing, calibration up to 100°C (212°F), cable or wires connection

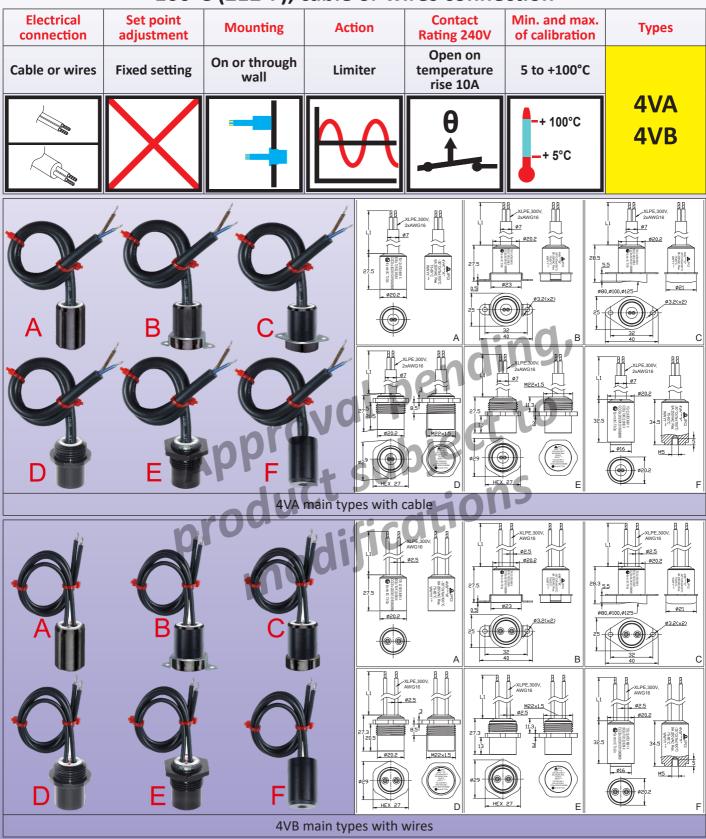

General rules for installation:

Important note: These **limiters** are intended to monitor or control temperatures in gas or dust hazardous areas. **For gas hazardous areas**, this equipment is approved as "Ex-mb" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T4;

Cat4-3-4-10

(Ex

Thermostats for incorporation, wire and cable electrical connections



For dust hazardous areas, this equipment is approved as "Ex-mb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 125°C. The thermostat electrical connections at the end of the wires must be made inside an EX-"e" enclosure. **Approvals:** These thermostats are certified: ATEX: TÜV 22 ATEX 8891 X; IECEX: TUR 22.0056X.

Housing: IP65 Anodized aluminum, epoxy potted, many different dimensions, see drawings **Temperature sensing element:** Miniature bimetal disc, not current sensitive

Electrical connection:

- 4VA: XLPE insulated cable, 2 × AWG16 (≈2 × 1.25mm²), 300V, UL style 4441, withstanding -40+125°C (-40+257°F),

- 4VB: Two XLPE insulated wires, AWG16 (≈ 1.25mm²), 300V, withstanding -40+125°C (-40+257°F),

Wire ends with crimped terminals. Other lengths on request.

Ground: By the enclosure body

Adjustment: These limiters are factory calibrated, with no adjustment possible by user. Calibration values are checked on it before encapsulation.

Mounting: Surface or through wall

Response time: These limiters are not designed to respond quickly if the temperature rise rate is higher than 0.5°C per minute

Contacts: Single pole snap action contact, open by temperature rise

Electrical rating: 10A 240V resistive (30,000 cycles) and 8A 240V inductive (6,000 cycles). Suitable for power control, remote control of relay coils or PLCs circuits.

These devices use silver contacts or silver alloy contacts. Due to the possible oxidation of the contacts in time, we do not recommend the use of AC or DC low-voltage circuits (24V or less) if the switched intensity is less than 100mA, or the switched power less than 800mW.

Classification:

Gas: 🐵 II 2G Ex mb IIC T4 Gb Dust: 🐵 II 2D Ex mb IIIC T125°C Db

Main part numbers with cable output

Open temperature ±5°C, (±9°F)	Close temperature ±5°C, (±9°F)	Part numbers with 1m long cable (L1)	Part numbers with 3m long cable (L1)	Part numbers with 6m long cable (L1)
50°C (122°F)	40°C (100°F)	4VA1D00*0F5040D0	4VA1B30*0F5040D0	4VA1B60*0F5040D0
70°C (158°F)	60°C (122°F)	4VA1D00*0F7060D0	4VA1B30*0F7060D0	4VA1B60*0F7060D0
80°C (176°F)	70°C (135°F)	4VA1D00*0F8070D0	4VA1B30*0F8070D0	4VA1B60*0F8070D0
100°C (212°F)	90°C (153°F)	4VA1D00*0FA090D0	4VA1B30*0FA090D0	4VA1B60*0FA090D0


Main part numbers with 2 wires output

		•	!	
Open temperature ±5°C, (±9°F)	Close temperature ±5°C, (±9°F)	Part numbers with 1m long cable (L1)	Part numbers with 3m long cable (L1)	Part numbers with 6m long cable (L1)
50°C (122°F)	40°C (100°F)	4VB1D00*0F5040D0	4VB1B30*0F5040D0	4VB1B60*0F5040D0
70°C (158°F)	60°C (122°F)	4VB1D00*0F7060D0	4VB1B30*0F7060D0	4VB1B60*0F7060D0
80°C (176°F)	70°C (135°F)	4VB1D00*0F8070D0	4VB1B30*0F8070D0	4VB1B60*0F8070D0
100°C (212°F)	90°C (153°F)	4VB1D00*0FA090D0	4VB1B30*0FA090D0	4VB1B60*0FA090D0

*: Use the body letter (A, B, D, E) described in drawings. For body letter C the exact reference (CO, C8, CA, CB) depends of mounting diameter



Miniature temperature limiters, not current sensing, calibration up to 150°C (302°F), cable or wires connection

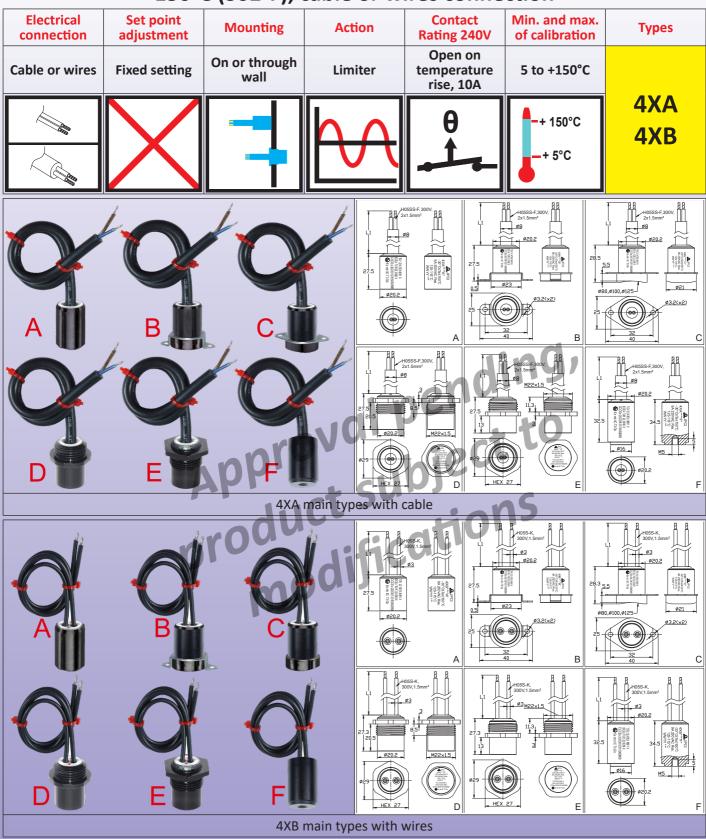

General rules for installation:

Important note: These **limiters** are intended to monitor or control temperatures in gas or dust hazardous areas. **For gas hazardous areas**, this equipment is approved as "Ex-mb" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T3;

Cat4-3-4-12

(Ex

Thermostats for incorporation, wire and cable electrical connections



For dust hazardous areas, this equipment is approved as "Ex-mb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 185°C. The thermostat electrical connections at the end of the wires must be made inside an EX-"e" enclosure. **Approvals:** These thermostats are certified: ATEX: TÜV 22 ATEX 8891 X; IECEX: TUR 22.0056X.

Housing: IP65 Anodized aluminum, silicone potted, many different dimensions, see drawings **Temperature sensing element:** Miniature bimetal disc, not current sensitive

Electrical connection:

- 4XA: Silicone insulated cable, (H05SS-F), 2 × 1.5mm² (≈ 2 × AWG16), 300V, withstanding -60+180°C (-76+356°F).

- **4XB:** Two silicone insulated wires, 1.5mm² (≈ AWG16), 300V, withstanding -60+180°C (-76+356°F).

Wire ends with crimped terminals. Other lengths on request.

Ground: By the enclosure body

Adjustment: These limiters are factory calibrated, with no adjustment possible by user. Calibration values are checked on it before encapsulation.

Mounting: Surface or through wall

Response time: These limiters are not designed to respond quickly if the temperature rise rate is higher than 0.5°C per minute.

Contacts: Single pole snap action contact, open by temperature rise

Electrical rating: 10A 240V resistive (30,000 cycles) and 8A 240V inductive (6,000 cycles). Suitable for power control, remote control of relay coils or PLCs circuits.

These devices use silver contacts or silver alloy contacts. Due to the possible oxidation of the contacts in time, we do not recommend the use of AC or DC low-voltage circuits (24V or less) if the switched intensity is less than 100mA, or the switched power less than 800mW.

Classification:

Gas: 🐵 II 2G Ex mb IIC T3 Gb Dust: 🐵 II 2D Ex mb IIIC T180°C Db

Main part numbers with cable output

Open temperature ±5°C, (±9°F)	Close temperature ±5°C, (±9°F)	Part numbers with 1m long cable (L1)	Part numbers with 3m long cable (L1)	Part numbers with 6m long cable (L1)
105°C (221°F)	95°C (203°F)	4XA1B00*0FA595D0	4XA1B30*0FA595D0	4XA1B60*0FA595D0
110°C (230°F)	100°C (212°F)	4XA1B00*0FB0A0D0	4XA1B30*0FB0A0D0	4XA1B60*0FB0A0D0
130°C (266°F)	120°C (248°F)	4XA1B00*0FD0C0D0	4XA1B30*0FD0C0D0	4XA1B60*0FD0C0D0
140°C (284°F)	130°C (266°F)	4XA1B00*0FE0D0D0	4XA1B30*0FE0D0D0	4XA1B60*0FE0F0D0
150°C (302°F)	140°C (284°F)	4XA1B00*0FG0F0D0	4XA1B30*0FG0F0D0	4XA1B60*0FG0F0D0

Main part numbers with 2 wires output

· · · · · · · · · · · · · · · · · · ·				
Open temperature ±5°C, (±9°F)	Close temperature ±5°C, (±9°F)	Part numbers with 1m long cable (L1)	Part numbers with 3m long cable (L1)	Part numbers with 6m long cable (L1)
105°C (221°F)	95°C (203°F)	4XB1B00*0FA595D0	4XB1B30*0FA595D0	4XB1B60*0FA595D0
110°C (230°F)	100°C (212°F)	4XB1B00*0FB0A0D0	4XB1B30*0FB0A0D0	4XB1B60*0FB0A0D0
130°C (266°F)	120°C (248°F)	4XB1B00*0FD0C0D0	4XB1B30*0FD0C0D0	4XB1B60*0FD0C0D0
140°C (284°F)	130°C (266°F)	4XB1B00*0FE0D0D0	4XB1B30*0FE0D0D0	4XB1B60*0FE0D0D0
150°C (302°F)	140°C (284°F)	4XB1B00*0FG0F0D0	4XB1B30*0FG0F0D0	4XB1B60*0FG0F0D0


: Use the body letter (A, B, D, E) described in drawings. For body letter C the exact reference (CO, C8, CA, CB) depends of mounting diameter

Cat4-3-4-14

Section 5 Thermostats and limiters with bulb and capillary sensing element, wires or cable electrical connection

Contact us



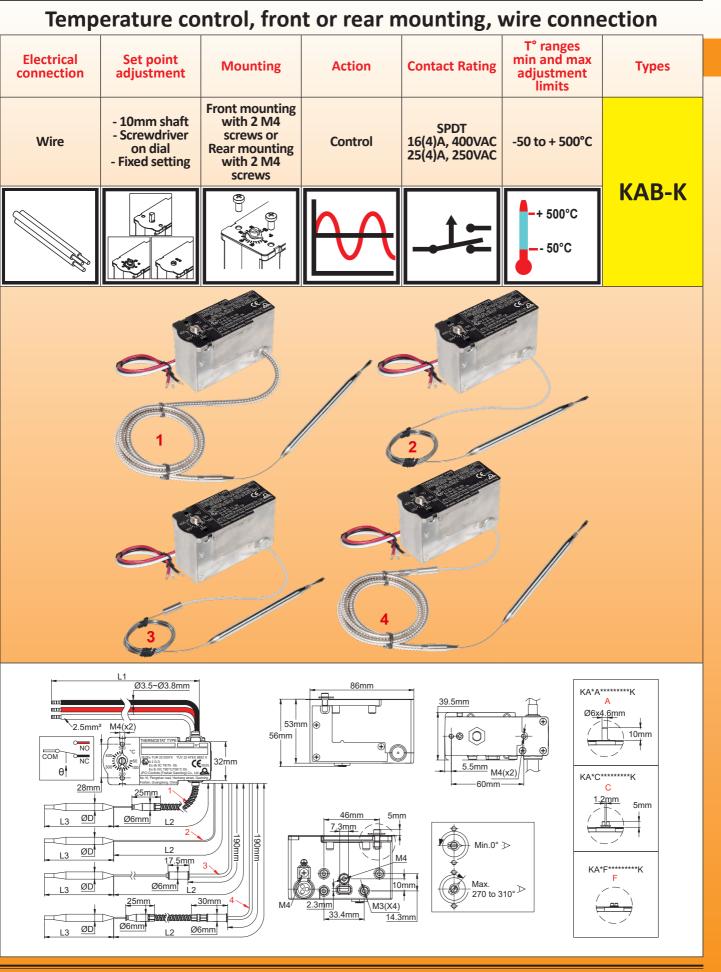

Contact us

www.ultimheat.com

Cat4-3-5-3





Types of capillary outputs

- 1: Capillary protected by a flexible stainless steel metal sheath over its entire length, right out of the thermostat body. The 6mm dia. end of the stainless-steel protective sheath is rounded to avoid shearing of the capillary, and the 6mm diameter allows the mounting of accessories such as flange or thermowell (Patented). This is the capillary protection recommended for thermostats with cable connection.
- 2: Bare 1mm capillary without any protection.
- 3: Capillary comprising a 6mm diameter brazed fitting allowing an EX "e" box outlet via a cable gland with a 6mm passage. The part of the capillary located inside the EX "e" box is protected against the risks of electrical contact by a PTFE sheath, and the external part is bare.
- 4: Capillary comprising a 6mm diameter brazed fitting allowing an EX "e" box outlet via a cable gland with a 6mm passage. The part of the capillary located inside the EX "e" housing is protected against the risks of electrical contact by a PTFE sheath, and the external part by a flexible metal sheath in stainless steel. The 6mm dia. end of the stainless- steel protective sheath is rounded to avoid shearing of the capillary, and the 6mm diameter allows the mounting of accessories such as flange or thermowell (Patented). This is the capillary protection recommended for thermostats with EX "e" box.



A: Shaft dia. 6mm, length 10mm, for use with printed knobs and bezels, or small plastic arrow knob (available as accessories below);





F: Fixed and sealed temperature adjustment

General rules for installation:

C: Screw driver type, with arrow and printed

aluminum dial, for use in PPS Ex-e enclosure

of JPCI or other suppliers for heat tracing;

Important note: These thermostats are intended to monitor or control temperatures in gas or dust hazardous areas. **For gas hazardous areas,** this equipment is approved as "Ex db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5/ T6;

For dust hazardous areas, this equipment is approved as "Ex tb", suitable for use in zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group.

The applicable ambient temperature of the equipment is:

NC: 16(4)A NO: 10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +50°C (T6/T80°C)

NC: 16(4)A NO: 10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +80°C (T5/T95°C)

NC: 25(4)A NO: 15(2)A, 125/250 VAC; 50/60 Hz; -60°C to +50°C (T5/T95°C)

The thermostat body must be mounted in an explosion-proof box and we preferably recommend an "Ex e" increased safety box, respecting the integrity of the "db" and "tb" regulations.

The outlet of the capillary from this box must be carried out by a cable gland with a gasket adapted to the 6mm diameter of the capillary connection fitting and providing the degree of protection required by the standard. The mody els with screw driver adjustment and front mounting allow incorporation inside most existing "Ex e"

junction boxes in aluminum or polyester and having inside a free height of 60mm minimum.

With an adjustment per 10mm shaft and printed knob, this minimum height is about 70mm. We recommend checking this height by requesting plans for the devices with the knob of your choice.

Approvals: These thermostats are certified:

ATEX: TÜV 22 ATEX 8892 X; IECEx: IECEx TUR 22. 0057 X. CCC: 2025012304765427

Housing: aluminum, 86 × 40 × 56mm (Dimensions without shaft and knob)

Bulb and capillary: Stainless steel. Standard capillary length 1500mm. (Other lengths available with M.O.Q). Capillary minimum bending radius 5mm.

Temperature sensing element: Oil or liquid metalloids filled bulb and capillary.

Electrical connection: Silicone insulated wire H05S-K, 2.5mm², T180°C, 450V, standard length 200mm. Wire ends with crimped terminals. Other lengths on request.

Ground terminals: one M4 grounding terminals with saddle is located on the wire exit side.

Special items: The lateral wire exit face has two M3 threads allowing 4mm² or 6mm² JPCI ATEX EX-e terminal blocks to be mounted, two more M3 threads for direct mounting of 15mm or 35mm Din rails, and one M4 thread allowing an additional earth terminal block.

Mounting: Front bracket with 2 x M4 threads, 28mm distance, or backside by two M4 screws with 60mm distance **Contacts:** SPDT, snap action contact. Electrical life 100,000 cycles.

Electrical rating: Suitable for power control, remote control of relay coils or PLCs circuits.

Voltage	Maximum rating (A) between:			
voitage	Common (white) and normally closed (black)	Common (white) and normally open (red)		
400V AC	16 (4)	10(2)		
250V AC	25 (4)	15(2)		
125V AC	25 (4)	15(2)		

Explosion proof bulb and capillary thermostats for incorporation



These devices use silver contacts or silver alloy contacts. Due to the possible oxidation of the contacts in time, we do not recommend the use of AC or DC low-voltage circuits (24V or less) if the switched intensity is less than 100mA, or the switched power less than 800mW. Contact us for those applications that require gold-plated contacts. The electrical ratings given are normalized resistive circuit values.

Options:

- Capillary sleeved with 6mm diameter stainless steel flexible tube

- Capillary with fitting for 6mm cable gland gasket, with or without capillary sleeving in stainless steel

Mechanical life: > 500.000 cycles Classification:

Gas: 🖾 II 2G Ex db IIC T5/T6 Gb

Dust: 🖾 II 2D Ex tb IIIC T95°C/T80°C Db

Main references with 200mm wire length (L1)**and capillary output type 4

							-
References with screw driver with arrow adjustment shaft	References with 10mm adjustment shaft	Temperature range	Capillary length (L2, mm)	Bulb diameter (D, mm)	Bulb length (L3, mm)	Differential (°C)	Max temperature on bulb
KABC-35035L12K	KABA-35035L12K	-35~35°C (-31~95°F)	1500	6	100	3.5±1	60°C (140°F)
KABC-10040L22K	KABA-10040L22K	-10~40°C (-14~104°F)	1500	6	130	2.5±1	70°C (158°F)
KABC-20050L32K	KABA-20050L32K	-20~50°C (-4~122°F) *	1500	6	90	3.5±1	80°C (176°F)
KABC004040L42K	KABA004040L42K	4~40°C (39.2~104°F)	1500	6	140	2±1	70°C (158°F)
KABC004040L52K	KABA004040L52K	4~40°C (39.2~104°F)	1500	8	80	2±1	70°C (158°F)
KABC000060L62K	KABA000060L62K	0~60°C (32~140°F)	1500	6	115	3±1	90°C (194°F)
KABC030090L72K	KABA030090L72K	30~90°C (86~194°F)	1500	6	110	3±1	120°C (248°F)
KABC000100L82K	KABA000100L82K	0~100°C (32~212°F)	1500	6	80	5±1.5	130°C (266°F)
KABC030110L92K	KABA030110L92K	30~110°C (86~230°F)	1500	6	85	4±1.5	140°C (284°F)
KABC000200LA2K	KABA000200LA2K	0~200°C (32~392°F)	1500	4	100	10±3	230°C (446°F)
KABC050200LB2K	KABA050200LB2K	50~200°C (122~392°F)	1500	4	120	7.5±2.5	230°C (446°F)
KABC000300LC2K	KABA000300LC2K	0~300°C (32~570°F)	1500	4	70	15±5	330°C (626°F)
KABC050300LD2K	KABA050300LD2K	50~300°C (122~572°F)	1500	4	80	12±4	330°C (626°F)
KABC050400LE2K	KABA050400LE2K	50~400°C (122~752°F)	1500	4	50	18±6	430°C (806°F)
KABC060500LF2K	KABA060500LF2K	60~500°C (140~932°F)	1500	4	120	22±8	530°C (986°F)

* The filling liquid of these thermostatic assemblies has a freezing temperature of about -50°C (-58°F). However it is important to protect the bulb and /or the capillary against the risk of freezing if a temperature below -35°C (-31°F) can be reached in operation. Acceptable storage temperature: -50°C(-58°F).

** For a longer wire, replace the 13th character (2) by 3 for 30cm, 4 for 40cm, 5 for 50cm a.s.o. For a type 1 capillary outlet: replace the 11th character (L) with G; For a type 2 capillary outlet: replace the 11th character (L) with C; For a type 3 capillary outlet: replace the 11th character (L) with P.


Accessories (to be ordered separately)

	,			cparatery/		
Dia 40mm printed knob*	Bezel for 40mm knob*	Miniature a	arrow knob*	Pipe liner crossing flange	Bulb fixing profile on pipes	
			ð	00000	 ;	
PRINTABLE AREA	28mm 28mm 28mm 04.5mm (x4) 08mm 047mm	1.2mm 1 9mm 8.5mm 8.5mm 010m	8.5mm	2mm Ø5.5mm(x4) 25mm 35mm 06.1mm 25.4mm 25.4mm	32mm 13mm 116mm 116mm 180mm 137mm	
This knob is printed according to the temperature range of the thermostat. Available in °C or °F. It is used when the thermostat is mounted from the front, with the adjustment shaft passing through the mounting board.	Allows the positioning of the temperature mark on the knob.	thermostat whe the rear in an e is greater than	nted on the en it is fixed from nclosure. Its size the arrow used <i>r</i> er adjustment.	This flange makes it possible to pass through the protective metal sheath located around the thermal insulation of the pipes, without risk of breaking the capillary. It is tightened by a bicone on the 6mm dia. end of the stainless-steel sheathing of the capillary	This profile makes it possible to securely fix with two clamps a thermostat bulb in contact with the wall of a pipe	
66MZ	66EN1	66	MQ	66KAMB35356	6YTPF160032	
Contact us www.ultimheat.com Cat4-3-5-						



Explosion proof bulb and capillary thermostats for incorporation



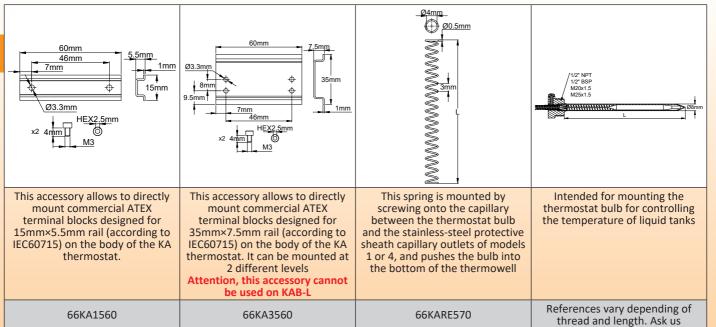


* Many other knobs and bezels are described in our catalogue N°1.

Examples of special customer and sub-assemblies (requesting additional EX approval)

KA with special mounting board for incorporation inside customer enclosure, with 6mm ² ATEX connection blocks supplied by customer	KA with standard mounting board for incorporation inside JPCI round plastic enclosure Y92, with ATEX 4mm ² JPCI connection blocks	KA with standard mounting board for incorporation inside JPCI rectangular aluminium enclosure Y97, with ATEX 4mm ² JPCI connection blocks	KA with standard 15mm Din rail mounted on the side, with 4mm ² ATEX connection blocks supplied by customer



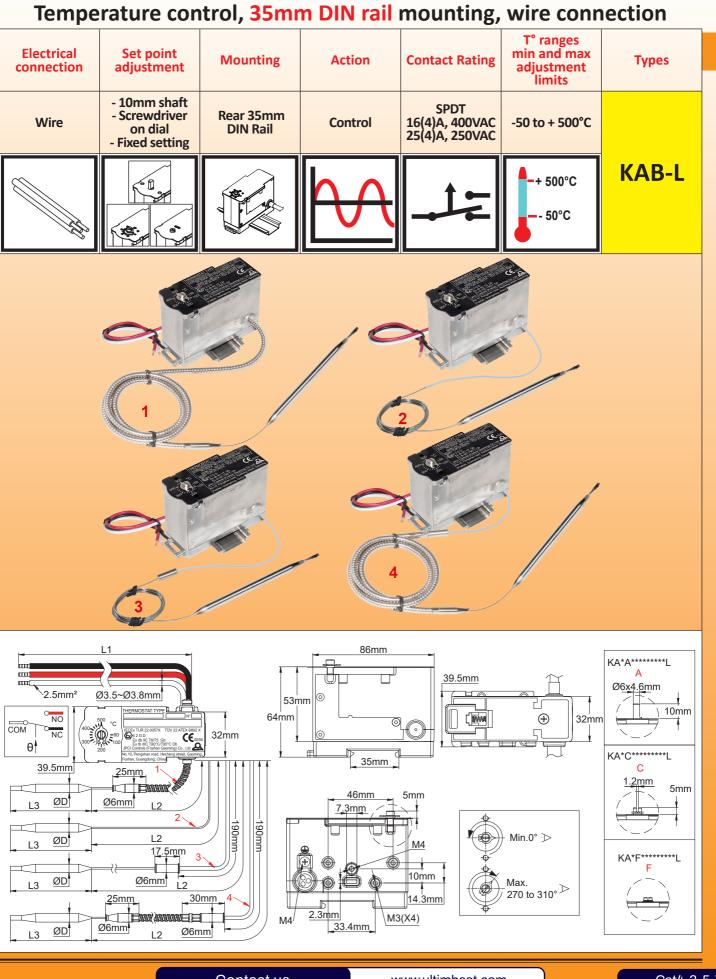

Contact us

www.ultimheat.com

Cat4-3-5-7





Types of capillary outputs

- 1: Capillary protected by a flexible stainless steel metal sheath over its entire length, right out of the thermostat body. The 6mm dia. end of the stainless-steel protective sheath is rounded to avoid shearing of the capillary, and the 6mm diameter allows the mounting of accessories such as flange or thermowell (Patented). This is the capillary protection recommended for thermostats with cable connection.
- 2: Bare 1mm capillary without any protection.
- 3: Capillary comprising a 6mm diameter brazed fitting allowing an EX "e" box outlet via a cable gland with a 6mm passage. The part of the capillary located inside the EX "e" box is protected against the risks of electrical contact by a PTFE sheath, and the external part is bare.
- 4: Capillary comprising a 6mm diameter brazed fitting allowing an EX "e" box outlet via a cable gland with a 6mm passage. The part of the capillary located inside the EX "e" housing is protected against the risks of electrical contact by a PTFE sheath, and the external part by a flexible metal sheath in stainless steel. The 6mm dia. end of the stainless- steel protective sheath is rounded to avoid shearing of the capillary, and the 6mm diameter allows the mounting of accessories such as flange or thermowell (Patented). This is the capillary protection recommended for thermostats with EX "e" box.



A: Shaft dia. 6mm, length 10mm, for use with printed knobs and bezels, or small plastic arrow knob (available as accessories below);





F: Fixed and sealed temperature adjustment

General rules for installation:

C: Screw driver type, with arrow and printed

aluminum dial, for use in PPS Ex-e enclosure

of JPCI or other suppliers for heat tracing;

Important note: These thermostats are intended to monitor or control temperatures in gas or dust hazardous areas. **For gas hazardous areas,** this equipment is approved as "Ex db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5/ T6;

For dust hazardous areas, this equipment is approved as "Ex tb", suitable for use in zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group.

The applicable ambient temperature of the equipment is:

NC: 16(4)A NO: 10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +50°C (T6/T80°C)

NC: 16(4)A NO: 10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +80°C (T5/T95°C)

NC: 25(4)A NO: 15(2)A, 125/250 VAC; 50/60 Hz; -60°C to +50°C (T5/T95°C)

The thermostat body must be mounted in an explosion-proof box and we preferably recommend an "Ex e" increased safety box, respecting the integrity of the "db" and "tb" regulations.

The outlet of the capillary from this box must be carried out by a cable gland with a gasket adapted to the 6mm diameter of the capillary connection fitting and providing the degree of protection required by the standard.

The models with screw driver adjustment and front mounting allow incorporation inside most existing "Ex e" junction boxes in aluminum or polyester and having inside a free height of 65mm minimum upside the DIN rail

With an adjustment per 10mm shaft and printed knob, this minimum height is about 75mm. We recommend checking this height by requesting plans for the devices with the knob of your choice.

Approvals: These thermostats are certified:

ATEX: TÜV 22 ATEX 8892 X; IECEx: IECEx TUR 22. 0057 X. CCC: 2025012304765427

Housing: Aluminum, 86 x 40 x 64mm (Dimensions without shaft and knob)

Bulb and capillary: Stainless steel. Standard capillary length 1500mm. (Other lengths available with M.O.Q) Capillary minimum bending radius 5mm.

Temperature sensing element: Oil or liquid metalloids filled bulb and capillary.

Electrical connection: Silicone insulated wires H05S-K, 2.5mm², T180°C, 450V, standard length 200mm. Wire ends with crimped terminals. Other lengths on request.

Ground terminals: One M4 grounding terminals with saddle is located on the wire exit side.

Special items: The lateral wire exit face has two M3 threads allowing 4mm² or 6mm² JPCI ATEX EX-e terminal blocks to be mounted, two more M3 threads for direct mounting of 15mm or 35mm Din rails, and one M4 thread allowing an additional earth terminal block.

Mounting: Rear side, on symmetrical 35mm DIN rail

Contacts: SPDT, snap action contact. Electrical life 100,000 cycles.

Electrical rating: Suitable for power control, remote control of relay coils or PLCs circuits.

	Valtage	Maximum rating (A) between:					
	Voltage	Common (white) and normally closed (black)	Common (white) and normally open (red)				
	400V AC	16 (4)	10(2)				
[250V AC	25 (4)	15(2)				
	125V AC	25 (4)	15(2)				

Contact us

Explosion proof bulb and capillary thermostats for incorporation



-9

These devices use silver contacts or silver alloy contacts. Due to the possible oxidation of the contacts in time, we do not recommend the use of AC or DC low-voltage circuits (24V or less) if the switched intensity is less than 100mA, or the switched power less than 800mW. Contact us for those applications that require gold-plated contacts. The electrical ratings given are normalized resistive circuit values.

Options:

- Capillary sleeved with 6mm diameter stainless steel flexible tube

- Capillary with fitting for 6mm cable gland gasket, with or without capillary sleeving in stainless steel **Mechanical life:** > 500.000 cycles

Classification:

Gas: 🐵 II 2G Ex db IIC T5/T6 Gb

Dust: 🖾 II 2D Ex tb IIIC T95°C/T80°C Db

Main references with 200mm wire length (L1)** and capillary output type 4

References with screw driver with arrow adjustment shaft	References with 10mm adjustment shaft	Temperature range	Capillary length (L2, mm)	Bulb diameter (D, mm)	Bulb length (L3, mm)	Differential (°C)	Max temperature on bulb
KABC-35035L12L	KABA-35035L12L	-35~35°C (-31~95°F)	1500	6	100	3.5±1	60°C (140°F)
KABC-10040L22L	KABA-10040L22L	-10~40°C (-14~104°F)	1500	6	130	2.5±1	70°C (158°F)
KABC-20050L32L	KABA-20050L32L	-20~50°C (-4~122°F)*	1500	6	90	3.5±1	80°C (176°F)
KABC004040L42L	KABA004040L42L	4~40°C (39.2~104°F)	1500	6	140	2±1	70°C (158°F)
KABC004040L52L	KABA004040L52L	4~40°C (39.2~104°F)	1500	8	80	2±1	70°C (158°F)
KABC000060L62L	KABA000060L62L	0~60°C (32~140°F)	1500	6	115	3±1	90°C (194°F)
KABC030090L72L	KABA030090L72L	30~90°C (86~194°F)	1500	6	110	3±1	120°C (248°F)
KABC000100L82L	KABA000100L82L	0~100°C (32~212°F)	1500	6	80	5±1.5	130°C (266°F)
KABC030110L92L	KABA030110L92L	30~110°C (86~230°F)	1500	6	85	4±1.5	140°C (284°F)
KABC000200LA2L	KABA000200LA2L	0~200°C (32~392°F)	1500	4	100	10±3	230°C (446°F)
KABC050200LB2L	KABA050200LB2L	50~200°C (122~392°F)	1500	4	120	7.5±2.5	230°C (446°F)
KABC000300LC2L	KABA000300LC2L	0~300°C (32~570°F)	1500	4	70	15±5	330°C (626°F)
KABC050300LD2L	KABA050300LD2L	50~300°C (122~572°F)	1500	4	80	12±4	330°C (626°F)
KABC050400LE2L	KABA050400LE2L	50~400°C (122~752°F)	1500	4	50	18±6	430°C (806°F)
KABC060500LF2L	KABA060500LF2L	60~500°C (140~932°F)	1500	4	120	22±8	530°C (986°F)

* The filling liquid of these thermostatic assemblies has a freezing temperature of about -50° C (-58°F). However it is important to protect the bulb and /or the capillary against the risk of freezing if a temperature below -35°C (-31°F) can be reached in operation. Acceptable storage temperature: -50°C(-58°F).

** For a longer wire, replace the 13th character (2) by 3 for 30cm, 4 for 40cm, 5 for 50cm a.s.o. For a type 1 capillary outlet: Replace the 11th character (L) with G; For a type 2 capillary outlet: Replace the 11th character (L) with C; For a type 3 capillary outlet: Replace the 11th character (L) with P.


Accessories (to be ordered separately)

Dia 40mm printed knob*	Bezel for 40mm knob*	Miniature arrow knob*	Pipe liner crossing flange	Bulb fixing profile on pipes
			00000	
PRINTABLE AREA	28mm 28mm 28mm 28mm 04.5mm (x4) 28mm 04.5mm (x4) 04.5mm (x4) 04.5mm (x4) 04.5mm (x4) 04.5mm (x4)	1.2mm 9mm 9mm 10mm 8.5mm 8.5mm 10.5mm 010mm 4.6mm	2mm 25.5mm(x4) 25mm 35mm Ø6.1mm 25.4mm	32mm 13mm 116mm 160mm 137mm 137mm
This knob is printed according to the temperature range of the thermostat. Available in °C or °F. It is used when the thermostat is mounted from the front, with the adjustment shaft passing through the mounting board.	Allows the positioning of the temperature mark on the knob.	To be mounted on the thermostat when it is fixed from the rear in an enclosure. Its size is greater than the arrow used with screwdriver adjustment.	This flange makes it possible to pass through the protective metal sheath located around the thermal insulation of the pipes, without risk of breaking the capillary. It is tightened by a bicone on the 6mm dia. end of the stainless- steel sheathing of the capillary	This profile makes it possible to securely fix with two clamps a thermostat bulb in contact with the wall of a pipe
66MZ	66EN1	66MQ	66KAMB35356	6YTPF160032
	Contact u	IS WW	w.ultimheat.com	Cat4-3-5




Explosion proof bulb and capillary thermostats for incorporation



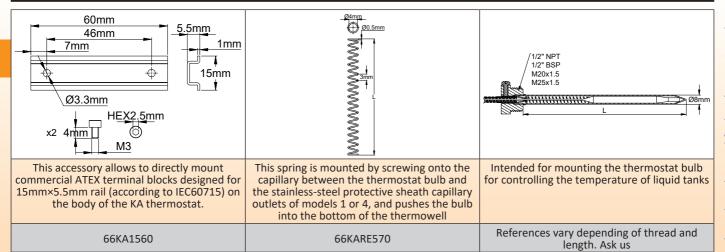


* Many other knobs and bezels are described in our catalogue N°1

Examples of special customer and sub-assemblies (requesting additional EX approval)

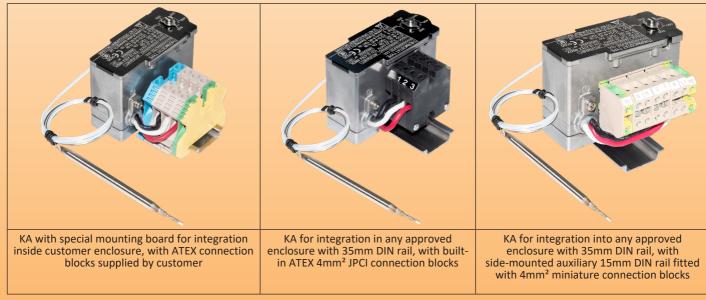



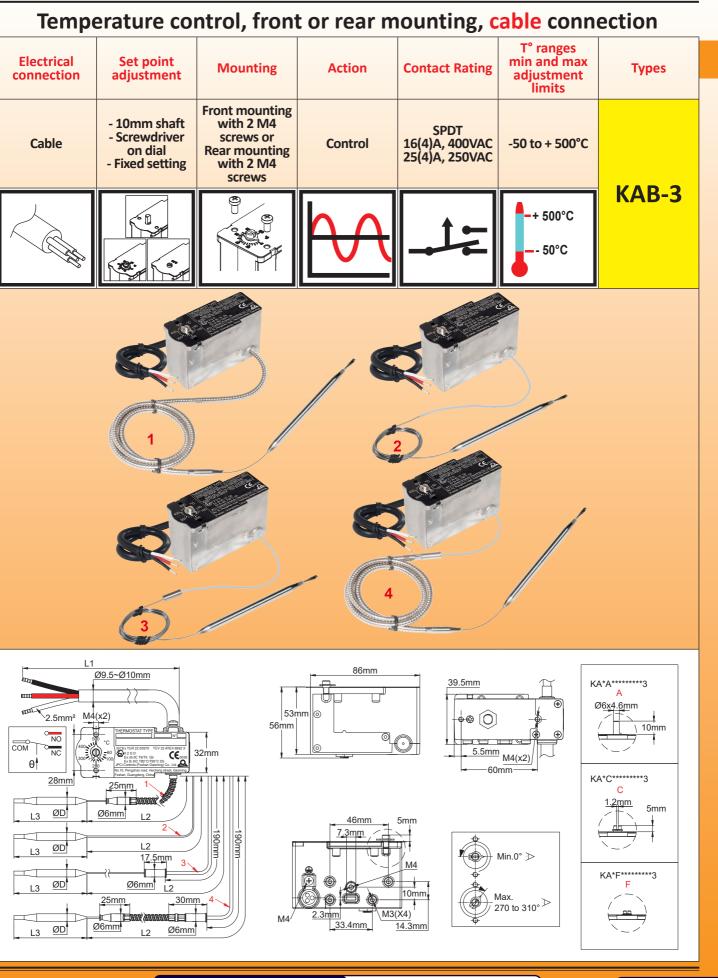

Contact us

www.ultimheat.com

Cat4-3-5-11






Types of capillary outputs

- 1: Capillary protected by a flexible stainless steel metal sheath over its entire length, right out of the thermostat body. The 6mm dia. end of the stainless-steel protective sheath is rounded to avoid shearing of the capillary, and the 6mm diameter allows the mounting of accessories such as flange or thermowell (Patented). This is the capillary protection recommended for thermostats with cable connection.
- 2: Bare 1mm capillary without any protection.
- 3: Capillary comprising a 6mm diameter brazed fitting allowing an EX "e" box outlet via a cable gland with a 6mm passage. The part of the capillary located inside the EX "e" box is protected against the risks of electrical contact by a PTFE sheath, and the external part is bare.
- 4: Capillary comprising a 6mm diameter brazed fitting allowing an EX "e" box outlet via a cable gland with a 6mm passage. The part of the capillary located inside the EX "e" housing is protected against the risks of electrical contact by a PTFE sheath, and the external part by a flexible metal sheath in stainless steel. The 6mm dia. end of the stainless- steel protective sheath is rounded to avoid shearing of the capillary, and the 6mm diameter allows the mounting of accessories such as flange or thermowell (Patented). This is the capillary protection recommended for thermostats with EX "e" box.



A: Shaft dia. 6mm, length 10mm, for use with printed knobs and bezels, or small plastic arrow knob (available as accessories below);







F: Fixed and sealed temperature adjustment

General rules for installation:

Important note: These thermostats are intended to monitor or control temperatures in gas or dust hazardous areas. They can be installed in a variety of enclosures, and they can be explosion-proof enclosures, increased safety models, flameproof models, etc., or non explosion-proof enclosures, as long as they comply with the requirements of IP54 and above, and do not damage the integrity of "db" and "tb" based on the requirements of IEC 60079-0. However, we recommend that the electrical connection at the end of the cable be made in an EX "e" box. For gas hazardous areas, this equipment is approved as "Ex db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5/ T6; For dust hazardous areas, this equipment is approved as "Ex tb", suitable for use in zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group. The applicable ambient temperature of the equipment is: NC: 16(4)A NO: 10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +50°C (T6/T80°C) NC: 16(4)A NO: 10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +80°C (T5/T95°C) NC: 25(4)A NO: 15(2)A, 125/250 VAC; 50/60 Hz; -60°C to +50°C (T5/T95°C) The outlet of the capillary from this box must be carried out by a cable gland with a gasket adapted to the 6mm diameter of the capillary connection fitting and providing the degree of protection required by the standard. The models with screw driver adjustment and front mounting allow incorporation inside most existing junction boxes having inside a free height of 60mm minimum. With an adjustment per 10mm shaft and printed knob, this minimum height is about 70mm. We recommend checking this height by requesting plans for the devices with the knob of your choice. Approvals: These thermostats are certified: ATEX: TÜV 22 ATEX 8892 X; IECEx: IECEX TUR 22. 0057 X. CCC: 2025012304765427 Housing: Aluminum, 86 x 40 x 56mm (Dimensions without shaft and knob) Bulb and capillary: Stainless steel. Standard capillary length 1500mm. (Other lengths available with M.O.Q) Capillary minimum bending radius 5mm. Temperature sensing element: Oil or liquid metalloids filled bulb and capillary. Electrical connection: Silicone insulated wire H05S-K, 2.5mm², T180°C, 450V, standard length 1000mm. Wire ends with crimped terminals. Other lengths on request. Ground terminals: One M4 grounding terminals with saddle is located on the cable exit side. Mounting: Front bracket with 2 x M4 threads, 28mm distance, or backside by two M4 screws with 60mm distance Contacts: SPDT, snap action contact. Electrical life 100,000 cycles. Electrical rating: Suitable for power control, remote control of relay coils or PLCs circuits.

Voltage	Maximum rating (A) between:					
Voltage	Common (white) and normally closed (black)	Common (white) and normally open (red)				
400V AC	16 (4)	10(2)				
250V AC	25 (4)	15(2)				
125V AC	25 (4)	15(2)				



Explosion proof bulb and capillary thermostats for incorporation



These devices use silver contacts or silver alloy contacts. Due to the possible oxidation of the contacts in time, we do not recommend the use of AC or DC low-voltage circuits (24V or less) if the switched intensity is less than 100mA, or the switched power less than 800mW. Contact us for those applications that require gold-plated contacts. The electrical ratings given are normalized resistive circuit values.

Options:

- Capillary sleeved with 6mm diameter stainless steel flexible tube

- Capillary with fitting for 6mm cable gland gasket, with or without capillary sleeving in stainless steel **Mechanical life:** > 500,000 cycles

Classification: Gas: 🐵 II 2G Ex db IIC T5/T6 Gb Dust: 🐵 II 2D Ex tb IIIC T95°C/T80°C Db

Main references with 1000mm cable length (L1)**

References with screw driver with arrow adjustment shaft	References with 10mm adjustment shaft	Temperature range	Capillary length (L2, mm)	Bulb diameter (D, mm)	Bulb length (L3, mm)	Differential (°C)	Max temperature on bulb
KABC-35035L1A3	KABA-35035L1A3	-35~35°C (-31~95°F)	1500	6	100	3.5±1	60°C (140°F)
KABC-10040L2A3	KABA-10040L2A3	-10~40°C (-14~104°F)	1500	6	130	2.5±1	70°C (158°F)
KABC-20050L3A3	KABA-20050L3A3	-20~50°C (-4~122°F) *	1500	6	90	3.5±1	80°C (176°F)
KABC004040L4A3	KABA004040L4A3	4~40°C (39.2~104°F)	1500	6	140	2±1	70°C (158°F)
KABC004040L5A3	KABA004040L5A3	4~40°C (39.2~104°F)	1500	8	80	2±1	70°C (158°F)
KABC000060L6A3	KABA000060L6A3	0~60°C (32~140°F)	1500	6	115	3±1	90°C (194°F)
KABC030090L7A3	KABA030090L7A3	30~90°C (86~194°F)	1500	6	110	3±1	120°C (248°F)
KABC000100L8A3	KABA000100L8A3	0~100°C (32~212°F)	1500	6	80	5±1.5	130°C (266°F)
KABC030110L9A3	KABA030110L9A3	30~110°C (86~ 230°F)	1500	4	120	7.5±2.5	230°C (446°F)
KABC000200LAA3	KABA000200LAA3	0~200°C (32~392°F)	1500	4	100	10±3	230°C (446°F)
KABC050200LBA3	KABA050200LBA3	50~200°C (122~392°F)	1500	4	120	7.5±2.5	230°C (446°F)
KABC000300LCA3	KABA000300LCA3	0~300°C (32~570°F)	1500	4	70	15±5	330°C (626°F)
KABC050300LDA3	KABA050300LDA3	50~300°C (122~572°F)	1500	4	80	12±4	330°C (626°F)
KABC050400LEA3	KABA050400LEA3	50~400°C (122~752°F)	1500	4	50	18±6	430°C (806°F)
KABC060500LFA3	KABA060500LFA3	60~500°C (140~932°F)	1500	4	120	20±6°C	550°C (1000°F)

* The filling liquid of these thermostatic assemblies has a freezing temperature of about -50° C (-58°F). However it is important to protect the bulb and /or the capillary against the risk of freezing if a temperature below -35°C (-31°F) can be reached in operation. Acceptable storage temperature: -50°C(-58°F).


** For a longer wire, replace the 13th character (A) by B for 2m, C for 3m, D for 4m a.s.o.

Accessories (to be ordered separately)

Dia 40mm printed knob*	Bezel for 40mm knob*	Miniature arrow knob*	Pipe liner crossing flange	Bulb fixing profile on pipes
PRINTABLE AREA	042mm 7mm 28mm 04.5mm (x4) 28mm 047mm	1.2mm 9mm 9mm 10.5mm 010mm 8.5mm 8.5mm 010mm 4.6mm	2mm Ø5.5mm(x4) 25mm 35mm Ø6.1mm 25.4mm	22mm 13mm 116mm 160mm 137mm
This knob is printed according to the temperature range of the thermostat. Available in °C or °F. It is used when the thermostat is mounted from the front, with the adjustment shaft passing through the mounting board.	Allows the positioning of the temperature mark on the knob.	To be mounted on the thermostat when it is fixed from the rear in an enclosure. Its size is greater than the arrow used with screwdriver adjustment.	This flange makes it possible to pass through the protective metal sheath located around the thermal insulation of the pipes, without risk of breaking the capillary. It is tightened by a bicone on the 6mm dia. end of the stainless-steel sheathing of the capillary	This profile makes it possible to securely fix with two clamps a thermostat bulb in contact with the wall of a pipe
66MZ	66EN1	66MQ	66KAMB35356	6YTPF160032
* Many other knobs and bezel This cable output cannot be use			n 16A and 25A.	





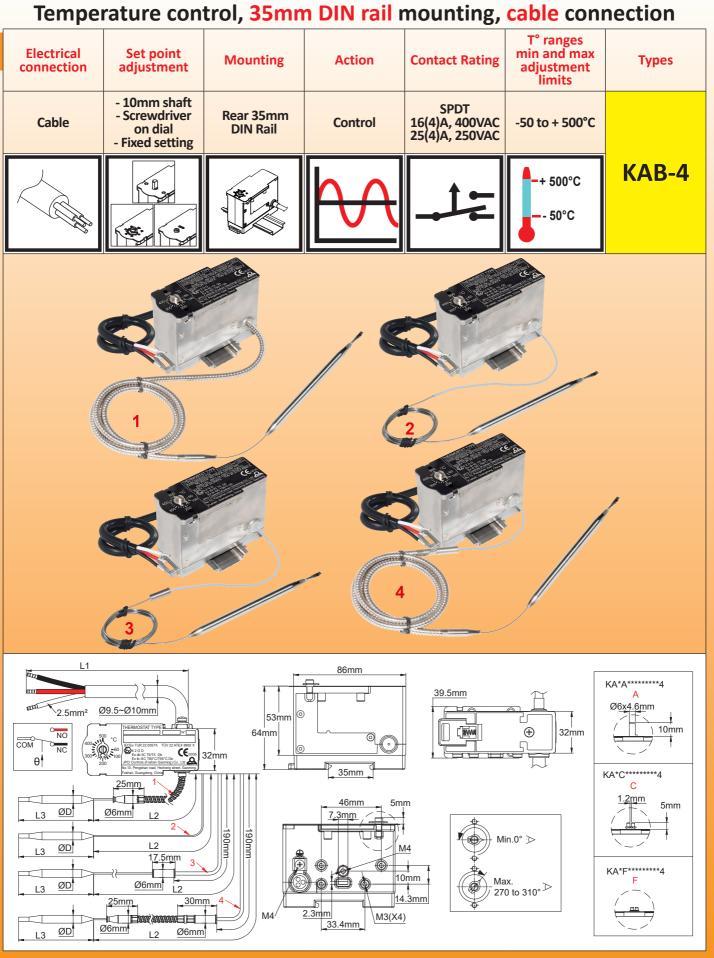



Types of capillary outputs

- 1: Capillary protected by a flexible stainless steel metal sheath over its entire length, right out of the thermostat body. The 6mm dia. end of the stainless-steel protective sheath is rounded to avoid shearing of the capillary, and the 6mm diameter allows the mounting of accessories such as flange or thermowell (Patented). This is the capillary protection recommended for thermostats with cable connection.
- 2: Bare 1mm capillary without any protection.
- 3: Capillary comprising a 6mm diameter brazed fitting allowing an EX "e" box outlet via a cable gland with a 6mm passage. The part of the capillary located inside the EX "e" box is protected against the risks of electrical contact by a PTFE sheath, and the external part is bare.
- 4: Capillary comprising a 6mm diameter brazed fitting allowing an EX "e" box outlet via a cable gland with a 6mm passage. The part of the capillary located inside the EX "e" housing is protected against the risks of electrical contact by a PTFE sheath, and the external part by a flexible metal sheath in stainless steel. The 6mm dia. end of the stainless- steel protective sheath is rounded to avoid shearing of the capillary, and the 6mm diameter allows the mounting of accessories such as flange or thermowell (Patented). This is the capillary protection recommended for thermostats with EX "e" box.



A: Shaft dia. 6mm, length 10mm, for use with printed knobs and bezels, or small plastic arrow knob (available as accessories below);



C: Screw driver type, with arrow and printed aluminum dial, for use in PPS Ex-e enclosure of JPCI or other suppliers for heat tracing;



F: Fixed and sealed temperature adjustment

General rules for installation:

Important note: These thermostats are intended to monitor or control temperatures in gas or dust hazardous areas. They can be installed in a variety of enclosures, and they can be explosion-proof enclosures, increased safety models, flameproof models, etc., or <u>non explosion-proof enclosures</u>, as long as they comply with the requirements of IP54 and above, and do not damage the integrity of "db" and "tb" based on the requirements of IEC 60079-0. However, we recommend that the electrical connection at the end of the cable be made in an EX "e" box. For gas hazardous areas, this equipment is approved as "Ex db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5/T6; For dust hazardous areas, this equipment is approved as "Ex tb", suitable for use in zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group. The applicable ambient temperature of the equipment is: NC: 16(4)A NO: 10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +50°C (T6/T80°C) NC: 16(4)A NO: 10(2)A, 125/250/400 VAC; 50/60 Hz; -60°C to +80°C (T5/T95°C) NC: 25(4)A NO: 15(2)A, 125/250 VAC; 50/60 Hz; -60°C to +50°C (T5/T95°C) The outlet of the capillary from this box must be carried out by a cable gland with a gasket adapted to the 6mm diameter of the capillary connection fitting and providing the degree of protection required by the standard. The models with screw driver adjustment and front mounting allow incorporation inside most existing junction boxes in having inside a free height of 65mm minimum above the DIN rail. With an adjustment per 10mm shaft and printed knob, this minimum height is about 75mm. We recommend checking this height by requesting plans for the devices with the knob of your choice. Approvals: These thermostats are certified: ATEX: TÜV 22 ATEX 8892 X; IECEx: IECEx TUR 22. 0057 X. CCC: 2025012304765427 Housing: Aluminum, 86 x 40 x 64mm (Dimensions without shaft and knob) Bulb and capillary: Stainless steel. Standard capillary length 1500mm. (Other lengths available with M.O.Q) Capillary minimum bending radius 5mm. **Temperature sensing element:** Oil or liquid metalloids filled bulb and capillary. Electrical connection: Silicone insulated wires H05S-K, 2.5mm², T180°C, 450V, standard length 200mm. Wire ends with crimped terminals. Other lengths on request. Ground terminals: One M4 grounding terminals with saddle is located on the wire exit side. Mounting: Rear side, on symmetrical 35mm DIN rail Contacts: SPDT, snap action contact. Electrical life 100,000 cycles. Electrical rating: Suitable for power control, remote control of relay coils or PLCs circuits. Maximum rating (A) between: open (red)

voltage	Common (white) and normally closed (black)	Common (white) and normally o
400V AC	16 (4)	10(2)
250V AC	25 (4)	15(2)
125V AC	25 (4)	15(2)





These devices use silver contacts or silver alloy contacts. Due to the possible oxidation of the contacts in time, we do not recommend the use of AC or DC low-voltage circuits (24V or less) if the switched intensity is less than 100mA, or the switched power less than 800mW. Contact us for those applications that require gold-plated contacts. The electrical ratings given are normalized resistive circuit values.

Options: - Capillary sleeved with 6mm diameter stainless steel flexible tube

- Capillary with fitting for 6mm cable gland gasket, with or without capillary sleeving in stainless steel Mechanical life: > 500,000 cycles **Classification:**

Gas: 🐵II 2G Ex db IIC T5/T6 Gb Dust: 🐵II 2D Ex tb IIIC T95°C/T80°C Db

Main references with 1000mm cable length (L1) and capillary output type 4**

References with screw driver with arrow adjustment shaft	References with 10mm adjustment shaft	Temperature range	Capillary length (L2, mm)	Bulb diameter (D, mm)	Bulb length (L3, mm)	Differential (°C)	Max temperature on bulb
KABC-35035L1A4	KABA-35035L1A4	-35~35°C (-31~95°F)	1500	6	100	3.5±1	60°C (140°F)
KABC-10040L2A4	KABA-10040L2A4	-10~40°C (-14~104°F)	1500	6	130	2.5±1	70°C (158°F)
KABC-20050L3A4	KABA-20050L3A4	-20~50°C (-4~122°F) *	1500	6	90	3.5±1	80°C (176°F)
KABC004040L4A4	KABA004040L4A4	4~40°C (39.2~104°F)	1500	6	140	2±1	70°C (158°F)
KABC004040L5A4	KABA004040L5A4	4~40°C (39.2~104°F)	1500	8	80	2±1	70°C (158°F)
KABC000060L6A4	KABA000060L6A4	0~60°C (32~140°F)	1500	6	115	3±1	90°C (194°F)
KABC030090L7A4	KABA030090L7A4	30~90°C (86~194°F)	1500	6	110	3±1	120°C (248°F)
KABC000100L8A4	KABA000100L8A4	0~100°C (32~212°F)	1500	6	80	5±1.5	130°C (266°F)
KABC030110L9A4	KABA030110L9A4	30~110°C (86~230°F)	1500	4	120	7.5±2.5	230°C (446°F)
KABC000200LAA4	KABA000200LAA4	0~200°C (32~392°F)	1500	4	100	10±3	230°C (446°F)
KABC050200LBA4	KABA050200LBA4	50~200°C (122~392°F)	1500	4	120	7.5±2.5	230°C (446°F)
KABC000300LCA4	KABA000300LCA4	0~300°C (32~570°F)	1500	4	70	15±5	330°C (626°F)
KABC050300LDA4	KABA050300LDA4	50~300°C (122~572°F)	1500	4	80	12±4	330°C (626°F)
KABC050400LEA4	KABA050400LEA4	50~400°C (122~752°F)	1500	4	50	18±6	430°C (806°F)
KABC060500LFA4	KABA060500LFA4	60~500°C (140~932°F)	1500	4	120	20±6°C	550°C (1000°F)

* The filling liquid of these thermostatic assemblies has a freezing temperature of about -50° C (-58°F). However it is important to protect the bulb and /or the capillary against the risk of freezing if a temperature below -35°C (-31°F) can be reached in operation. Acceptable storage temperature: -50°C(-58°F).

** For a longer wire, replace the 13th character (A) by B for 2m, C for 3m, D for 4m a.s.o. For a type 1 capillary outlet: Replace the 11th character (L) with G; For a type 2 capillary outlet: Replace the 11th character (L) with C; For a type 3 capillary outlet: Replace the 11th character (L) with P;

Accessories (to be ordered separately)

Dia 40mm printed knob*	Bezel for 40mm knob*	Miniature arrow knob*	Pipe liner crossing flange	Bulb fixing profile on pipes
				
PRINTABLE AREA	28mm 28mm 28mm 28mm 28mm 28mm 28mm 28mm	12mm 9mm 9mm 8.5mm 8.5mm 10.5mm 010mm 4.6mm	2mm Ø5.5mm(x4) 25mm 25mm 25mm 35mm 25mm 35mm	22000 13200 1100m 1600m 137mm
This knob is printed according to the temperature range of the thermostat. Available in °C or °F. It is used when the thermostat is mounted from the front, with the adjustment shaft passing through the mounting board.	Allows the positioning of the temperature mark on the knob.	To be mounted on the thermostat when it is fixed from the rear in an enclosure. Its size is greater than the arrow used with screwdriver adjustment.	This flange makes it possible to pass through the protective metal sheath located around the thermal insulation of the pipes, without risk of breaking the capillary. It is tightened by a bicone on the 6mm dia. end of the stainless-steel sheathing of the capillary	This profile makes it possible to securely fix with two clamps a thermostat bulb in contact with the wall of a pipe
66MZ	66EN1	66MQ	66KAMB35356	6YTPF160032

Many other knobs and bezels are described in our catalogue N°1


This cable output cannot be used with cable length more than 2m for ratings between 16A and 25A.

Section 6 Thermostats and limiters, connection inside EX « e », IP65, housing with built-in connection block

Contact us

Cat4-3-6-1



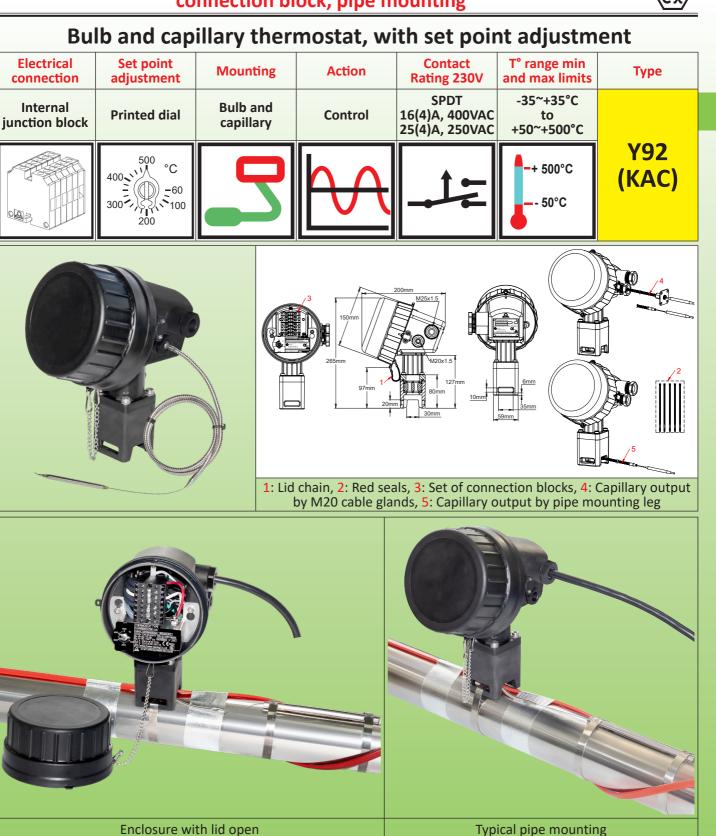


General rules for installation:

Important Note: These bulb and capillary thermostats are intended to monitor or control temperatures in gas or dust hazardous areas, by being mounted on pipes, in particular for electrical tracing applications. **PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas. For gas hazardous areas**, this equipment is approved as "Ex-eb db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification **T6**; **For dust hazardous areas**, this equipment is approved as "Ex-tb", suitable for use in zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), with ambient temperature limits on its body from -60°C to +70°C. The thermostat, box and terminal block assembly is an inseparable unit.

Contact us

www.ultimheat.com



Ambient temperature on the enclosure may also be limited by the maximum ambient temperature allowed on the temperature sensing element (See the parts numbers table). **Approvals:** These thermostats are certified:

ATEX: TÜV 22ATEX 8893 X; IECEX: TUR 22.0058X;

CCCEx: pending

Housing: In addition to the rigorous testing required by explosion-proof equipment standards, the enclosure material was selected to provide the following environmental resistance:

- Neutral salt spray (NSS): 1008-hour tests according to DIN EN ISO9227 (corrosion tests in artificial atmospheres), the longest duration.

- UV exposure: tests according to UL746C Table 25.1 and ISO 4892

Enclosure diameter 150mm, maximum depth 200mm. It also includes a 125mm PPS foot allowing offset mounting on pipes. Waterproof class IP66. Shock resistance greater than IK10.

Lid: Unscrews in a ¼ turn, with lock. The lid also includes a stainless-steel anti-fall chain and two sealing holes. The lid automatically locks in the closed position. It can be unlocked simply with a small flat screwdriver.

Temperature sensing element: Liquid expansion bulb and capillary based on hydrocarbon oils or liquid metalloids. The capillary is protected by a corrugated flexible stainless-steel sheath.

Adjustment: By dial graduated in °C (°F on request). Access to the adjustment is only possible after removing the cover and turning off the power.

Electrical connection: On internal terminal block for conductors from 0.5mm² to 4mm², or from 1 to 6mm² tightening by screw. There are two ground terminals on the terminal block and one on the thermostat body. See common configurations table below.

Identification: Unalterable anodized aluminum plate, riveted, fixed to the rear side.

Cable glands: An M20 cable gland and an M25 cable gland are incorporated as standard on the right side. Up to 2 tapped holes for 16, 20 or 25mm cable glands are possible on the opposite side. The foot includes a special cable gland that can accommodate up to two flat heating cables and a diastat capillary with a 6mm diameter wall penetration fitting. Tightening the foot cable gland is secured by 4 stainless steel M6 locking screws.

Assembly: On pipes, by hose clamp (10x35mm passage allowing two clamps side by side).

Maximum temperature supported by the pipe mounting foot: 220°C

Contacts: SPDT (snap action contact)

Electrical rating: Suitable for power control, remote control of relay coils or PLCs circuits, and direct power switching.

Voltage	Max rating (A)	Switch Electrical life (cycles)
400VAC	16	100000
250VAC	25	100000
125VAC	25	100000

These devices use silver contacts or silver alloy contacts. Due to the possible oxidation of the contacts in time, we do not recommend the use of AC or DC low-voltage circuits (24V or less) if the switched intensity is less than 100mA, or the switched power less than 800mW. Contact us for those applications that require gold-plated contacts. The electrical ratings given are normalized resistive circuit values.

Mechanical life: > 500.000 cycles

Options:


- These enclosures can receive thermostats with sealed fixed setting (Type Y92KAF). See pages of thermostats without enclosure for more information.


- Leg with cable gland for special sized heating cables.

Gas classification: 🚯 II 2G Ex eb db IIC T6 Gb

Dust classification: Dust classification: Dust classification: Dust classification:


Common terminal block configurations

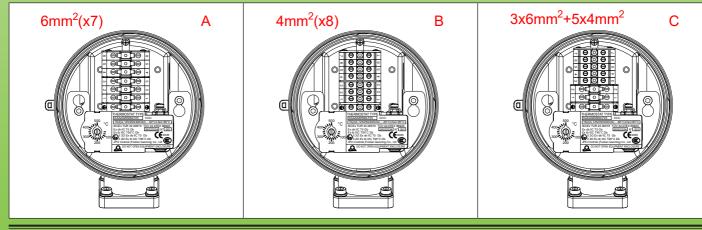

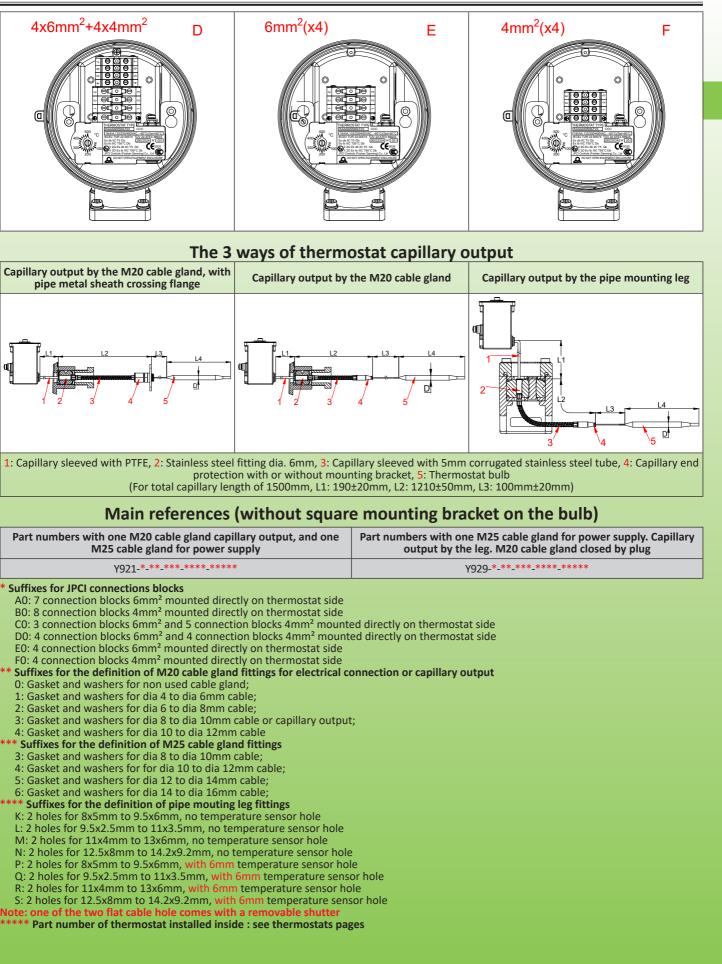

Contact us




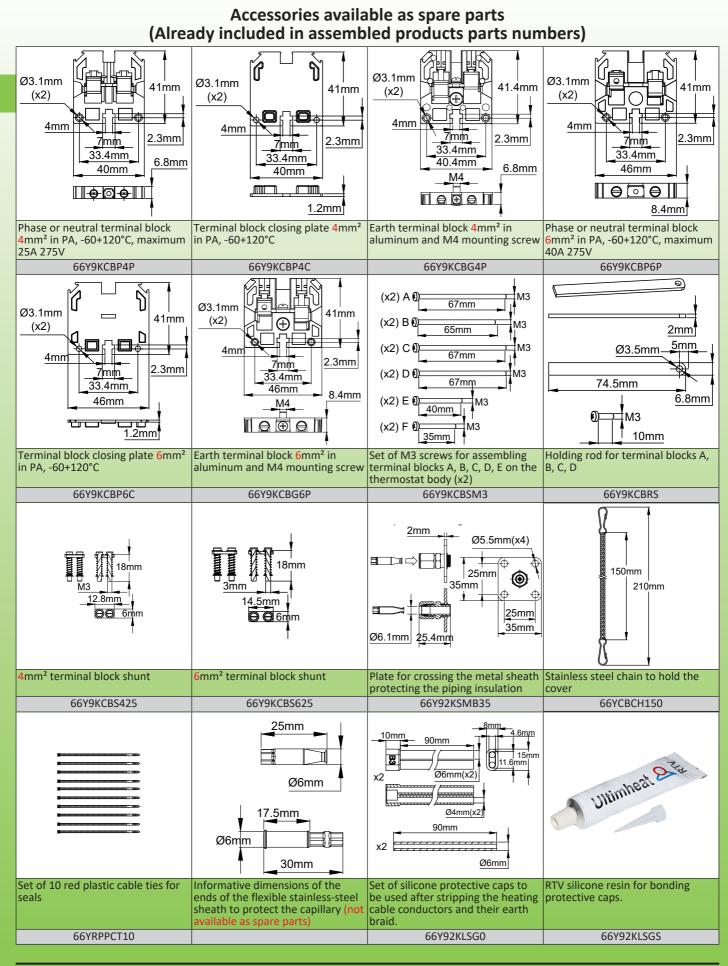

Cat4-<u>3-6-6</u>


Contact us

www.ultimheat.com

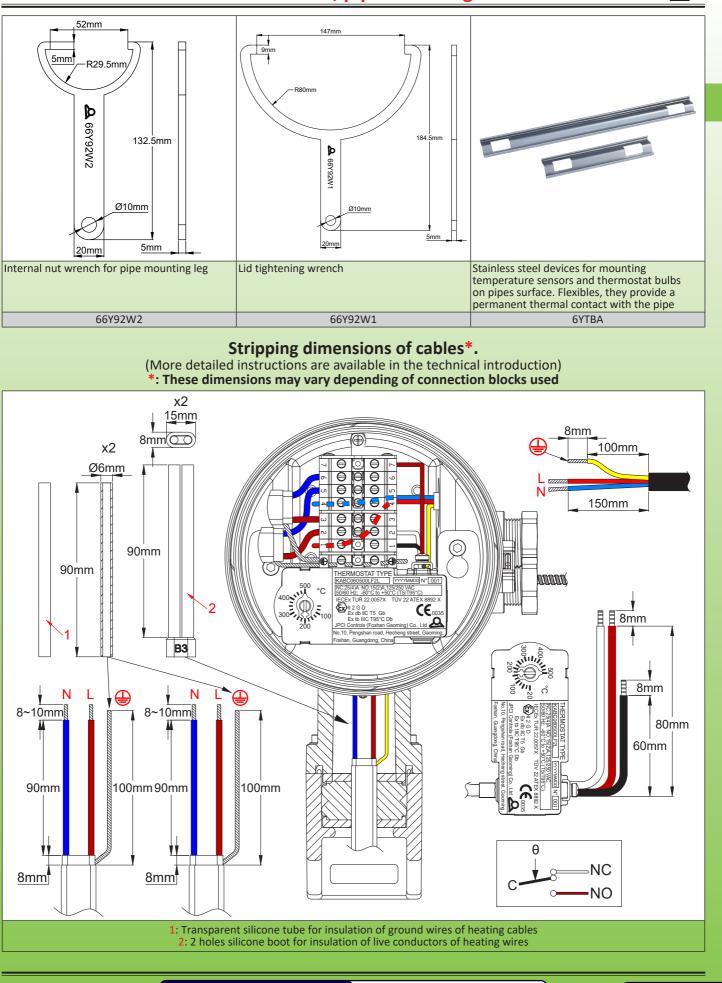

Contact us



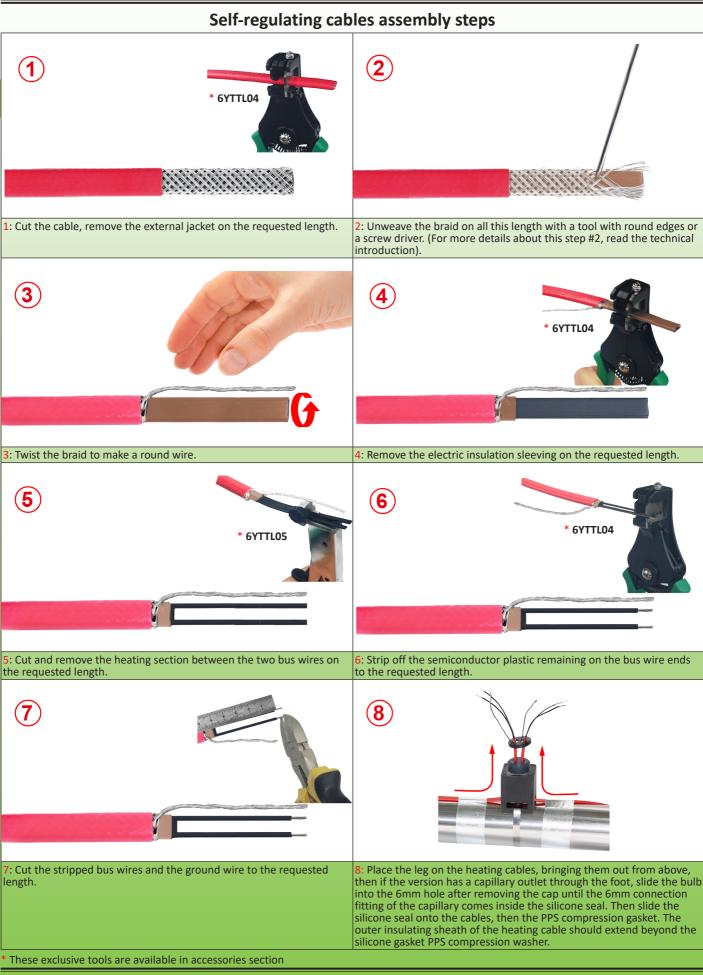

Contact us



Contact us

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice



Section 7 EX "e" connection boxes in **PPS for self-regulating heating** cables and standard cables. Standard screw terminals or insulation piercing terminals. Connection in potentially explosive industrial environments. For non-explosive environments, see catalog 12




Section 7 Technical introduction on connection boxes for potentially explosive environments

First part

Connection boxes for heat tracing cables, with screw terminals, for standard heating cables, self-regulating cables and standard power supply cables. Connections in industrial hazardous environments. For industrial non-hazardous environments see catalogue 12

The unrivaled advantages of Ultimheat self-regulating or traditional heating cable connection boxes

(Compatible with power supply traditional round cables, constant power heating cables, flat self-regulating cables with polypropylene, silicone semiconductor, or fluorinatated compound cores)

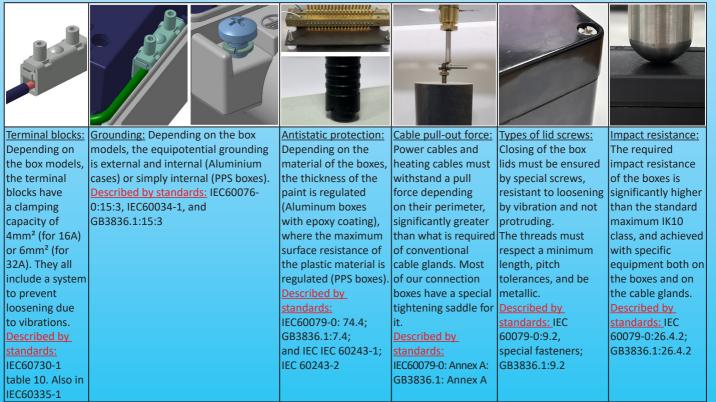

6 essential requirements on all EX-e enclosures

And numerous other mandatory rules apply to the connections for insulation, tracking and surface distances depending of material and degree of pollution, temperature resistance, etc. As for every requirement of standards, everything is designed accordingly and carefully checked and tested in our own UL and CE recognized laboratory



Explosion proof connection boxes




Second part

Connection boxes for heat tracing cables, with insulation piercing terminals, for self-regulating cables and standard power supply cables. Connections in industrial hazardous environments. For industrial non-hazardous environments see catalogue 12

The unrivaled advantages of Ultimheat insulation piercing self-regulating heating cable connection boxes

(Compatible with self-regulating cables with polypropylene, silicone semiconductor, or fluorinatated cores)

Insulation piercing terminals 5 technical improvements

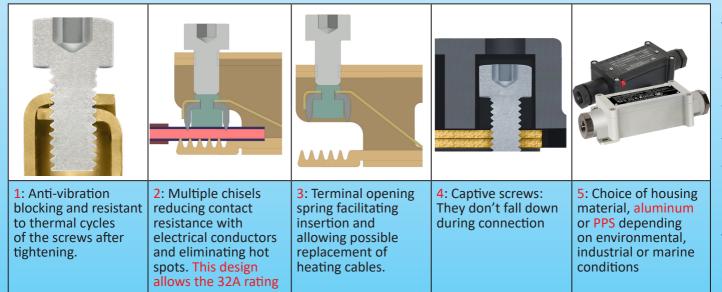

Connection on "cold" conductors 5 technical improvements

1	2	3	4	5
1: Anti-vibration blocking of the terminal block screws, resistant to thermal cycles.	2: Terminals allow flexible stranded or rigid conductors from 1 to 6mm ² , stripped or not.	3: Large insertion hole for conductors up to 6mm ² , with guide ramps. No tortuous circuit to make to these conductors.	4: Ground terminal for conductors up to 6mm ² , with anti- vibration screws tightening and protection blade	5: Captive screws: They don't fall down during connection

Cat4-3-7-4

Contact us

www.ultimheat.com

Explosion proof connection boxes



Installation 3 technical improvements





1: Two built-in tabs for mounting on a flat wall.

2: Two removable legs for fitting on pipes, providing a 10 mm offset from the tube. Ideal and economical for applications with low insulation thickness and pipe temperature below 100°C. Clamping on metal or PVC piping can be made by nylon tie or metal clamp (These tabs are included as standard).



3: One stainless steel bracket, for offset mounting on piping, allowing the enclosure to be locked in after the insulation and its protection have been installed. Allow an insulation thickness of 50 mm, and can be used on hot pipes. Clamping on metal or PVC piping by nylon tie or metal clamp. (Legs available as an accessory.)

Lids 4 technical improvements

	The second secon		C 10 20 30
1: Four captive stainless- steel screws tightening on metal inserts. <u>No screwing</u> into the plastic, no fragile hinges.	2: Riveted identification label, anodized aluminum, laser printed, weatherproof and tamperproof.	3: Two tabs for red safety seals allow the tamperproof sealing of the lid and a second set of two tabs allow to install a chain	4: Graduated scale in cm, engraved <u>, with</u> <u>mechanical stop at 0 cm</u> , to ease the stripping length measurement.

to hold the lid




Explosion proof connection boxes



Cable glands 5 technical improvements					
1: Specially designed to comply with the high tear force requested by industrial and hazardous area standards, the built- in cable glands are made of aluminium or black PPS, UV resistant. They are IP67 and IP69K, therefore they withstand immersion and high-pressure hot water washing.	2: Thanks to two springs, the locking saddle for round or flat cable maintains the earth continuity of the metal braid in the event of deformation of the cable, and connection to the equipotential ground line (Patented).	3: This locking saddle provides a powerful tightening of the cable which is independent of the tightening torque of the gland nut, avoiding any tearing.	4: Captive saddle screws.	5: A whole range of gaskets in 70 shore silicone and in 70 shore NBR makes it possible to cover all the dimensions of round or flat cables.	

EX « e » thermostats and connection boxes in PPS, IP65

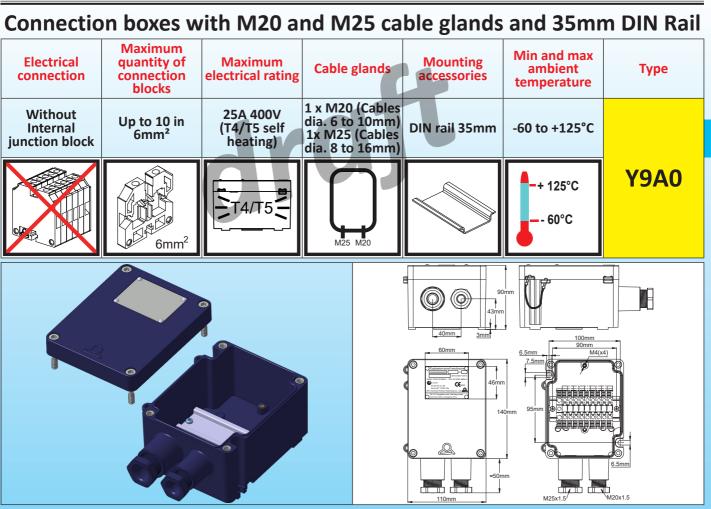

General rules for installation:

Important note: These connection boxes are intended to be used in gas or dust hazardous areas.

For gas hazardous areas, this enclosure is approved as "Ex-eb" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5; For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust

group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C. Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEx TUR 22. 0059 X; CCCEx: pending Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards).

Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals.

Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: One M20 and one M25 cable gland are included as standard (see the coding for the selection of seals). **Mounting:** Wall-mounted, with two 6.5mm diameter holes, center distance 100x95mm.

Terminal blocks: Up to 10 4mm² or 6mm² Exe terminal blocks can be snapped onto the DIN rail.

Optional accessories:

- A mounting plate for rail-free mounting of JPCI 4mm² or 6mm² Atex terminal blocks. **Gas classification:** ©II 2G Ex eb IIC T4/T5 Gb

Dust classification: 😔 II 2D Ex tb IIIC T125°C / T95°C Db

Part Number

Y9A000-*-**

* Suffixes for the definition of M20 cable gland fittings 0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 10 to dia 12mm cable


** Suffixes for the definition of M25 cable gland fittings
0: Gasket and washers for on used cable gland; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable; A: Gasket and washers for flat cable 9.5x2.5mm to 11x3.5mm; B: Gasket and washers for flat cable 9.5x2.5mm to 11x3.5mm; B: Gasket and washers for flat cable 9.5x2.5mm to 11x3.5mm; B: Gasket and washers for flat cable 11x4mm to 13x6mm; D: Gasket and washers for flat cable 12.5x8mm to 14.2x9.2mm.
See to the last section of this catalogue for existing accessories

Contact us



(Ex

Connection boxes with one M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, capillary output on bottom side

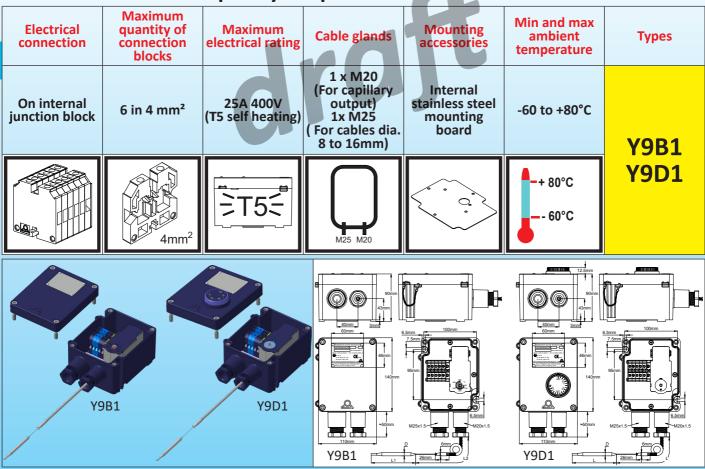

General rules for installation: Important note: These thermostats enclosures, compatibles with our thermostats types KA, KY and KZ, are intended to monitor or control ambient to resource and the second second second second second second second second second to monitor or control ambient temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-eb db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5;

For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C. Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEx TUR 22. 0059 X; CCCEx: pending Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards).

Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals. 2 Versions are available: for internal thermostat adjustment or with outside knob set point setting. Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: One M20 cable gland for capillary output and one M25 cable gland for power connection are included as standard (see the coding for the selection of seals).

Mounting: Wall-mounted, with two 6.5mm diameter holes, center distance 100x95mm.

Terminal blocks: Six 4mm² terminals blocks. Including one ground terminal, 2 neutral terminals and 3 live terminals Gas classification: 🐼 II 2G Ex eb db IIC T5 Gb

Dust classification: 😔 II 2D Ex tb IIIC T95°C Db

Main references

Internal adjustment	Y9B1602-**-***
Outside knob adjustment	Y9D1602-**-***
	•


** Suffixes for the definition of M25 cable gland fittings

3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable;

*** Part number of thermostat installed inside : see thermostats pages



Connection boxes with two M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, capillary output on lateral side

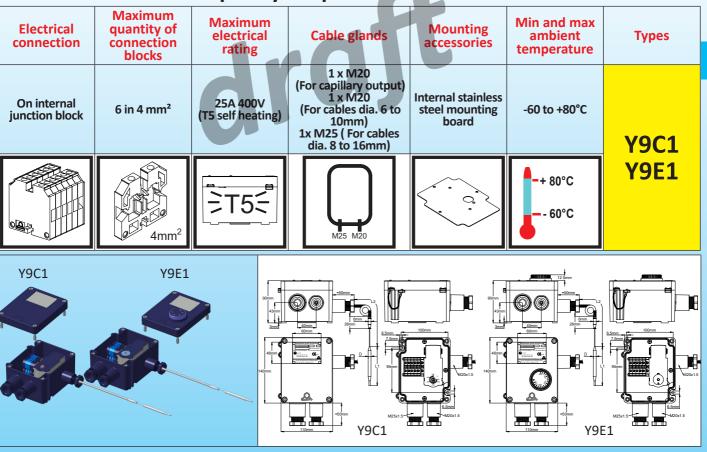

General rules for installation:

Important note: These thermostats enclosures, compatibles with our thermostats types KA, KY and KZ, are intended to monitor or control ambient temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-eb db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5;

For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C.

Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEx: TUR 22. 0059 X; CCCEx: pending

Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards).

Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals. 2 Versions are available: for internal thermostat adjustment or with outside knob set point setting.

Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: One M20 cable gland for capillary output, one M20 cable gland for power connection, and one M25 cable gland for power connection are included as standard (see the coding for the selection of seals).

Mounting: Wall-mounted, with two 6.5mm diameter holes, center distance 100x95mm. **Terminal blocks:** Six 4mm² terminals blocks. Including one ground terminal, 2 neutral terminals and 3 live terminals

Gas classification: 😔 II 2G Ex eb db IIC T5 Gb

Dust classification: 🐼 II 2D Ex tb IIIC T95°C Db

Main references

Internal adjustment	Y9C1602-*-***
Outside knob adjustment	Y9E1602-*-**-

Suffixes for the definition of M20 cable gland fittings for electrical connection

0: Gasket and washers for non used cable gland; 1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 10 to dia 12mm cable

** Suffixes for the definition of M25 cable gland fittings


*** Part number of thermostat installed inside : see thermostats pages

Contact us

 $\langle \epsilon_x \rangle^2$

^{3:} Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable;

Connection boxes with two M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, capillary output on lateral side, ambient temperature bulb

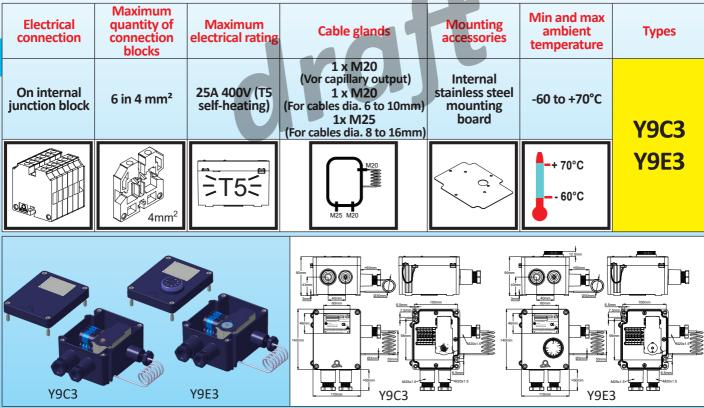

General rules for installation: Important note: These thermostats enclosures, compatibles with our thermostats types KA, KY and KZ, are intended to monitor or control ambient temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-eb db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5.

For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C. Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEx TUR 22. 0059 X; CCCEx: pending Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards). They allow the mounting on the side of coiled bulbs for ambient temperature measurement **Cover:** Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals. 2 Versions are available: for internal thermostat adjustment or with outside knob set point setting

Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: One M20 cable gland for capillary output, one M20 cable gland for power connection, and one M25 cable gland for power connection are included as standard (see the coding for the selection of seals). Mounting: Wall-mounted, with two 6.5mm diameter holes, center distance 100x95mm.

Terminal blocks: Six 4mm² terminals blocks. Including one ground terminal, 2 neutral terminals and 3 live terminals Gas classification: 🐼 II 2G Ex eb db IIC T5 Gb

Dust classification: Gold 2D Ex to IIIC T95°C Db

Main references


Internal adjustment	Y9C3602-*-**-***
Outside knob adjustment	Y9E3602-*-**-***

* Suffixes for the definition of M20 cable gland fittings for electrical connection

0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 10 to dia 12mm cable ** Suffixes for the definition of M25 cable gland fittings

3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable; *** Part number of thermostat installed inside : see thermostats pages

Connection boxes with two M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, temperature sensing by backside rod without fins

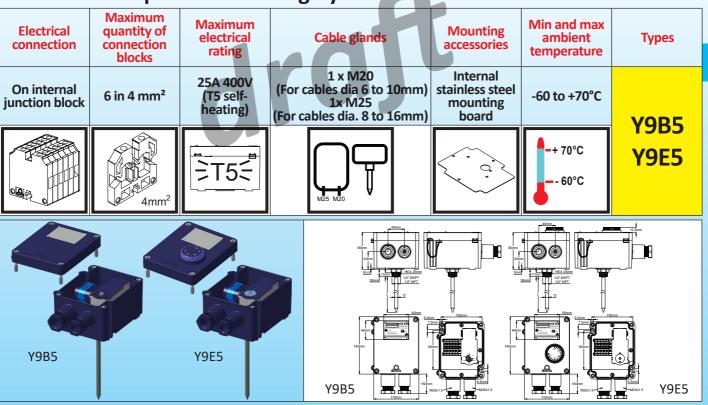

General rules for installation: Important note: These thermostats enclosures, compatibles with our thermostats types KA, KY and KZ, are intended to monitor or control ambient temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-eb db" and is suitable for use in zone 1 and zone 2, gas

group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5. For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C. Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEX TUR 22. 0059 X; CCCEx: pending Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards). They allow the mounting on the bottom, of direct temperature sensing rods, for liquids temperature measurement up to 95°C

Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals. 2 Versions are available; for internal thermostat adjustment or with outside knob set point setting

Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: One M20 cable gland for power connection, and one M25 cable gland for power connection are included as standard (see the coding for the selection of seals).

Mounting: By the thread on the rod fitting.

Terminal blocks: Six 4mm² terminals blocks. Including one ground terminal, 2 neutral terminals and 3 live terminals Gas classification: ©II 2G Ex eb db IIC T5 Gb

Dust classification: 🐼 II 2D Ex tb IIIC T95°C Db

Main references

Internal adjustment	Y9B560-*-**-***-***
Outside knob adjustment	Y9E560-*-**-***-***

* Suffixes for the definition of M20 cable gland fittings for electrical connection 0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm

cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 10 to dia 12mm cable

** Suffixes for the definition of M25 cable gland fittings

3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable;


*** Length of the rod under the fitting, measured in mm

**** Part number of thermostat installed inside : see thermostats pages

Contact us

 $\langle \xi_{\rm X} \rangle^2$

Connection boxes with two M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, temperature sensing by backside rod with fins

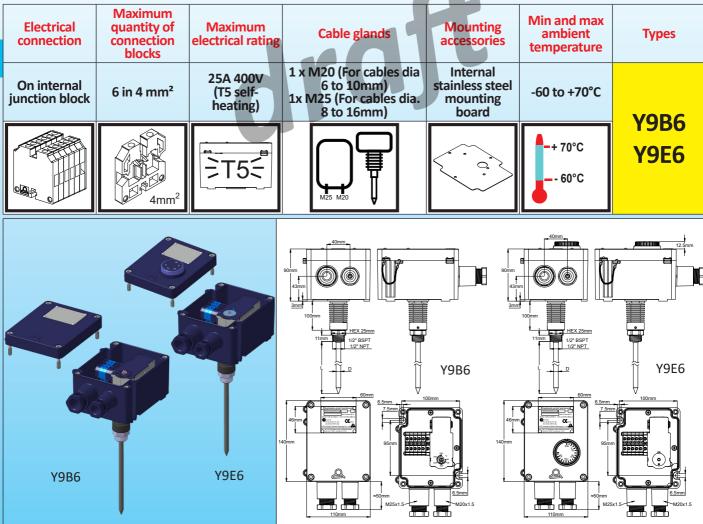

General rules for installation: Important note: These thermostats enclosures, compatibles with our thermostats types KA, KY and KZ, are intended to monitor or control ambient temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-eb db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5.

For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C. Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEx TUR 22. 0059 X; CCCEx: pending Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards). They allow the mounting on the bottom, of direct temperature sensing rods, for liquids or gas temperature measurement up to 300°C

Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals. 2 Versions are available: for internal thermostat adjustment or with outside knob set point setting. Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: One M20 cable for power connection, and one M25 cable gland for power connection are included as standard (see the coding for the selection of seals).

Mounting: By the thread on the rod fitting.

Terminal blocks: Six 4mm² terminals blocks. Including one ground terminal, 2 neutral terminals and 3 live terminals Gas classification: Il 2G Ex eb db IIC T5 Gb

Dust classification: 😔 II 2D Ex tb IIIC T95°C Db

Cat4-3-7-12

EX « e » thermostats and connection boxes in PPS, IP65



Main references

Internal adjustment	Y9B660-*-**-****
Outside knob adjustment	Y9E660-*-**-***

* Suffixes for the definition of M20 cable gland fittings for electrical connection

0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 10 to dia 12mm cable

* Suffixes for the definition of M25 cable gland fittings


3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable;

*** Length of the rod under the fitting, measured in mm

**** Part number of thermostat installed inside : see thermostats pages



Large connection boxes with M20 and M25 cable glands and 35mm **DIN Rail**

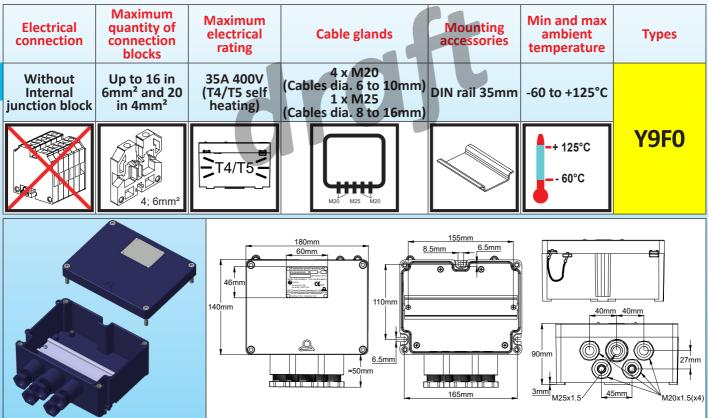

General rules for installation: Important note: These connection boxes are intended to be used in gas or dust hazardous areas.

For gas hazardous areas, this enclosure is approved as "Ex-eb" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5;

For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C. **Important note:** PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEX TUR 22. 0059 X; CCCEx: pending Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards).

Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals.

Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: Four M20 and one M25 cable gland are included as standard (see the coding for the selection of seals). Mounting: Wall-mounted, with three 6.5mm holes

Terminal blocks: Up to 20 in 4mm² or 16 in 6mm² Exe terminal blocks can be snapped onto the DIN rail. **Optional accessories:**

A mounting plate for rail-free mounting of JPCI 4mm² or 6mm² Atex terminal blocks.

Gas classification: 🐼 II 2G Ex eb IIC T4/T5 Gb

Dust classification: Soll 2D Ex to IIIC T125°C/T95°C Db

Part Number

Y9F000-*-**

* Suffixes for the definition of the four M20 cable gland fittings (identical for the 4)

0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 10 to dia 12mm cable ** Suffixes for the definition of M25 cable gland fittings


0: Gasket and washers for non used cable gland; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable; A: Gasket and washers for flat cable 9.5x2.5mm to 11x3.5mm; B: Gasket and washers for flat cable 9.5x2.5mm to 11x3.5mm; C: Gasket and washers for flat cable 11x4mm to 13x6mm; D: Gasket and washers for flat cable 12.5x8mm to 14.2x9.2mm.

See to the last section of this catalogue for existing accessories

Contact us



Large connection boxes with four M20 and one M25 cable glands and two bulb and capillary thermostats with internal or external adjustment.

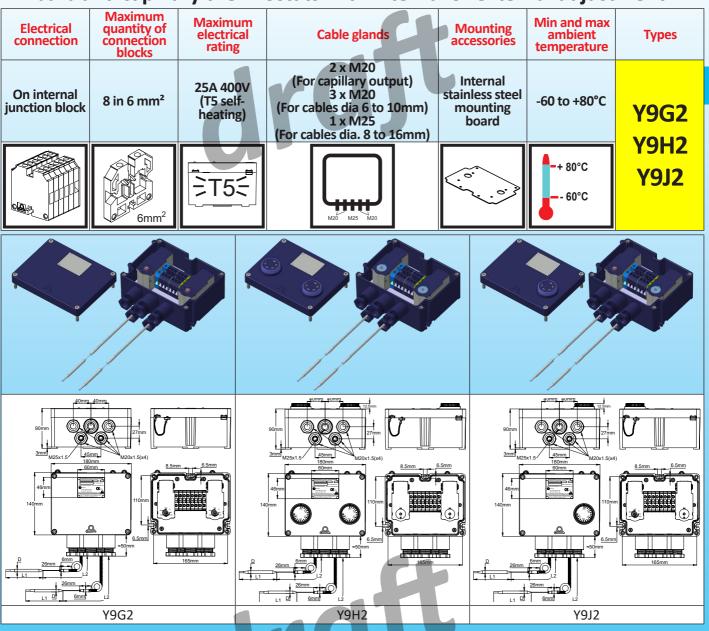

General rules for installation: Important note: These thermostats enclosures, compatibles with our thermostats types KA, KY and KZ, are intended to monitor or control ambient temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-eb-db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5; For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is

IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C. Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEx TUR 22. 0059 X; CCCEx: pending Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards).

Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals. There are three versions: with internal adjustment of both thermostats, with an external adjustment knob for each models or two different models.

Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: Two M20 cable gland for capillaries output, two M20 cable gland for power connection and one M25 cable gland for power connection are included as standard (see the coding for the selection of seals).

 $\langle E_x \rangle$



Mounting: Wall-mounted, with three 6.5mm diameter holes. Terminal blocks: 8x 6mm² terminals blocks. Including one ground terminal, 1 neutral terminal and 6 live terminals Gas classification: 🕢 I 2G Ex eb db IIC T5 Gb Dust classification: II 2D Ex tb IIIC T95°C Db



	_		
Two internal adjustment		Y9G20	8-*-**-***
Two outside knob adjustments		Y9H20	8-*-**-***
One inside adjustment and one outside adjustment		Y9J20	3-*-**

* Suffixes for the definition of the two M20 cable gland fittings for electrical connection (M20 cable glands for capillaries output have 6mm dia. fittings)

0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 10 to dia 12mm cable

** Suffixes for the definition of M25 cable gland fittings


3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable;

- Part number of the two thermostats installed : see thermostats pages



EX « e » thermostats and connection boxes in PPS, IP65

Large connection boxes with four M20 and one M25 cable glands and two coiled bulb room thermostats with internal or external adjustment.

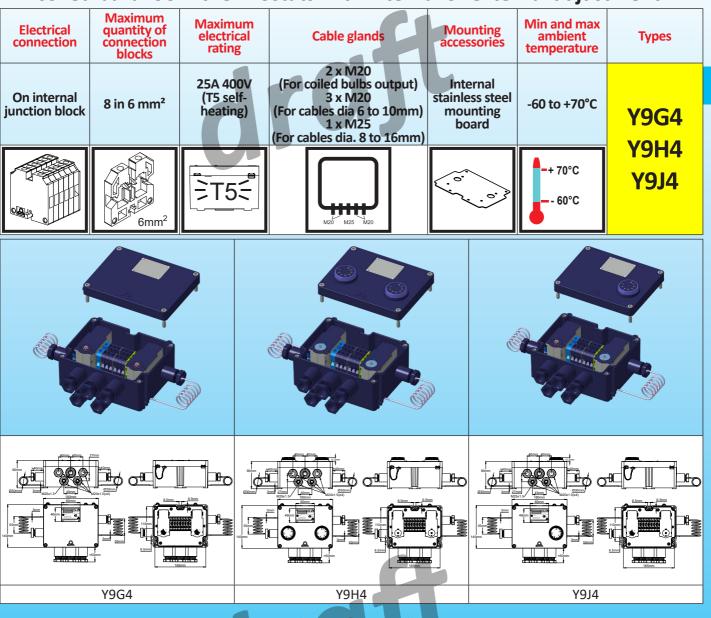

General rules for installation: Important note: These thermostats enclosures, compatibles with our thermostats types KA, KY and KZ, are intended to monitor or control ambient temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-eb-db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5;

For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C.

Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEx TUR 22. 0059 X; CCCEx: pending Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards).

Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals. There are three versions: with internal adjustment of both thermostats, with an external adjustment knob for each thermostat, or with one internal adjustment and one adjustment by external knob. The thermostats can be two identical

Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: Two M20 cable gland for coiled bulbs output, two M20 cable gland for power connection and one M25 cable gland for power connection are included as standard (see the coding for the selection of seals).

Contact us

www.ultimheat.com


(Ex



Mounting: Wall-mounted, with three 6.5mm diameter holes.

Terminal blocks: 8x 6mm² terminals blocks. Including one ground terminal, 1 neutral terminal and 6 live terminals. **Gas classification:** 🖗 II 2G Ex eb db IIC T5 Gb

Dust classification: 🖾 II 2D Ex tb IIIC T95°C Db




* Suffixes for the definition of the two M20 cable gland fittings for electrical connection (M20 cable glands for bulbs output have 6mm dia. fittings) 0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 10 to dia 12mm cable ** Suffixes for the definition of M25 cable gland fittings

3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable;

- Part number of the two thermostats installed : see thermostats pages



Connection boxes with two M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, temperature sensing by backside rod without fins

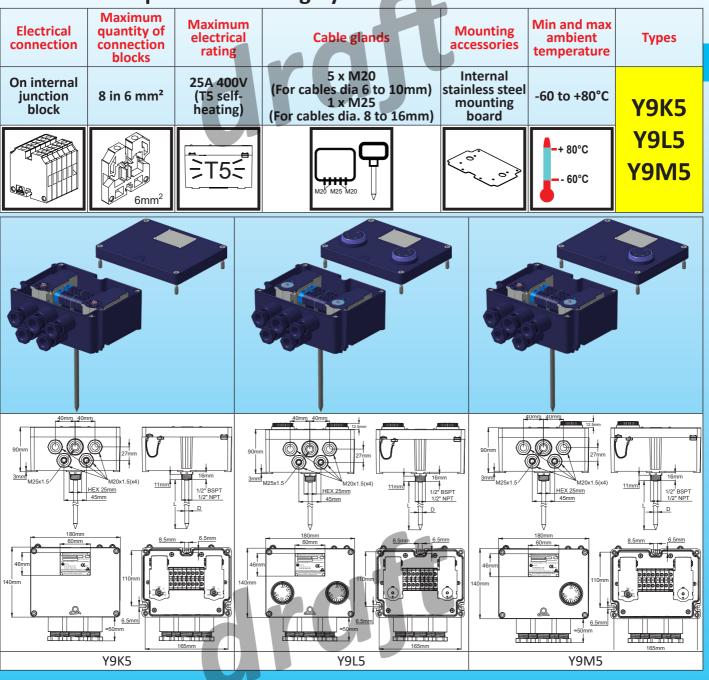

General rules for installation:

Important note: These thermostats enclosures, compatibles with our thermostats types KA, KY and KZ, are intended to monitor or control ambient temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-eb-db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5;

For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C.

Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X; IECEx: IECEx TUR 22. 0059 X; CCCEx: pending **Housing:** UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards). **They allow the mounting on the bottom, of direct temperature sensing rods, for liquids temperature measurement up to 95°C**

Contact us

www.ultimheat.com

Cat4-3-7-19

 $\langle E_x \rangle^2$



Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals. There are three versions: with internal adjustment of both thermostats, with an external adjustment knob for each thermostat, or with one internal adjustment and one adjustment by external knob. The thermostats can be two identical models or two different models.

Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: Two M20 cable gland for coiled bulbs output, two M20 cable gland for power connection and one M25 cable gland for power connection are included as standard (see the coding for the selection of seals).

Mounting: By means of the fitting existing on the rod

Terminal blocks: 8x 6mm² terminals blocks. Including one ground terminal, 1 neutral terminal and 6 live terminals Gas classification: 🐼 II 2G Ex eb db IIC T5 Gb

Dust classification: 😔 II 2D Ex tb IIIC T95°C Db

Main references

Two internal adjustment	Y9K508-*-**-***
Two outside knob adjustments	Y9L508-*-**-***-***
One inside adjustment and one outside adjustment	Y9M508-*-**-***-****

* Suffixes for the definition of the two M20 cable gland fittings for electrical connection (M20 cable glands for bulbs output have 6mm dia. fittings)

0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 10 to dia 12mm cable

Suffixes for the definition of M25 cable gland fittings


3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable;

*** Length of the rod under the fitting, measured in mm

** Part number of the two thermostats installed : see thermostats pages



Connection boxes with two M20 and one M25 cable glands and one bulb and capillary thermostat with internal or external adjustment, temperature sensing by backside rod with fins

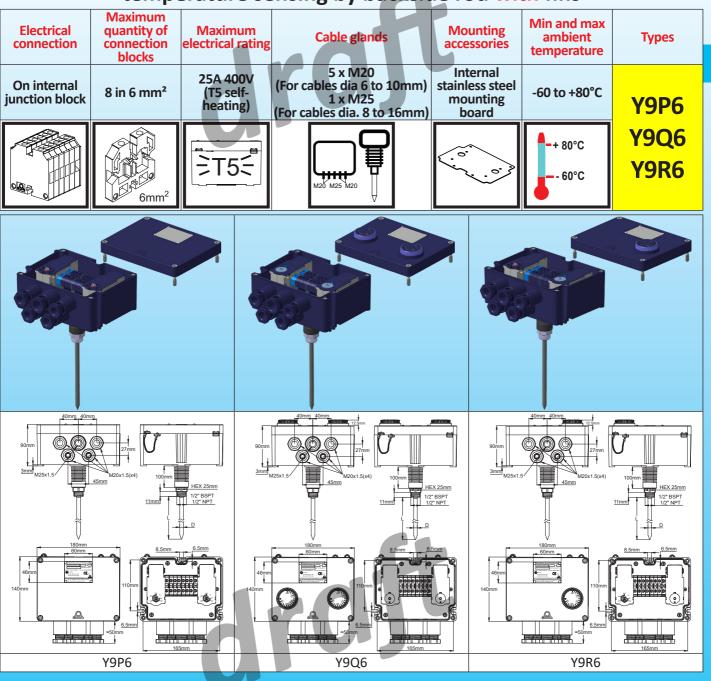

General rules for installation: Important note: These thermostats enclosures, compatibles with our thermostats types KA, KY and KZ, are intended to monitor or control ambient temperatures in gas or dust hazardous areas.

For gas hazardous areas, this equipment is approved as "Ex-eb-db" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5;

For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), maximum allowed equipment temperature 95°C.

Important note: PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including

Approvals: These enclosures are certified: Atex: TÜV 22 ATEX 8894 X: IECEx: IECEx TUR 22, 0059 X: CCCEx: pending Housing: UV-resistant PPS (according to UL746C Table 25.1). Excellent salt spray resistance: >1008h according to DIN EN ISO9227 (the highest resistance class). IP65 waterproof rating. Impact resistance greater than IK10 (Compliant with Atex standards). They allow the mounting on the bottom, of direct temperature sensing rods, for gas or liquids temperature measurement up to 300°C

Contact us

www.ultimheat.com

Cat4-3-7-21

 $\langle E_{x} \rangle$



Cover: Mounting with four captive stainless steel screws. The cover also includes a stainless steel anti-fall chain and two holes for seals. There are three versions: with internal adjustment of both thermostats, with an external adjustment knob for each thermostat, or with one internal adjustment and one adjustment by external knob. The thermostats can be two identical models or two different models.

Identification: Anodized aluminum or riveted stainless steel plate, fixed to the cover.

Cable glands: Two M20 cable gland for coiled bulbs output, two M20 cable gland for power connection and one M25 cable gland for power connection are included as standard (see the coding for the selection of seals).

Mounting: By means of the fitting existing on the rod

Terminal blocks: 8x 6mm² terminals blocks. Including one ground terminal, 1 neutral terminal and 6 live terminals

Gas classification: 🐼 II 2G Ex eb db IIC T5 Gb

Dust classification: 🐼 II 2D Ex tb IIIC T95°C Db

Main references

Two internal adjustment	Y9P608-*-**-***-***
Two outside knob adjustments	Y9Q608-*-**-***-***
One inside adjustment and one outside adjustment	Y9R608-*-**-***-****

* Suffixes for the definition of the two M20 cable gland fittings for electrical connection (M20 cable glands for bulbs output have 6mm dia. fittings)

0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for dia 12mm cable


** Suffixes for the definition of M25 cable gland fittings

3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable;

*** Length of the rod under the fitting, measured in mm

****-**** Part number of the two thermostats installed : see thermostats pages



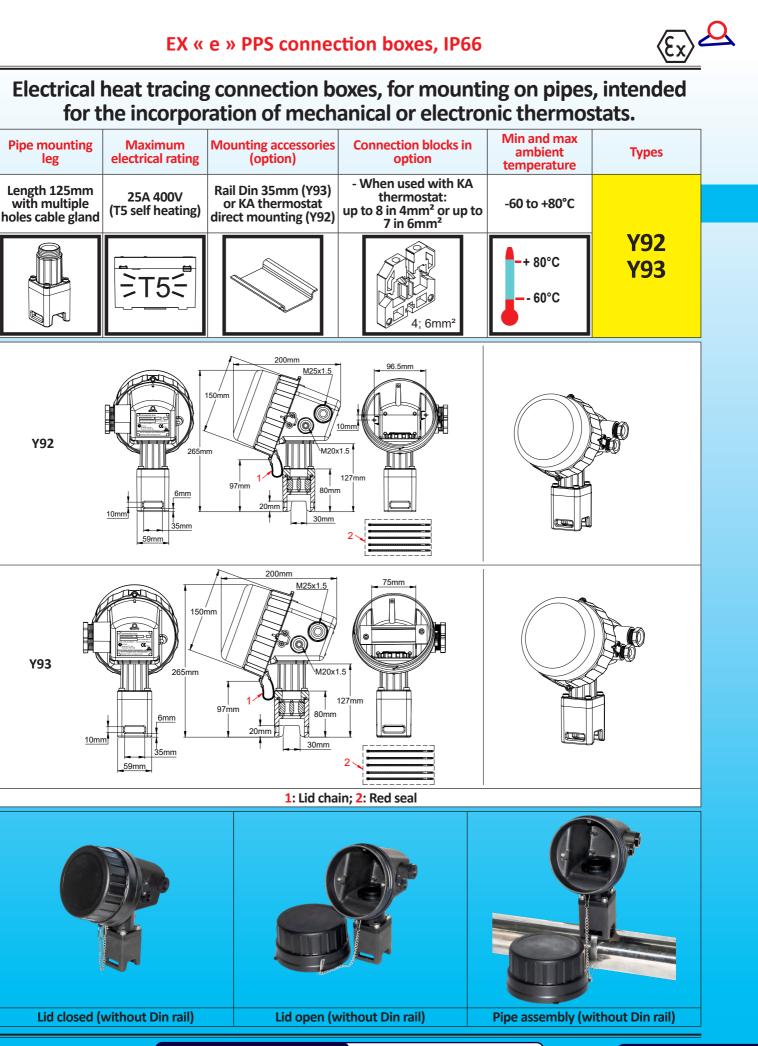

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

www.ultimheat.com





General rules for installation:

Important note: These connection boxes are intended to monitor or control ambient temperatures in gas or dust hazardous areas. PPS enclosure and stainless-steel accessories allow their use in industrial or marine environments, including in cold polar areas

For gas hazardous areas, this equipment is approved as "Ex-eb" and is suitable for use in zone 1 and zone 2, gas group IIC (Hydrogen/Acetylene, the highest protection group), with a temperature classification T5.

For dust hazardous areas, this equipment is approved as "Ex-tb", suitable for use in, zone 21 and zone 22, the dust group is IIIC (electric conductive dust, the highest protection group), with ambient temperature limits on its body from -60°C to +80°C.

Main use: These enclosures have been engineered for use with flat self-temperature controlled heating cables and mounted on pipes.

Approvals: These enclosures are certified: ATEX: TÜV 22 ATEX 8894 X; IECEx: IECEx TUR 22. 0059 X; CCCEx: pending

Housing: UV-resistant PPS, diameter 150mm, maximum depth 200mm. The box also includes a 125mm long PPS foot allowing offset mounting on pipes. Waterproof class IP66. Shock resistance greater than IK10.

Lid: Unscrews in ¼ turn, with lock. The lid also includes a stainless-steel anti-fall chain and two holes for seals. The lid automatically locks in the closed position. It can be unlocked simply with a small flat screwdriver.

Identification: Riveted anodized aluminum plate, fixed to the rear wall.

Cable glands: An M20 cable gland and an M25 cable gland are incorporated as standard on the right side. Up to 2 tapped holes for 16, 20 or 25mm cable glands are possible on the opposite side. The leg includes a special cable gland that can accommodate up to two flat heating cables of 6.2 x 13.2mm and a diastat capillary with a 6mm diameter wall penetration fitting. Tightening of the cable gland is made with 4 M6 stainless steel locking screws.

Mounting: On pipes, by hose clamp (10 x 35mm passage).

Maximum temperature supported by the pipe mounting foot: 220°C

Optional accessories:

- Å 35mm DIN rail, useful width 90mm can be mounted on the two holes with 96.5mm distance.

- A stainless steel plate for mounting of 4mm² and 6mm² ATEX connection blocks made by JPCI.
- A stainless steel plate for mounting KA series explosion-proof thermostats
- Foot gland packing for special sized heating cables.

Explosive gas class: Il 2G Ex eb IIC T5 Gb

Explosive dust class: Il 2D Ex tb IIIC T95°C Db

Main references

Without Din rail, without connection blocks	Y92900-*-**-***
With Din rail, without connection blocks	Y93900-*-**-***

* Suffixes for the definition of M20 cable gland fittings for electrical connection or capillary output

0: Gasket and washers for non used cable gland;1: Gasket and washers for dia 4 to dia 6mm cable; 2: Gasket and washers for dia 6 to dia 8mm cable; 3: Gasket and washers for dia 8 to dia 10mm cable or capillary output; 4: Gasket and washers for dia 10 to dia 12mm cable


****** Suffixes for the definition of M25 cable gland fittings

- 3: Gasket and washers for dia 8 to dia 10mm cable; 4: Gasket and washers for for dia 10 to dia 12mm cable; 5: Gasket and washers for dia 12 to dia 14mm cable; 6: Gasket and washers for dia 14 to dia 16mm cable;
- *** Suffixes for the definition of pipe mouting leg fittings
 - K: 2 holes for 8x5mm to 9.5x6mm, no temperature sensor hole
 - L: 2 holes for 9.5x2.5mm to 11x3.5mm, no temperature sensor hole
 - M: 2 holes for 11x4mm to 13x6mm, no temperature sensor hole
 - N: 2 holes for 12.5x8mm to 14.2x9.2mm, no temperature sensor hole
 - P: 2 holes for 8x5mm to 9.5x6mm, with 6mm temperature sensor hole
 - Q: 2 holes for 9.5x2.5mm to 11x3.5mm, with 6mm temperature sensor hole
 - R: 2 holes for 11x4mm to 13x6mm, with 6mm temperature sensor hole
 - S: 2 holes for 12.5x8mm to 14.2x9.2mm, with 6mm temperature sensor hole
- Note: one of the two flat cable hole comes with a removable shutter **** Part number of thermostat installed inside : see thermostats pages

Other cable glands configurations are possible. Part numbers on request.


Accessories



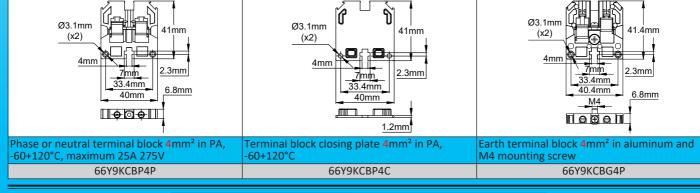

Contact us

EX « e » PPS connection boxes, IP66

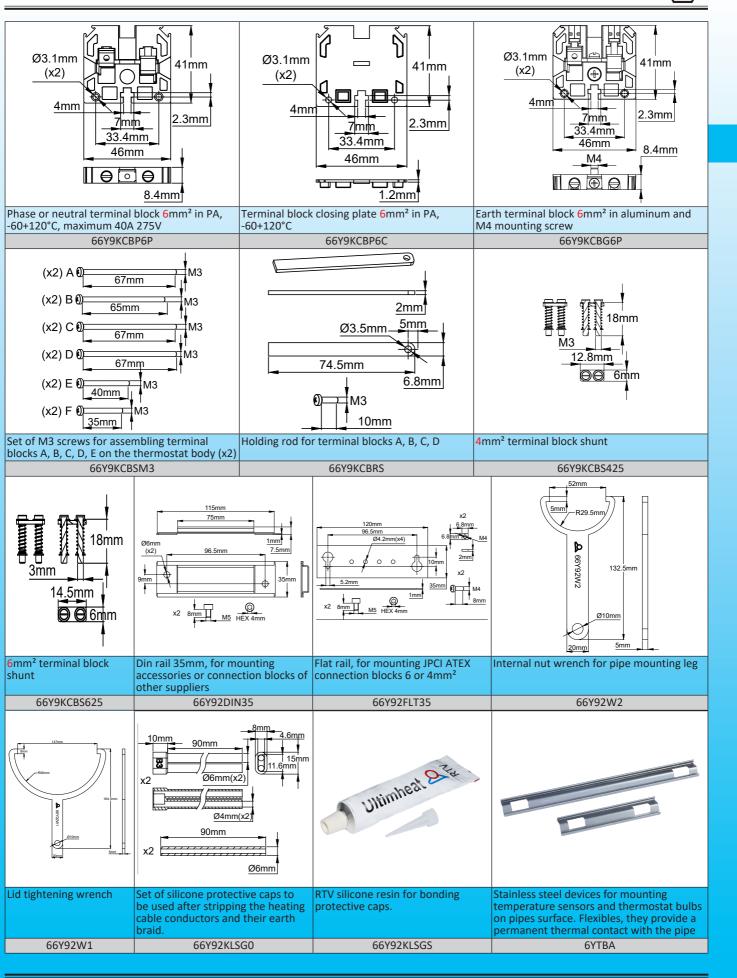


Contact us

www.ultimheat.com





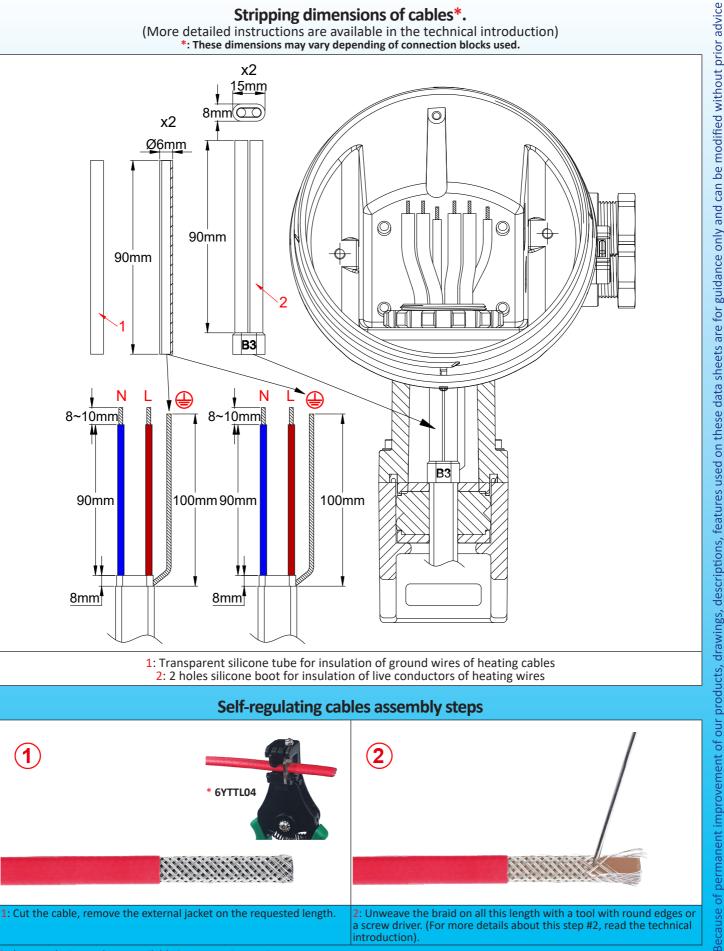


* These exclusive tools are available in accessories section

1

Contact us

EX « e » PPS connection boxes, IP66

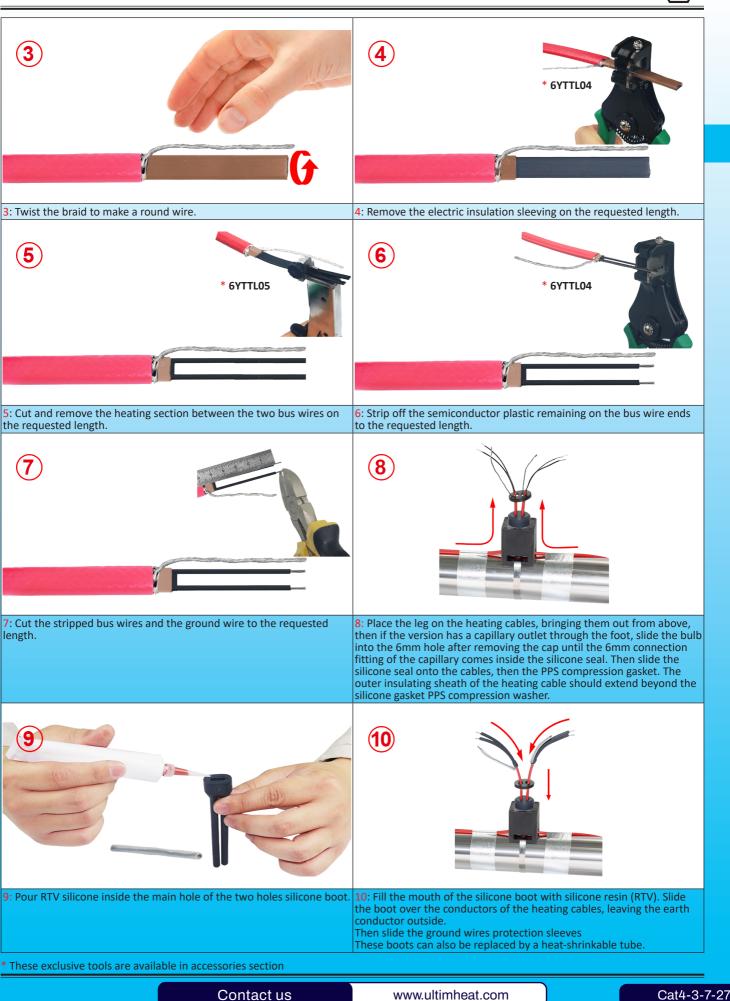

www.ultimheat.com

Cat4-3-7-27








* These exclusive tools are available in accessories section

Update 2025/04/17



Pressure screw-clamping IP67 waterproof PA66 termination caps (End seals) for closing the free end of oblong or round heating cables.

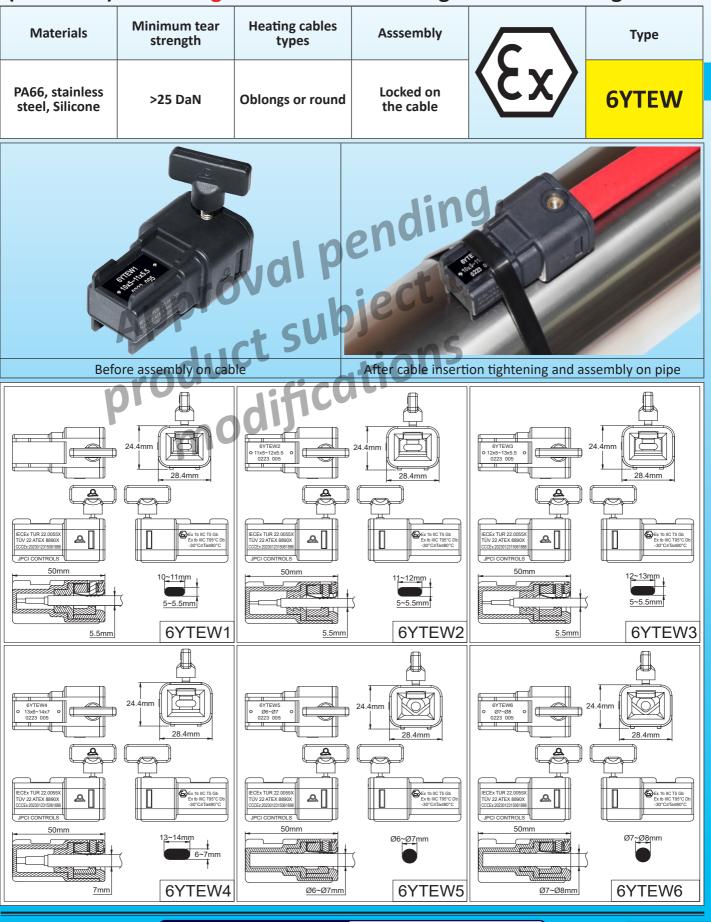

www.ultimheat.com

Cat4-3-7-29

Contact us



Applications

These cable ends are used to close quickly and without the need for gluing or filling with resin or the terminations of flexible self-regulating or constant power heating cables. They are instantly tightened and blocked on the cables without special tool or equipment.

Their tightening on the cable is made by a butterfly screw which will break at a preset torque. Unscrewing is then impossible. Once installed, they provide an IP67 seal at the end of the cable.

Their range of dimensions allows them to be used on most existing heat tracing heating cables <u>in industrial or</u> <u>explosive environments</u>. Their tear resistance is guaranteed regardless of the material of the outer sheath of the heating cable (Polyolefins, PVC, fluoroelastomers, FEP a.s.o.)

Main features

Body material: UV resistant PA66. (Internal seal is in silicone).

The wings of the body allow to move it away from the piping and improve its cooling. They also allow stable clamping on the piping by a cable tie. A notch prevents the cable tie from slipping

Maximum temperature resistance: +80°C. (For higher temperatures, see silicone cable end boots 6YTNJ with silicone resin filling).

Resistance at minimum temperature: -30°C (For lower temperatures, see the silicone cable end boots 6YTNJ with silicone resin filling).

Tear resistance: Greater than 25 DaN for all models.

This value is equal to or greater than required by standard EN60079-0 for cable terminations in explosive environments and higher than required by standard IEC 62395-1 for heating cables in industrial environment.

Options: Special dimensions possible, with minimum order of 1000 pieces.

Other models: In some cases, especially for constant power cables with a bus wires spacing of less than 5mm, it is necessary to use the version with silicone gel filling.

Warning: These products cannot be used on cables with an external metallic braid not covered by an outer jacket because in this case the waterproofing cannot be achieved. Then use terminations with silicone resin filling. (See types 6YTNJ at the end of this catalogue).

Classification for hazardous areas:

Gas: II 2G Ex eb IIC T5 Gb Dust: II 2D Ex tb IIIC T95°C Db **Certificates:**

ATEX: TÜV 22 ATEX 8895X IECEx: IECEx TUR 22.0060X CCCEx: 2023012315061886


Main part numbers

Part number*	Minimum cable size	Maximum cable size	Identification
6YTEW16S0F50100	10 x 5mm	11 x 5.5mm	W1
6YTEW26S0F50110	11 x 5mm	12 x 5.5mm	W2
6YTEW36S0F50120	12 x 5mm	13 x 5.5mm	W3
6YTEW46S0F60130	13 x 6mm	14 x 7mm	W4
6YTEW56S0R60000	Dia. 6mm	Dia. 7mm	W5
6YTEW66S0R70000	Dia. 7mm	Dia. 8mm	W6


* Types with silicone gel filling: Replace S0 by SG in the reference





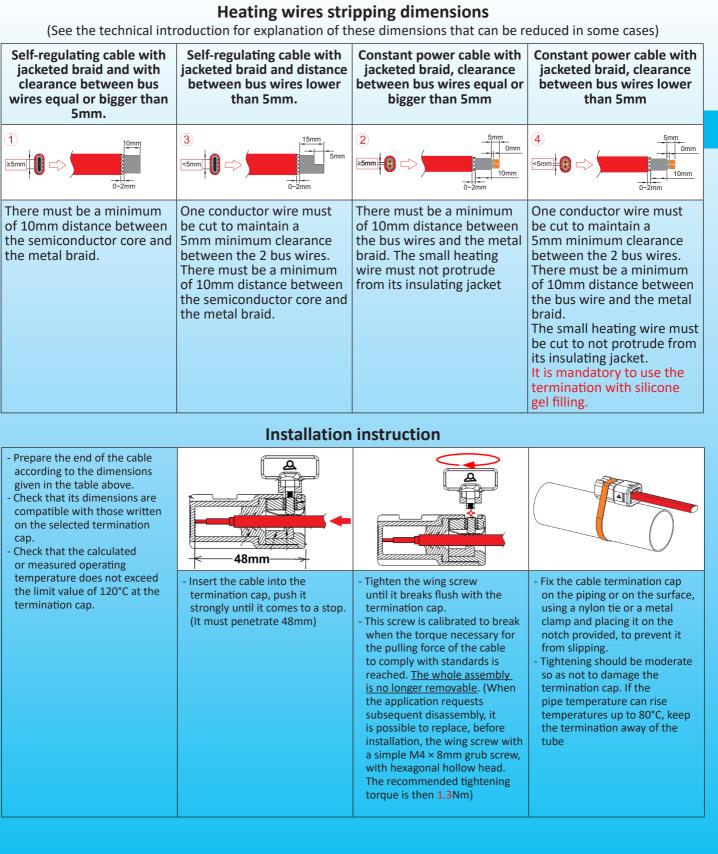

3 ways in T connection box in PPS for heat tracing cables, with screw terminals, for self-regulating cables or standard heating cables. 40Amps type

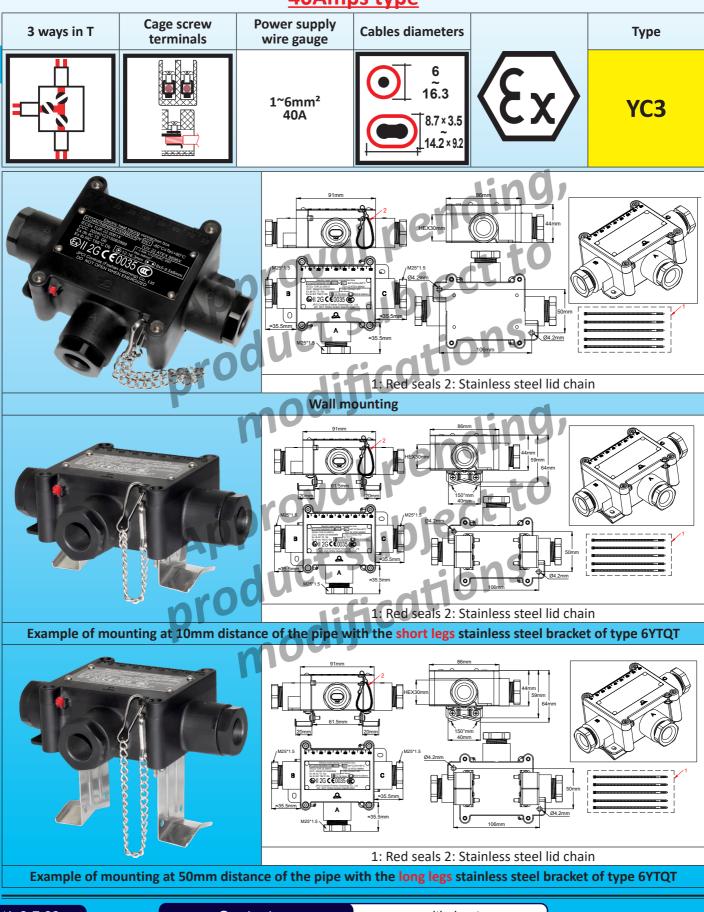






	Applications							
This box is used to con	nect a power supply cable to 2 self-regulating c	ables. It can be mounted flat on a surface, or						
on a pipe. The surface temperature of the tube must not allow the box to exceed its maximum permitted surface								
emperature.								
The terminal blocks are easily accessible and the connection is very simple, in particular for flat self-regulating cables vith metallic protective braid.								
Protection against gas								
🐵 II 2G Ex cb IIC T5 Gb								
Protection against due								
🗟 II 2D Ex tb IIIC T95°C								
Certificates:								
ATEX: ??								
IECEx: ??								
CCCEx: ??								
	Main to shuized footu							
	Main technical featu							
	1mm x 86mm x 44mm excluding cable glands. Su	iperior UV resistance.						
	P69K (hot high pressure washing).							
	highest, IK10 (excluding cable glands).							
Fixings:	Il manuating luce allow the manuating an a flat our	face Uples distance 112 v 45 mm						
	Il mounting lugs allow the mounting on a flat sur							
	<u>LOmm offset:</u> Two removable stainless steel legs ince from the tube limits the heating of the box.	allow mounting on a tube using a hylon tie of						
	<u>50mm offset:</u> Two removable stainless steel legs	allow the installation of a thermal insulation						
	pre screwing on the box and making electric con							
page on 6YTQW parts)		icetions (Available as accessories, see catalogue						
Terminal blocks:								
	of cage type with tightening by screw. Their desig	an protects them against loosening by vibration.						
	e conductors up to 6mm ² , or up to 40A maximu							
	his type of cable whose conductors are often of a							
strands which can be o	lamaged by clamping screw terminals with or wi	thout a protective blade.						
	ntion of the cable is ensured by an independent j							
	mper also ensures the grounding of the metal b							
	ower supply cables:_8; 12, 14 or 16.3mm depend	ding on the fittings and clamping jumpers						
installed.								
- Limit sizes of oblong								
- from 8 x 5 to 9.5 x 6n								
- from 9.5 x 2.5 to 11 x								
- from 11 x 4 to 13 x 6 - from 12.5 x 8 to 14.2								
		l inputs are interconnected by an internal shunt,						
as are the phase (L) an		i inputs are interconnected by an internal shuft,						
	ble glands, with NBR 70 Shore gaskets (Silicone p	oossible on request)						
	can receive one or two seals (delivered with 5 re							
	dized aluminum label, riveted							
	bly is done with the lid open.							
	on a tube can be done with the cover open or cl	osed.						
	Main references							
Part numbers	Hole dimension of the seal of cable gland on side A	Hole dimension of the seal of cable gland on side B, C						
YC34N2N5N5001	One NBR seal for round cable dia. 12mm max.	One NBR seal for oblong cable from 11 x 4 to 13 x 6mm						
100 1111010001	One set of 3 NBR seal for round cable dia. max. 8, 12, 14	2 Sets of 4 NBR seals for oblong cables,						
YC3N7N8N8001	and 16.3mm, including one special clamping saddle for14							
	to 16.3mm cables	from 11 x 4 to 13 x 6mm; from 12.5 x 8 to 14.2 x 9.2mm.						

Explosion proof connection boxes

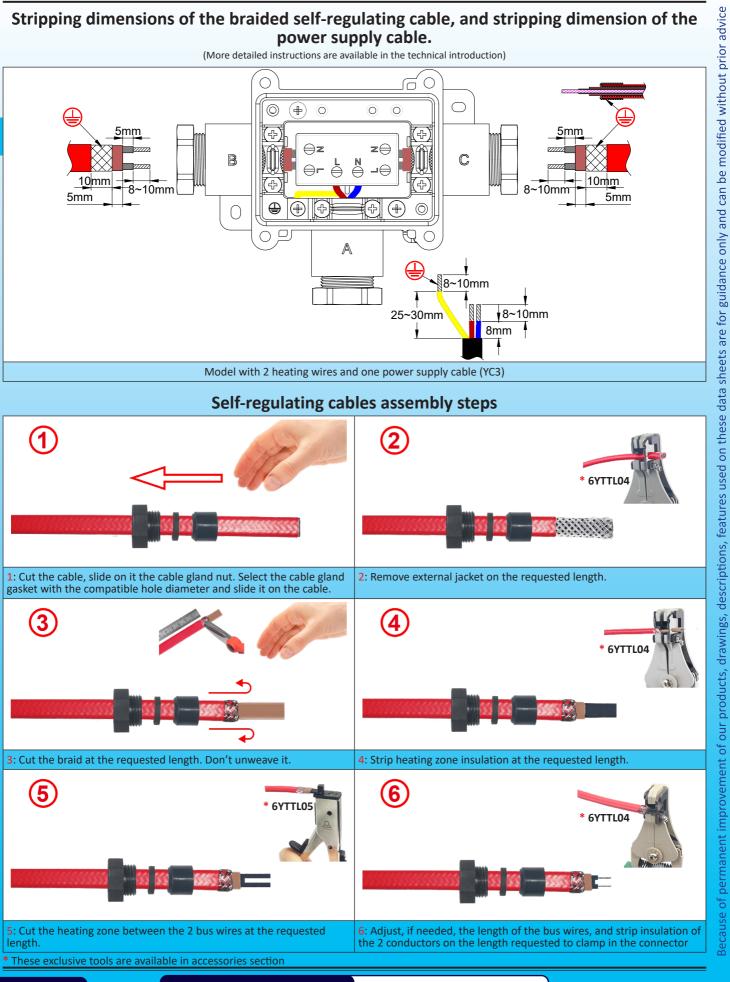

Cat4-3-7-34


Contact us


www.ultimheat.com

Explosion proof connection boxes





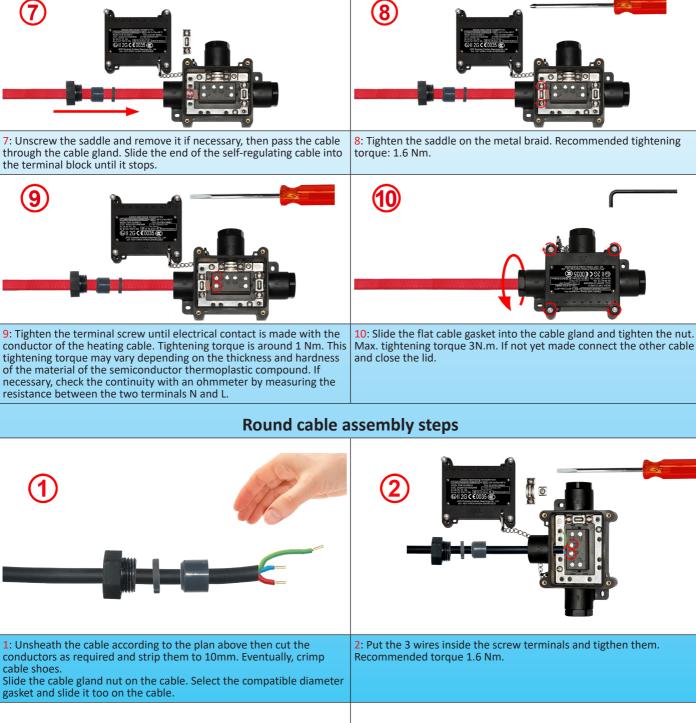

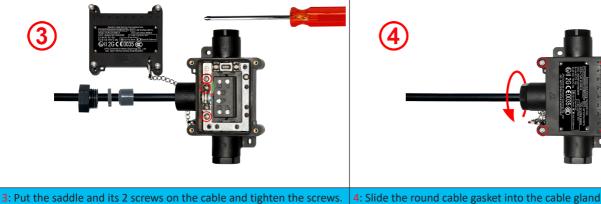


3: Put the saddle and its 2 screws on the cable and tighten the screws.
Recommanded torque for the 2 screws 1.6 Nm.4: Slide the round cable gasket into the cable gland and tighten the
nut. Maximum tightening torque 3N.m.

Contact us

www.ultimheat.com




Assembly steps on pipe of stainless steel legs for thermal insulation. This bracket has been designed to simplify these assembly steps.



1: Take the components of the mounting plate, which has 7 parts. The snap-on support (A), the two feet (B) and the four screws (C) Screw the bracket (A) on the bottom of the selected enclosure




2: Assemble the two feet with the four screws. Take the 2 legs (B) and the 4 screws (C)



3



4: Separate the box from the two feet. It will be reassembled after installation of the insulation and any metal protective sheath Assemble on the pipe with cable ties or stainless steel hose clamp



5: Place the heating cable on the tube following the recommendations of its manufacturer. Wrap the thermal insulation around the tube, leaving the end of the cable (s) out of the insulation at least 60mm from the two tabs. You just need to make a 50mm straight cut in the insulation to let each leg pass. Unscrew the bracket and enclosure sub-assembly and remove it



6: If the thermal insulation has a metal protective sheath, make two straight incisions of 4x42mm at a distance of 52mm to allow each of the two legs to pass. Provide the orifice(s) to exit the cables from the metal protection. Equip them with M25 cable glands with the appropriate gaskets for the dimensions of the cables. Close the metal sheath around the tube. Wrap insulation on the pipe, just making two straight cuts for the legs



7: Seal the clearance between the metal tabs and the outer sheath of the piping with a silicone or elastomeric sealing resin. Wrap the mechanical protection around the insulation, making two straight cuts for the legs





8: Refit the ends of the legs with the 4 screws on the box.





Cat4-3-7-37



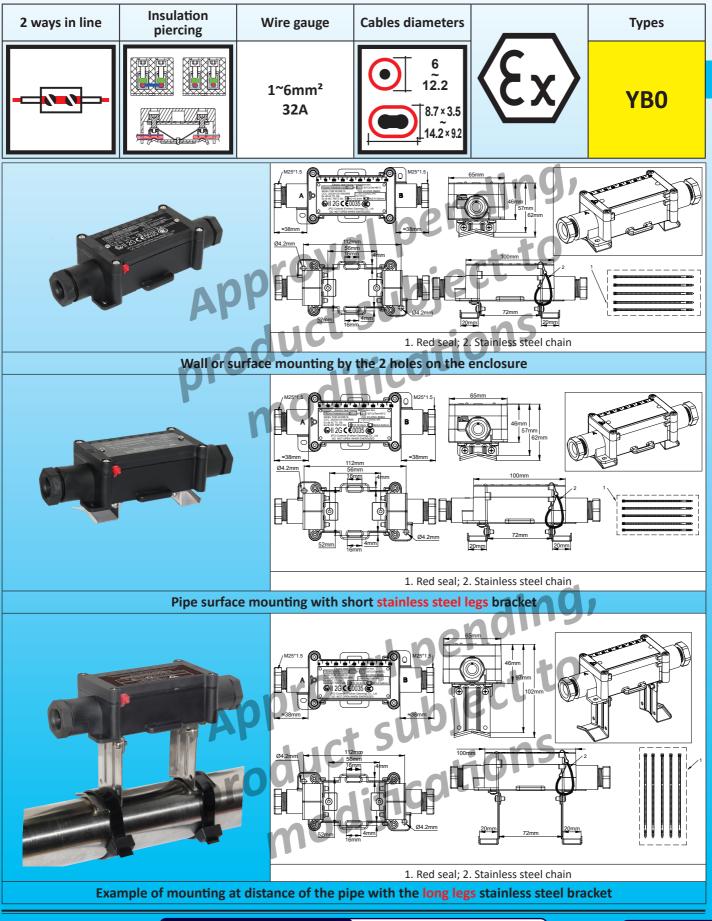

www.ultimheat.com

Contact us



Applications

This box is used to connect a power supply cable to a self-regulating cable, or two self-regulating cables end to end. It can be mounted flat on a surface, or on a pipe, including with insulation up to 50mm thick. Access to connectors is very easy, and the connection is very simple, in particular for flat self-regulating cables with metallic protective braid. They can be used in domestic and industrial environments as well as in explosive atmospheres. **Approvals:** - Industrial applications in electrical heat tracing according to IEC 62395. Applications in explosive environments: These boxes are approved as Increased safety "e": (Device preventing the production of sparks at the connections by ensuring the necessary mechanical support and insulation). **Protection against gaz:** II 2G Ex cb IIC T5 Gb **Protection against dust:** II 2D Ex tb IIIC T95°C Db **Certificates:** ATEX: TÜV 22 ATEX 8896 X IECEX: IECEX TUR 22.0061 X CCCEx: ??

Main features

Material: Black PPS, 100mm x 65mm x 46mm (Cable glands not included). Superior UV resistance. Waterproof grade: IP67 and IP69K (high pressure hot water washing) Shocks resistance: The highest, IK10 (Cable gland not included).

Mounting:

- Wall mounting: 2 wall mounting lugs allow the mounting on a flat surface. Holes distance 112 x 45mm.

- Pipe mounting with 10mm offset: Two removable stainless steel legs are supplied as standard and allow mounting on a tube using a nylon tie or metal clamp. The distance from the tube limits the heating of the box.

- <u>Pipe mounting with 50mm offset</u>: Two removable stainless steel legs allow the installation of a thermal insulation and its protection before snapping-on the box on it and making electric connections (Available as an accessory, see catalogue page on 6YTQW parts).

Terminals:

- The terminals are piercing the insulation layers with a multiple chisels (patented).

- These terminals are designed to receive self-regulating heating cables with any distance between the bus wires between 2mm and 10mm.

- These terminals can also possibly be used for conventional conductors of power supply cables.

- All terminals are protected against loosening by vibration or thermal shock.

- The mechanical tightening of the cable is ensured by a screwed metal saddle, usable on round or flat cable.

This patented saddle also ensures the earthing of the metal braid of the heating cables.

- Wire gauge: 3 x 1mm² to 3 x 6mm².

- Maximum permissible intensity: 32A 250V.

Cables outlet: With M25 cable glands, with 70 shore NBR gaskets (Silicone is available on request).

- <u>Maximum diameter of round cables</u>: 8; 12, 14, 16.3mm depending on the gaskets installed. A special tightening saddle is supplied for cables from 14 to 16.3mm diameter

- Limit sizes of oblong cables:

- from 8 x 5 to 9.5 x 6mm

- from 9.5 x 2.5 to 11 x 3.5mm

- from 11 x 4 to 13 x 6mm

- from 12.5 x 8 to 14.2 x 9.2mm

Inviolability: The case can receive one or two seals (Supplied with 5 red nylon ties for use in the sealing holes). Lid:

Ambient temperature limits: -40 to + 50°C. (-40°F; +122°F)

Maximum linear power of heating cable: 75W / m.

Maximum intensity: 32A per terminal.

Easy assembly: Assembly is made with full access to terminals when cover is removed. Mounting on wall or pipe can be made with cover removed or cover assembled closed without being hindered by the tightening link

Accessory: Bracket in stainless steel for offset mounting on pipe with up to 50mm insulation thickness. Designed to be added on the connection box with screws. See the accessories pages for models 6YTQT.

Options: Consult us for parts numbers of simplified models with only one dimension of cable gland gasket for round wire and flat wires, customized label, and specific set of accessories for pipe mounting (OEM versions).





Main references*

One self-regulating cable to one power supply cable (YB01).


Part numbers	Hole dimension of the seal of cable gland on side A	Hole dimension of the seal of cable gland on side B
YB01N2N500001	NBR seal for round cable dia. 12mm max.	NBR seal for oblong cable from 11 x 4 to 13 x 6mm.
YB01N7N800001	Set of 4 NBR seal for round cable dia. max. 8, 12, 14 and 16.3mm.	Set of 4 NBR seals for oblong cables, from 8 x 5 to 9.5 x 6mm; from 9.5 x 2.5 to 11 x 3.5mm; from 11 x 4 to 13 x 6mm; from 12.5 x 8 to 14.2 x 9.2mm.

Two self-regulating cables end to end (YB02)


Part numbers Hole dimension of the seal of cable gland on sides A and B					
YB02N5N500001NBR seal for oblong cable from 11 x 4 to 13 x 6mm.					
YB02N8N800001	Set of 4 NBR seals for oblong cables, from 8 x 5 to 9.5 x 6mm; from 9.5 x 2.5 to 11 x 3.5mm; from 11 x 4 to 13 x 6mm; from 12.5 x 8 to 14.2 x 9.2mm.				

Includes 2 stainless steel screwable legs for a 10mm offset mounting from the surface of a pipe.


Stripping dimensions of the braided self-regulating cable, and stripping dimension of the power supply cable.

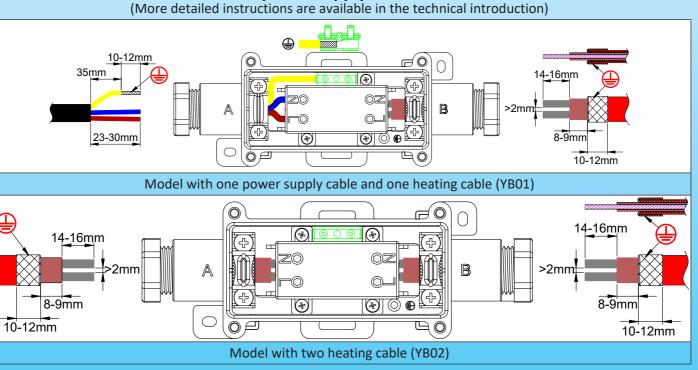

Self-regulating cables assembly steps

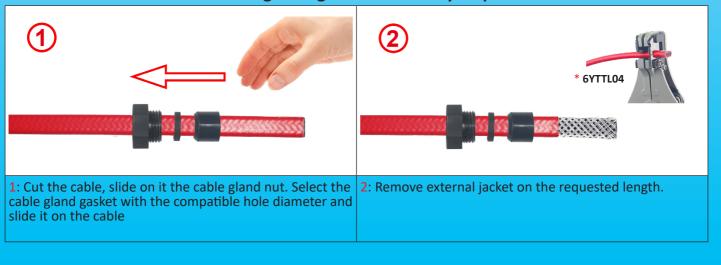


* These exclusive tools are available in accessories section

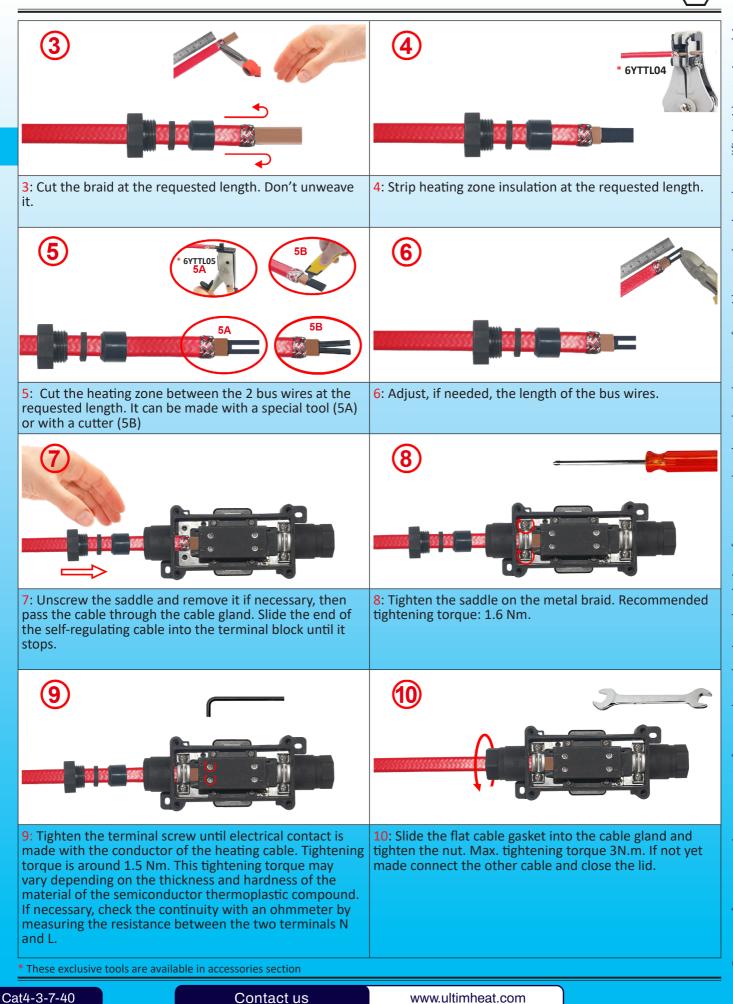





Round cable assembly steps

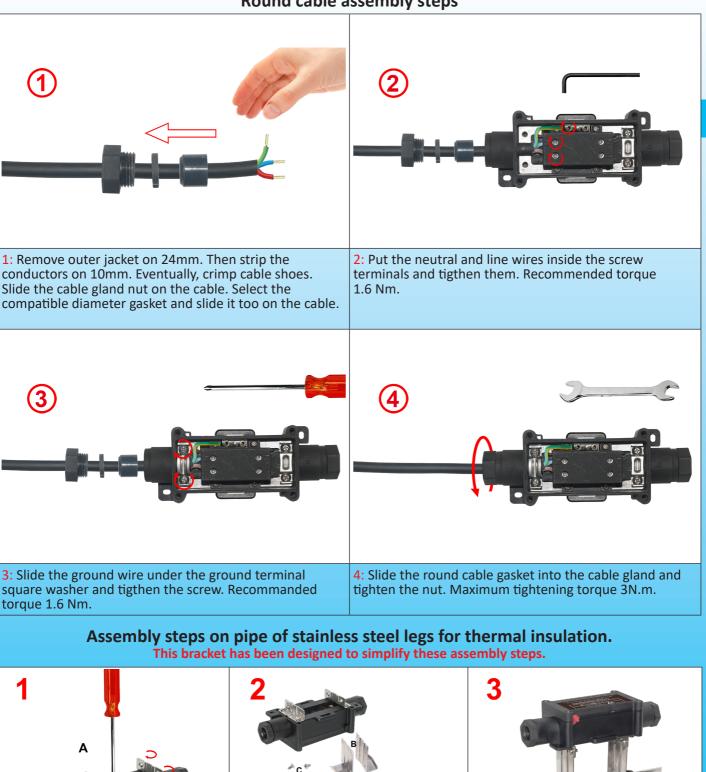

2: Assemble the two feet with the four screws.

Take the 2 legs (B) and the 4 screws (C)

Contact us

1: Take the components of the mounting

plate, which has 7 parts. The snap-on support (A), the two feet (B) and the four screws (C)

Screw the bracket (A) on the bottom of the

selected enclosure

www.ultimheat.com


Cat4-3-7-41

3: Secure the plate and its legs to the tube

necessary, nylon ties. Screw the 2 legs on the

with metal clamps (recommended), or if


bracket A and enclosure sub-assembly

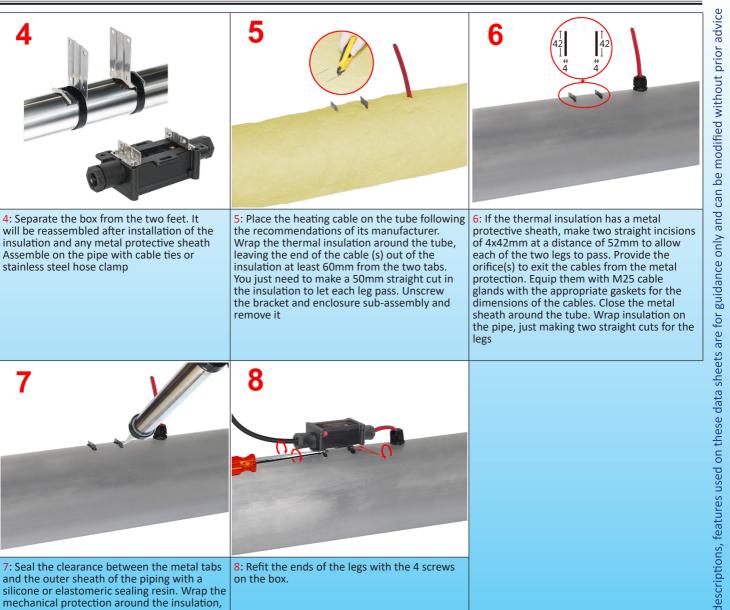

making two straight cuts for the legs



4 ways in line connection box in PPS for heat tracing cables, with insulation piercing terminals, for self-regulating cables

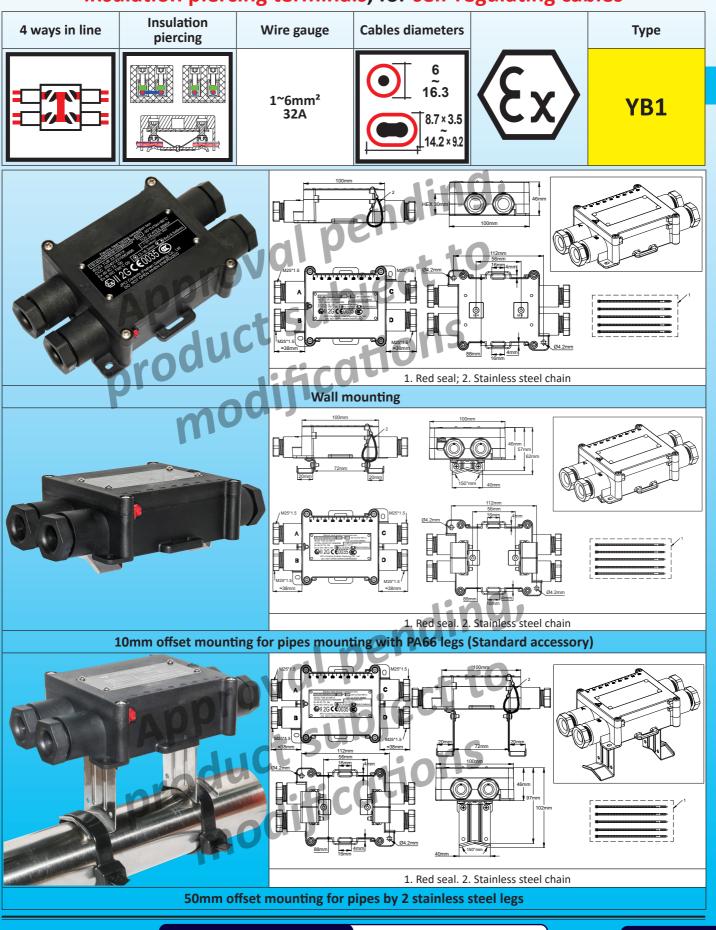

Contact us

www.ultimheat.com



Applications

This box is used to connect a **power supply cable to 3 self-regulating cable**. It can be mounted flat on a surface, or on a pipe, including with insulation up to 50mm thick.

It is designed to snap onto the pipe mounting brackets.

The terminal blocks are easily accessible and the connection is very simple, in particular for flat self-regulating cables with metallic protective braid.

Main features

Material: Black PPS, 100mm x 100mm x 46mm (Cable glands not included). Superior UV resistance. **Waterproof grade:** IP67 and IP69K (high pressure hot water washing)

Shocks resistance: The highest, IK10 (Cable gland not included).

Mounting:

- Wall mounting: 2 wall mounting lugs allow the mounting on a flat surface. Holes distance 80 x 110mm.

- Pipe mounting with 10mm offset: Two plastic legs supplied as standard allow attachment to a tube using nylon hose clamps.

<u>- Pipe mounting with 50mm offset</u>: One snap-on metal stainless steel bracket allows the installation of a thermal insulation and its protection before snapping-on the box on it and making electric connections. (Available as an accessory, see catalogue page on 6YTQW parts).

Terminals:

- The terminals intended for the self-regulating heating conductors are piercing the insulation layers with a double chisel blade, and retain the contact pressure by means of an elastic blade (patented).

- These terminals are designed to receive self-regulating heating cables with any distance between the bus wires between 2mm and 10mm.

- These terminals can also possibly be used for conventional conductors of power supply cables.

- The terminals for the conductors of the power supply cables are clamped with traditional pressure screw. We recommend them for this type of conductor, often flexible type, with many strands of small diameter, that can be damaged by the knives of the insulation piercing terminals.

- All terminals are protected against loosening by vibration or thermal shock.

- The mechanical tightening of the cable is ensured by a screwed metal saddle, usable on round or flat cable.

This patented saddle also ensures the earthing of the metal braid of the heating cables.

- Wire gauge: 3 x 1mm² to 3 x 2.5mm².

- Maximum permissible intensity: 16A 250V.

Interconnection: The neutral terminals (N) are internally connected by a jumper and so are the Line (L) terminals. **Cables outlet:** With M25 cable glands, with 70 shore NBR gaskets (Silicone is available on request).

- Maximum diameter of round cables: 8; 12 or 14mm depending on the gaskets installed.

- Limit sizes of oblong cables:

- from 8 x 5 to 9.5 x 6mm

- from 9.5 x 2.5 to 11 x 3.5mm

- from 11 x 4 to 13 x 6mm

- from 12.5 x 8 to 14.2 x 9.2mm

For more information about tightening possibilities on round and oblong cables, see the catalogue page on 6YTP cable glands.

Inviolability: The case can receive one or two seals (delivered with 5 red seals)

Sealing: Supplied with 5 red plastic ties for use in the sealing holes

Easy assembly: Assembly is made with full access to terminals when cover is removed. Mounting on wall or pipe can be made with cover removed or cover assembled.

Accessory: Bracket in stainless steel for offset mounting on pipe with up to 50mm insulation thickness. Designed to snap on the connection box. See the accessories pages on 6YTQT models **Options:**

- 3 output models (one cable gland is removed and replaced by a cap)

- Independent lines (internal jumpers between connectors are removed)

Consult us for parts numbers of simplified models with only one dimension of cable gland gasket for round wire and flat wires, customized label, and specific set of accessories for pipe mounting (OEM versions).






Main references

Model for 3 self-regulating cable and one power supply cable (YB14)


	3	
Part numbers	Hole dimension of the seal of cable gland on side A	Hole dimension of the seal of cable gland on side B, C, D
YB14N2N5N5N51	NBR seal for round cable dia. 12mm max.	NBR seal for oblong cable from 11 x 4 to 13 x 6mm.
YB14N7N8N8N81	Set of 4 NBR seal for round cable dia. max. 8, 12, 14 and 16.3mm, including one special clamping saddle for14 to 16.3mm cables	Set of 4 NBR seals for oblong cables, from 8 x 5 to 9.5 x 6mm; from 9.5 x 2.5 to 11 x 3.5mm; from 11 x 4 to 13 x 6mm; from 12.5 x 8 to 14.2 x 9.2mm.

Stripping dimensions of the braided self-regulating cable, and stripping dimension of the power supply cable.

(More detailed instructions are available in the technical introduction)

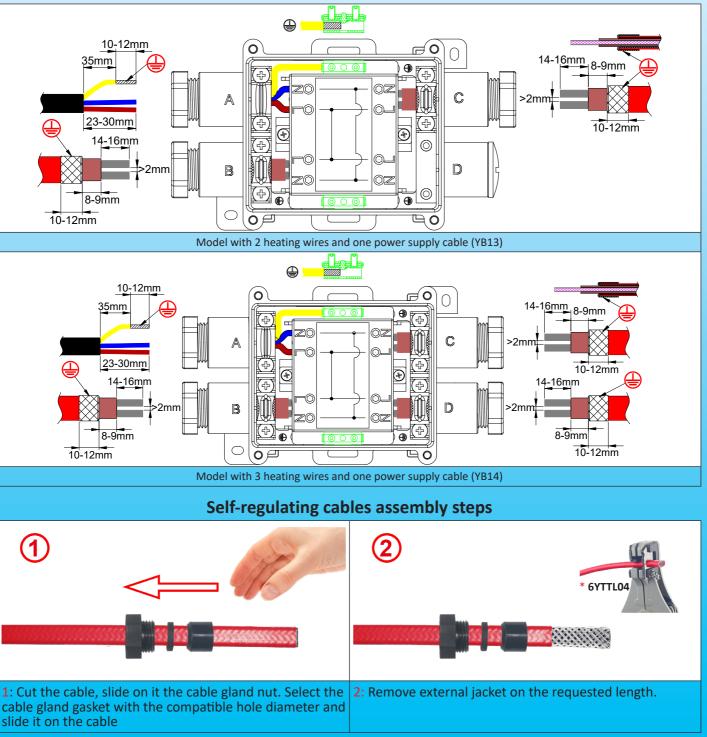


* These exclusive tools are available in accessories section

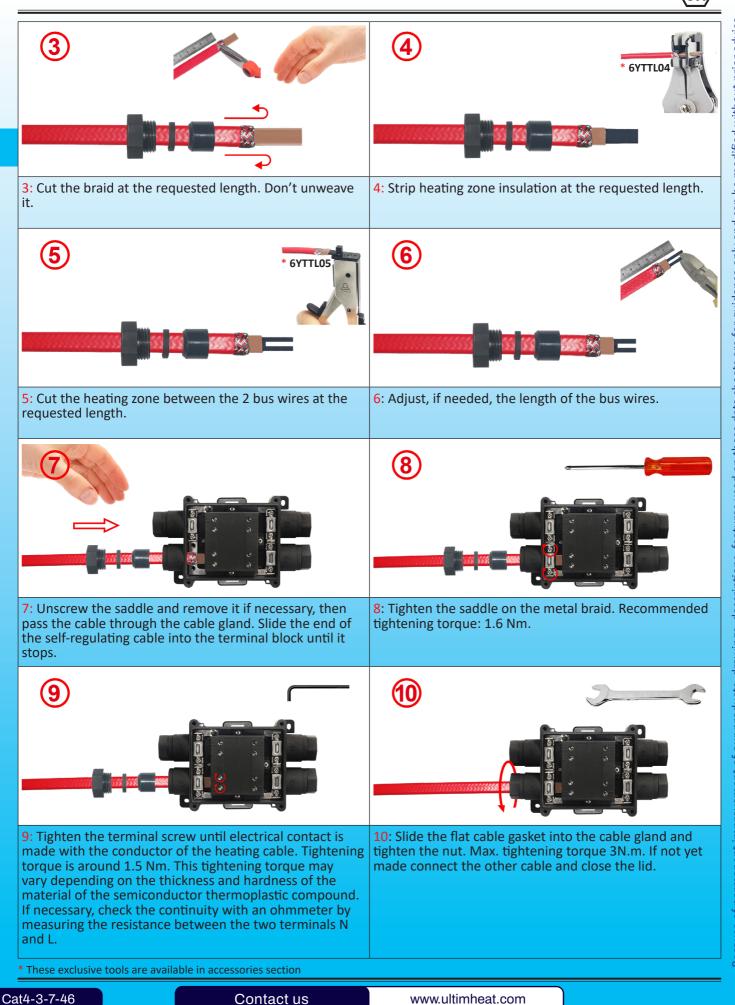




2

Round cable assembly steps

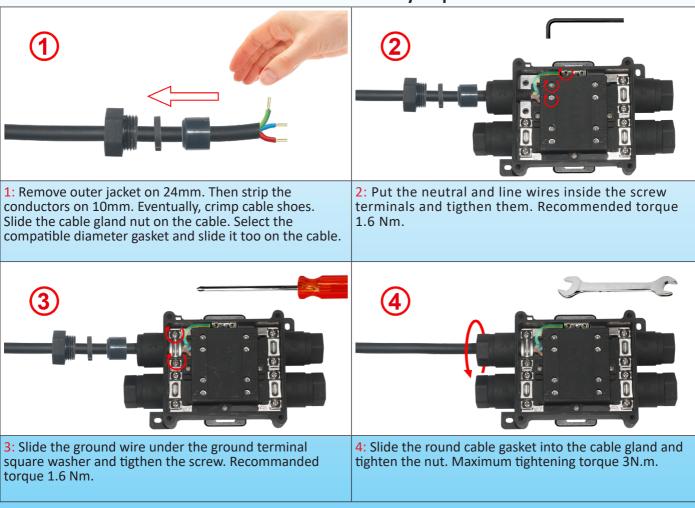




2 ways in line connection box in aluminum for heat tracing cables, with insulation piercing terminals, for self-regulating cables

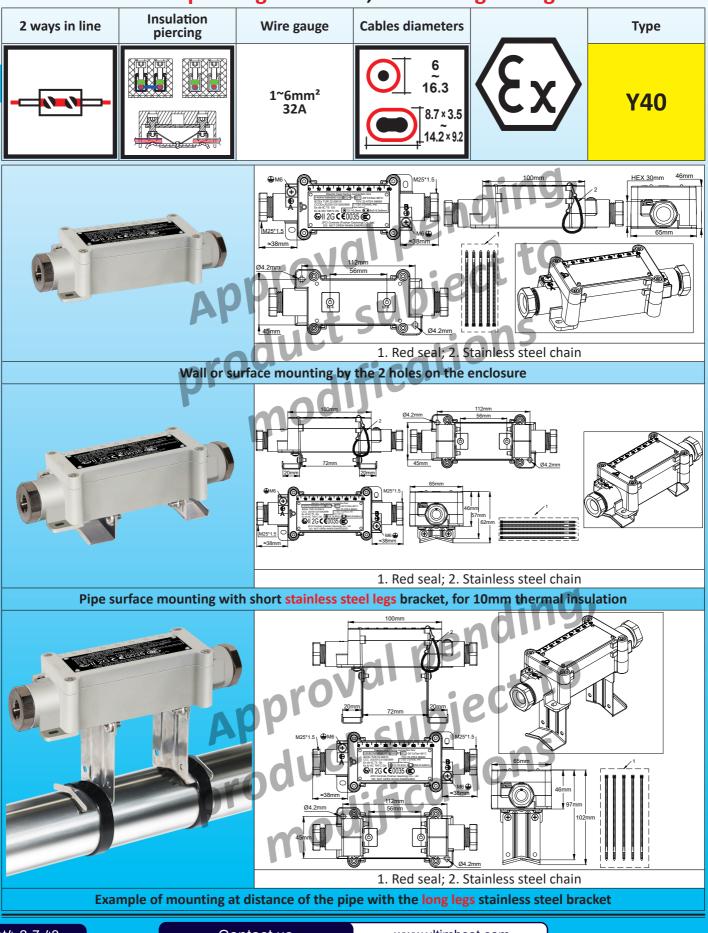







Applications

This bo	ox is used t	to co	nnect a pow	er supply	cable t	o a se	elf-regul	ating	cable	, or	two	sel	f-reg	gulat	ing ca	ables e	end to	end.
It can b	oe mounte	d fla	t on a surface	, or on a	pipe, in	cludiı	ng with i	nsula	ition u	p to	50r	nm	thic	ς.				
-				1.1.1								~						

Access to connectors is very easy, and the connection is very simple, in particular for flat self-regulating cables with metallic protective braid.

They can be used in domestic and industrial environments as well as in explosive atmospheres.

Approvals:

- Industrial applications in electrical heat tracing according to IEC 62395.

- Applications in explosive environments: These boxes are approved as Increased safety "e": (Device preventing the production of sparks at the connections by ensuring the necessary mechanical support and insulation).

Protection against gaz: 🐵 II 2G Ex cb IIC T5 Gb

Protection against dust: 🐵 II 2D Ex tb IIIC T95°C Db

Certificates:

ATEX: TÜV 22 ATEX 8896 X

IECEx: IECEx TUR 22.0061 X

Main features

Material: Aluminium, 100mm x 65mm x 46mm (Cable glands not included). Grey epoxy painting. Superior UV resistance.

Waterproof grade: IP67 and IP69K (high pressure hot water washing)

Shocks resistance: The highest, IK10 (Cable gland not included).

Mounting:

- Wall mounting: 2 wall mounting lugs allow the mounting on a flat surface. Holes distance 112 x 45mm.

- <u>Pipe mounting with 10mm offset:</u> Two removable stainless steel legs are supplied as standard and allow mounting on a tube using a nylon tie or metal clamp. The distance from the tube limits the heating of the box.

- <u>Pipe mounting with 50mm offset</u>: Two removable stainless steel legs allow the installation of a thermal insulation and its protection before snapping-on the box on it and making electric connections (Available as an accessory, see catalogue page on 6YTQW parts).

Terminals:

- The terminals are piercing the insulation layers with a multiple chisels (patented).

- These terminals are designed to receive self-regulating heating cables with any distance between the bus wires between 2mm and 10mm.

- These terminals can also possibly be used for conventional conductors of power supply cables.
- All terminals are protected against loosening by vibration or thermal shock.
- The mechanical tightening of the cable is ensured by a screwed metal saddle, usable on round or flat cable.
- This patented saddle also ensures the earthing of the metal braid of the heating cables.
- Wire gauge: $3 \times 1 \text{ mm}^2$ to $3 \times 6 \text{mm}^2$.
- Maximum permissible intensity: 32A 250V.

Cables outlet: with M25 cable glands, with 70 shore NBR gaskets (Silicone is available on request).

- <u>- Maximum diameter of round cables:</u> 8; 12, 14, 16.3mm depending on the gaskets installed. A special tightening saddle is supplied for cables from 14 to 16.3mm diameter
- Limit sizes of oblong cables:
- from 8 x 5 to 9.5 x 6 mm
- from 9.5 x 2.5 to 11 x 3.5 mm
- from 11 x 4 to 13 x 6mm
- from 12.5 x 8 to 14.2 x 9.2mm

Inviolability: The case can receive one or two seals (Supplied with 5 red nylon ties for use in the sealing holes). Lid:

Ambient temperature limits: -40 to + 50° C. (-40°F ; +122°F)

Maximum linear power of heating cable: 75W / m.

Maximum intensity: 32A per terminal.

Easy assembly: Assembly is made with full access to terminals when cover is removed. Mounting on wall or pipe can be made with cover removed or cover assembled closed without being hindered by the tightening link

Accessory: Bracket in stainless steel for offset mounting on pipe with up to 50mm insulation thickness. Designed to be added on the connection box with screws. See the accessories pages for models 6YTQT.

Options:

Consult us for parts numbers of simplified models with only one dimension of cable gland gasket for round wire and flat wires, customized label, and specific set of accessories for pipe mounting (OEM versions).

Main references*

One self-regulating cable to one power supply cable (Y401)


Part numbers	Hole dimension of the seal of cable gland on side A	Hole dimension of the seal of cable gland on side B
Y401N2N500001	NBR seal for round cable dia. 12mm max.	NBR seal for oblong cable from 11×4 to 13×6 mm.
Y401N7N800001	Set of 4 NBR seal for round cable dia. max. 8, 12, 14 and 16.3mm.	Set of 4 NBR seals for oblong cables, from 8 × 5 to 9.5 × 6mm; from 9.5 × 2.5 to 11 × 3.5mm; from 11 × 4 to 13 × 6mm; from 12.5 × 8 to 14.2 × 9.2mm.

Two self-regulating cables end to end (Y402)

Part numbers	Hole dimension of the seal of cable gland on sides A and B
Y402N5N500001	NBR seal for oblong cable from 11×4 to 13×6 mm.
Y402N8N800001	Set of 4 NBR seals for oblong cables, from 8 × 5 to 9.5 × 6mm; from 9.5 × 2.5 to 11 × 3.5mm; from 11 × 4 to 13 × 6mm; from 12.5 × 8 to 14.2 × 9.2mm.

* Includes 2 stainless steel screwable legs for a 10mm offset mounting from the surface of a pipe.

Stripping dimensions of the braided self-regulating cable, and stripping dimension of the power supply cable.

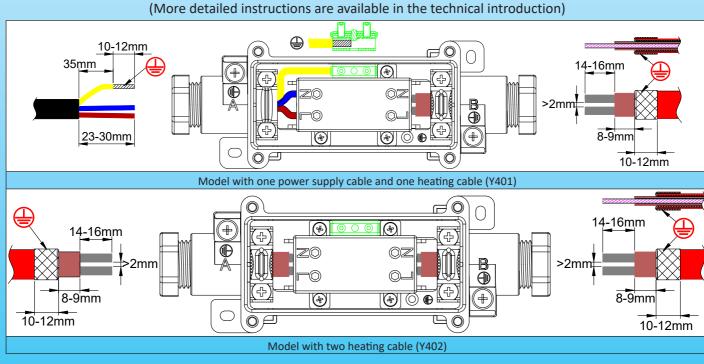

Self-regulating cables assembly steps

1		2	6YTTL04
1: Cut the cable, slide on it the cable gland nut. Select the cable gland pressure washer and the gasket with the compatible hole diameter and slide them on the cable.		2: Remove external jacket on the requested length.	
at4-3-7-50	Contact us	www.ultimheat.com	ı




permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Because of

Explosion proof thermostats




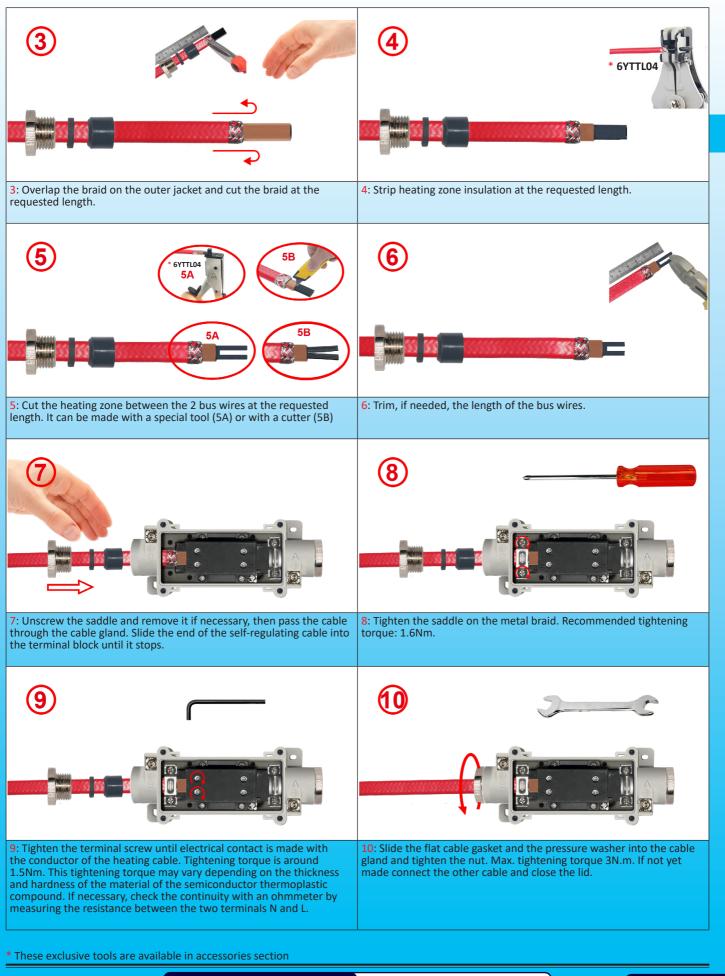

www.ultimheat.com


Explosion proof thermostats

Round cable assembly steps

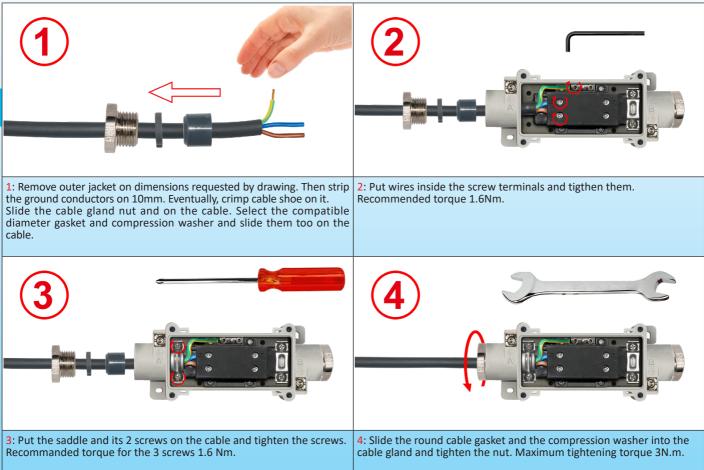

Assembly steps on pipe of stainless steel legs for thermal insulation.

This bracket has been designed to simplify these assembly steps.

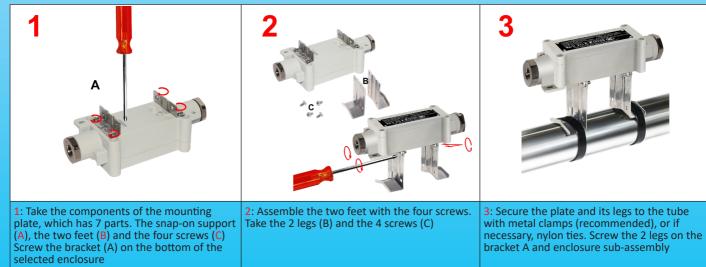


Explosion proof thermostats





4: Separate the box from the two feet. It will be reassembled after installation of the insulation and any metal protective sheath Assemble on the pipe with cable ties or stainless steel hose clamp



5: Place the heating cable on the tube following the recommendations of its manufacturer. Wrap the thermal insulation around the tube, leaving the end of the cable (s) out of the insulation at least 60mm from the two tabs. You just need to make a 50mm straight cut in the insulation to let each leg pass. Unscrew the bracket and enclosure sub-assembly and remove it



6: If the thermal insulation has a metal protective sheath, make two straight incisions of 4x42mm at a distance of 52mm to allow each of the two legs to pass. Provide the orifice(s) to exit the cables from the metal protection. Equip them with M25 cable glands with the appropriate gaskets for the dimensions of the cables. Close the metal sheath around the tube. Wrap insulation on the pipe, just making two straight cuts for the legs




8

7: Seal the clearance between the metal tabs and the outer sheath of the piping with a silicone or elastomeric sealing resin. Wrap the mechanical protection around the insulation, making two straight cuts for the legs 8: Refit the ends of the legs with the 4 screws on the box.



4 ways in line connection box for heat tracing cables, with insulation piercing terminals, for self-regulating cables

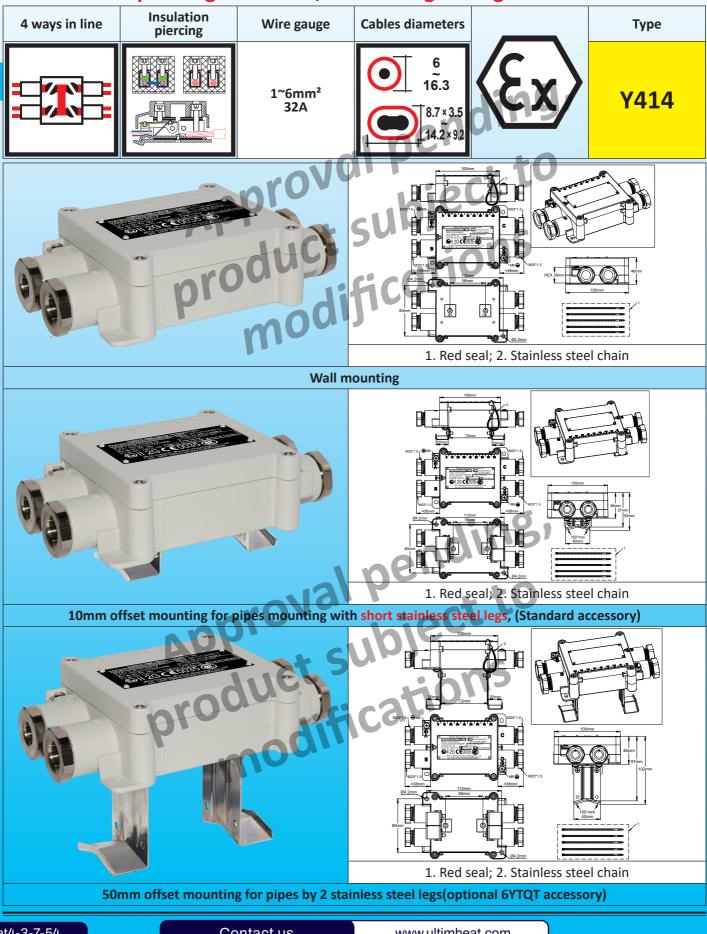



2

Example of mounting on pipe with the plastic legs

Example of mounting at distance of the pipe with the stainless steel bracket type 6YTQT



U Applications

This box is used to connect a **power supply cable to 3 self-regulating cable.** It can be mounted flat on a surface, or on a pipe, including with insulation up to 50mm thick.

It is designed **to be screwed** on the pipe mounting legs The terminal blocks are easily accessible and the connection is very simple, in particular for flat self-regulating cables

with metallic protective braid. Protection against gaz:

Il 2G Ex cb IIC T5 Gb

Protection against dust:

Certificates:

ATEX: TÜV 22 ATEX 8896 X

IECEx: IECEx TUR 22.0061 X CCCEx: ??

Main features

Material: Aluminium, 100mm x 65mm x 46mm (Cable glands not included). Grey epoxy painting. Superior UV resistance.

Waterproof grade: IP67 and IP69K (high pressure hot water washing)

Shocks resistance: The highest, IK10 (Cable gland not included).

Mounting:

- Wall mounting: 2 wall mounting lugs allow the mounting on a flat surface. Holes distance 112 x 45mm.

- <u>Pipe mounting with 10mm offset:</u> Two removable stainless steel legs are supplied as standard and allow mounting on a tube using a nylon tie or metal clamp. The distance from the tube limits the heating of the box.

- <u>Pipe mounting with 50mm offset:</u> Two removable stainless steel legs allow the installation of a thermal insulation and its protection before snapping-on the box on it and making electric connections (Available as an accessory, see catalogue page on 6YTQW parts).

Terminals:

- The terminals are piercing the insulation layers with a multiple chisels (patented).

- These terminals are designed to receive self-regulating heating cables with any distance between the bus wires between 2mm and 10mm.

- These terminals can also possibly be used for conventional conductors of power supply cables.
- All terminals are protected against loosening by vibration or thermal shock.
- The mechanical tightening of the cable is ensured by a screwed metal saddle, usable on round or flat cable.
- This patented saddle also ensures the earthing of the metal braid of the heating cables.
- Wire gauge: 3 x 1mm² to 3 x 6mm².
- Maximum permissible intensity: 32A 250V.
- Cables outlet: With M25 cable glands, with 70 shore NBR gaskets (Silicone is available on request).
- Maximum diameter of round cables: 8, 12, 14, 16.3mm depending on the gaskets installed. A special tightening
- saddle is supplied for cables from 14 to 16.3mm diameter
- Limit sizes of oblong cables:
- from 8 x 5 to 9.5 x 6mm

Contact us



- from 9.5 x 2.5 to 11 x 3.5mm

- from 11 x 4 to 13 x 6mm

- from 12.5 x 8 to 14.2 x 9.2mm

Inviolability: The case can receive one or two seals (Supplied with 5 red nylon ties for use in the sealing holes). Lid:

Ambient temperature limits: -40 to +50°C. (-40°F; +122°F)

Maximum linear power of heating cable: 75W / m.

Maximum intensity: 32A per terminal.

Easy assembly: Assembly is made with full access to terminals when cover is removed. Mounting on wall or pipe can be made with cover removed or cover assembled closed without being hindered by the tightening link

Accessory: Bracket in stainless steel for offset mounting on pipe with up to 50mm insulation thickness. Designed to be added on the connection box with screws. See the accessories pages for models 6YTQT.

Options:

Consult us for parts numbers of simplified models with only one dimension of cable gland gasket for round wire and flat wires, customized label, and specific set of accessories for pipe mounting (OEM versions).


Main references

Model for 3 self-regulating cable and one power supply cable (Y414)

Part numbers	Hole dimension of the seal of cable gland on side A	Hole dimension of the seal of cable gland on side B, C, D
Y414N2N5N5N51	NBR seal for round cable dia. 12mm max.	NBR seal for oblong cable from 11 x 4 to 13 x 6mm.
	and 16.3mm.	Set of 4 NBR seals for oblong cables, from 8 x 5 to 9.5 x 6mm; from 9.5 x 2.5 to 11 x 3.5mm; from 11 x 4 to 13 x 6mm; from 12.5 x 8 to 14.2 x 9.2mm.

* Includes 2 plastic tabs for wall mounting and 2 snap-on plastic legs for a 10mm offset mounting from the surface of a pipe.

Stripping dimensions of the braided self-regulating cable, and stripping dimension of the power supply cable.

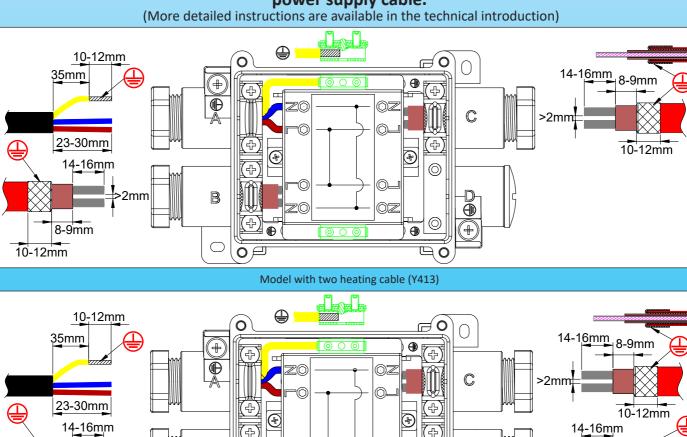

10-12mm

8-9mm

o

⊕

B

 \cap

⊕

₽

07

Model with 3 heating wires and one power supply cable (Y414)

⊕

•2mm

8-9mm

10-12mm




Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Explosion proof thermostats




Self-regulating cables assembly steps

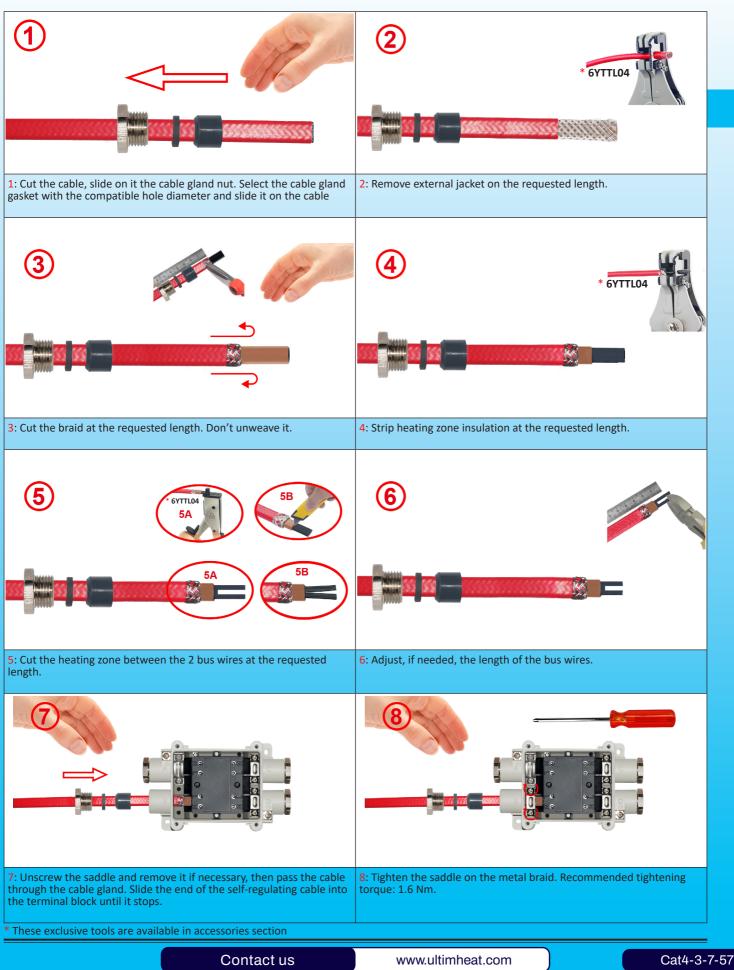

Explosion proof thermostats



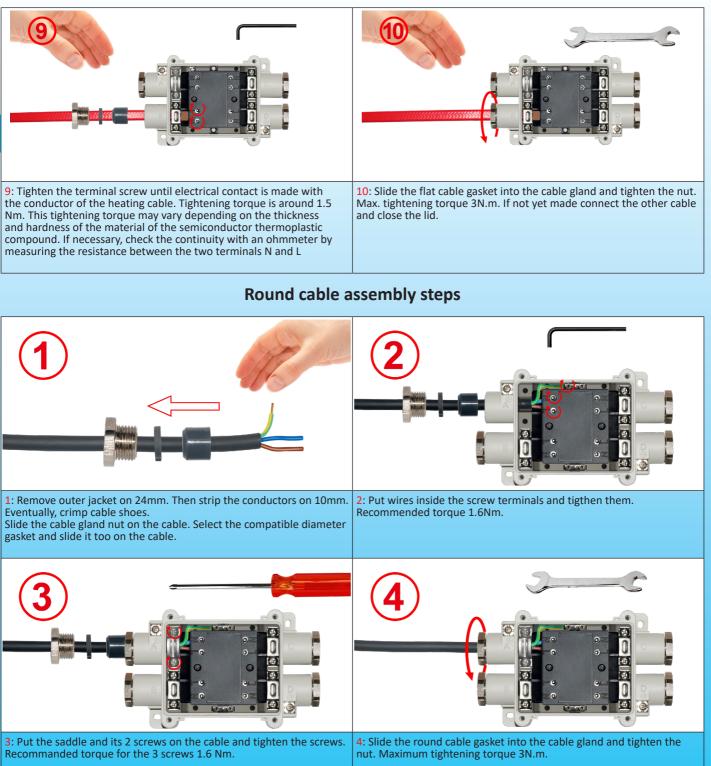






Knobs

All explosion proof thermostat with set point adjustment type KAA, have shafts with a diameter of 6mm and a 4.6mm flat. Except in special applications, these shafts have a length of 10mm. The screwdriver adjustment shaft of models KAC has a projecting length of 1 to 2mm. The set point increases when the knob is turned clockwise.

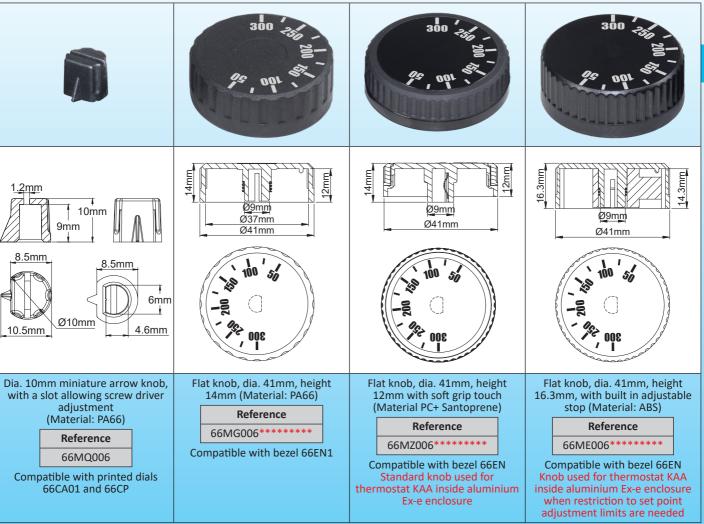

Knob printings

	White color printing in °C						
-35+35°C	-10+40°C	4-40°C	0-60°C	30-90°C	30-110°C	50-200°C	50-300°C
*30	40 35	40 <i>3</i> 5 ,		90 m 1	100 00 00 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	200 100 125	300 4
		· 4 . 64					-= **, 001, **
-350353AW	-100403AW	0040403AW	0000603AW	0300903AW	0301103AW	0502003AW	0503003AW
			White color	printing in °F			
-30-95°F	15-105°F	40-105°F	32-140°F	85-195°F	85-230°F	120-390°F	120-570°F
		100 ,	80 80 91	101 001 - C		192 ME 51	500 - 407
	18 00 00 V			三 「 「 」 の し 、 の し 、 、 、 、 、 、 の 、 の 、 の 、 の 、 の	99 001 021 00 92		, 002 N
-350353AX	-100403AX	0040403AX	0000603AX	0300903AX	0301103AX	0502003AX	0503003AX
*********: The complete reference is achieved by replacing the * in red in the knob part number by the 9 characters, providing the printing and ts position. The flat of the shaft is facing the temperature range high end. Other high end position on request.							

Contact us


www.ultimheat.com

Knobs and dials for explosion proof thermostats types KAA and KAC



Dials and bezels

The scale on the dial is in the opposite direction of the knob scale, but the set point remains clockwise increase.

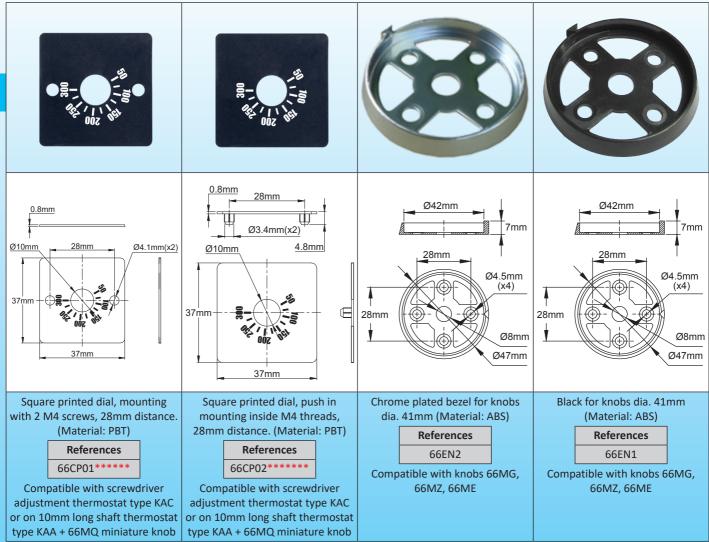

Dials printings

	White color printing in °C						
-35+35°C	-10+40°C	4-40°C	0-60°C	30-90°C	30-110°C	50-200°C	50-300°C
		8111 81111 811111	00 9 9 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	87 87 90 90 90 90 90 90 90 90 90 90 90 90 90			87 87 87 87 87 87 87 87 87 87 87 87 87 8
-35035CAW	-10040CAW	004040CAW	000060CAW	030090CAW	030110CAW	050200CAW	050300CAW
			White color	printing in °F			
-30-95°F	15-105°F	40-105°F	32-140°F	85-195°F	85-230°F	120-390°F	120-570°F
			10 10 10 10 10 10 10 10 10 10 10 10 10 1				
-35035CAX	1004004	004040CAX	000060CAX	030090CAX	030110CAX	050200CAX	050300CAX
-33033CAX	-10040CAX	004040CAA	UUUUUUCAA	USUUSUCAN	USUIIUCAX	030200CAX	UJUJUUCAA

********: The complete reference is achieved by replacing the * in red in the dial part number by the 9 characters providing the printing and its position. The flat of the shaft is facing the temperature range high end. Other high end position on request. Many other knobs, dials, bezels exist. See the full list in the catalogue N°1.












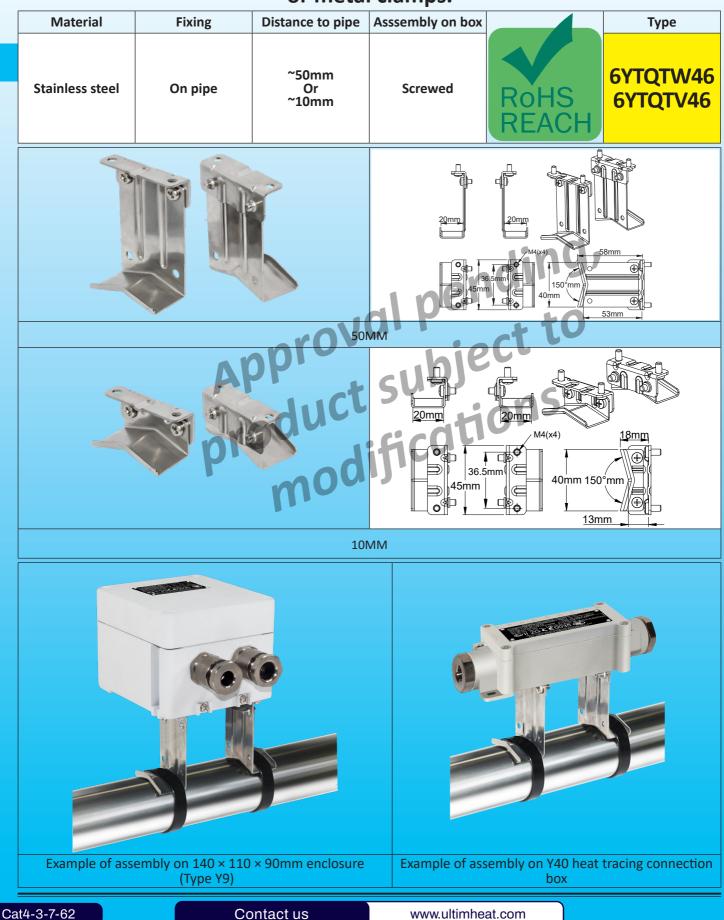





Applications

These metal brackets allow to mount connection boxes for heating cables on pipes, keeping a distance of about 10 or 50mm with the pipes, which allows thermal insulation and its protection to be installed. These models allow this insulation to be carried out after the heating cables have been laid and before the boxes have been laid and connected.


The removable legs, fixed by 2 screws on the side of the bracket body can be mounted on the pipe before the thermal insulation, then requesting only two straight cut on it before to screw the legs on the bracket body. The use of stainless-steel limits thermal conduction by the feet from the pipe to the box.

Part numbers					
Distance to pipe	Material	Part number	Can be used on:		
~10mm	SUS304	6YTQTW46	Y40, Y41, Y50, Y51, YB0, YB1, Y9		
~50mm	SUS304	6YTQTV46	Y40, Y41, Y50, Y51, YB0, YB1, Y9		

How to install these pipe mounting legs on thermally insulated pipe



1: Take the components of the mounting plate, which has 7 parts. The snap-on support (A), the two feet (B) and the four screws (C) Screw the bracket (A) on the bottom of the selected enclosure





3: Secure the plate and its legs to the tube with


metal clamps (recommended), or if necessary,

enclosure sub-assembly

nylon ties. Screw the 2 legs on the bracket A and

4

4: Separate the box from the two feet. It will be reassembled after installation of the insulation and any metal protective sheath Assemble on the pipe with cable ties or stainless steel hose clamp



5: Place the heating cable on the tube following the recommendations of its manufacturer. Wrap the thermal insulation around the tube, leaving the end of the cable (s) out of the insulation at least 60mm from the two tabs. You just need to make a 50mm straight cut in the insulation to let each leg pass. Unscrew the bracket and enclosure sub-assembly and remove it

sheath, make two straight incisions of 4x42mm at a distance of 52mm to allow each of the two legs to pass. Provide the orifice(s) to exit the cables from the metal protection. Equip them with M25 cable glands with the appropriate gaskets for the dimensions of the cables. Close the metal sheath around the tube. Wrap insulation on the pipe, just making two straight cuts for the legs



7: Seal the clearance between the metal tabs and the outer sheath of the piping with a silicone or elastomeric sealing resin. Wrap the mechanical protection around the insulation, making two straight cuts for the legs




8: Refit the ends of the legs with the 4 screws on the box.

Contact us

Stainless steel mounting foot for explosion proof heat tracing cable



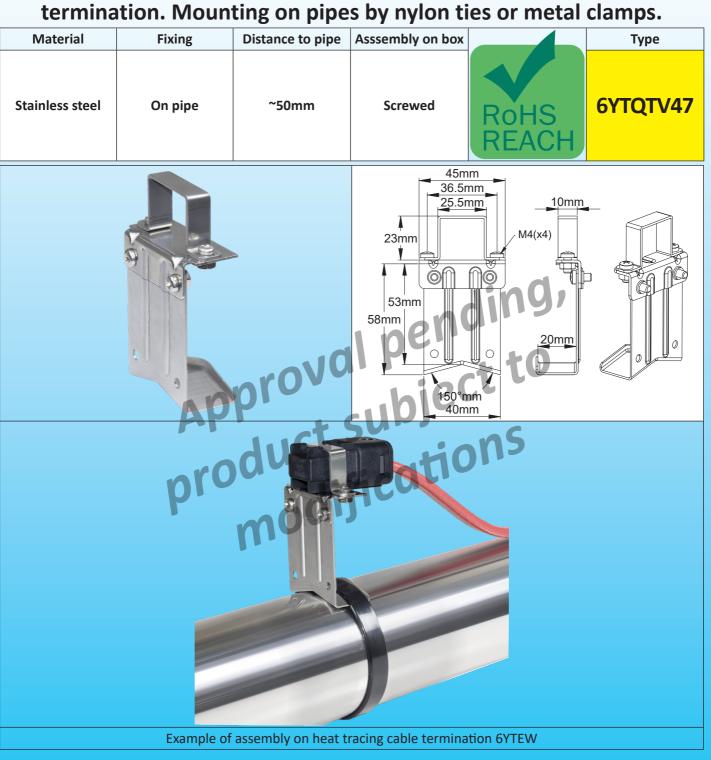


Applications

This metal bracket allows to mount heat tracing heating cable termination on pipes, keeping a distance of about 50mm with the pipes, which allows thermal insulation and its protection to be installed and avoid to reach Ex prohibited ambient temperature on the termination, e.a. when the pipe surface temperature is too high. The use of stainless-steel limits thermal conduction by the feet from the pipe to the box.

Part numbers

Material	Part number	Can be used on:
SUS304	6YTQTV47	6YTEW
SUS316	6YTQTV67	6YTEW



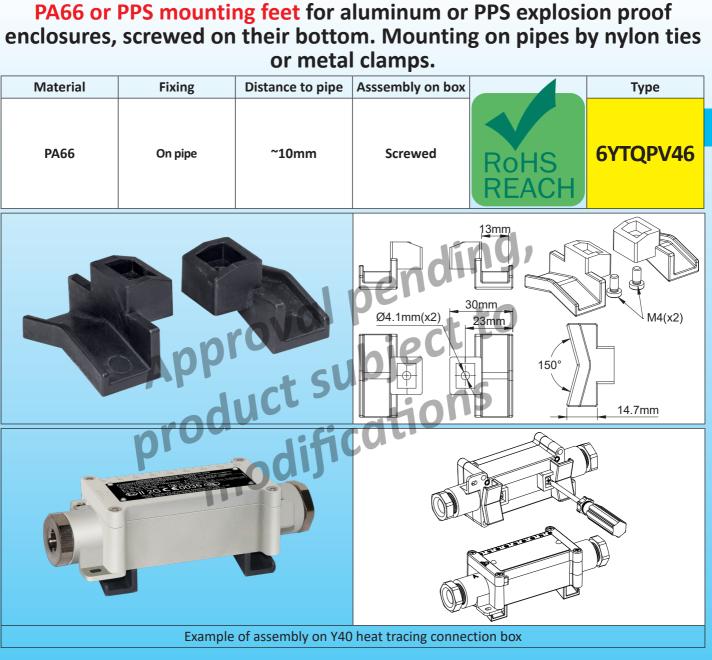

Applications

These economical plastic feet allow heating cable connection boxes to be mounted on pipes, while maintaining a space of approximately 10mm with the pipes, which allows solid mounting of the box on the pipes, while leaving sufficient passage for heating cables. These feet are not recommended for mounting on hot walls above 100°C. They are delivered with their two fixing screws

Part numbers

Part number	Can be used on:
6YTQPV46	Y40, Y41, Y50, Y51, YB0, YB1

4	mm² live	e and neutral	l termi	nals	PA conne	ction bloc	ks
Approval		Wires min and max cross Voltage section		Voltage Rating		Continuous operating temp.	Types
ATEX IECEX	4mm²	550 V	550 V 32 A		A 2 -		BW040
				3.1mm (x2) <u>4mn</u>	7mm 2.3n	(x2) 1m	41mm 41mm 33.4mm 40mm 1.2mm
Connection b (Available in bla		Connection block partition (Available i or blue)		Conn	ection block body	/	ion block side artition

Main applications

These terminal blocks have been developed to allow the electrical connection of KA series explosion-proof thermostats with wired output in EX "e" increased security boxes. They allow quick mounting directly on the body of the thermostat, without the need for a DIN rail for fixing, and their footprint is reduced. They are approved for this application. Their assembly can also be done directly by screwing onto a mounting board. They are intended for the connection of copper conductors inside enclosures.

Technical features

Dimensions: $40 \times 41 \times 6.8$ mm ($40 \times 41 \times 8$ mm with side flange added)

Material: PA, UL94VO, GWFI 960°

Colors available: blue or black

Rated cross section: 4mm² (EN 60079-7) Solid core, stranded, finely stranded, or with wire-end ferrules

Minimum cross section: 0.5mm² (EN 60079-7) Solid core, stranded, finely stranded, or with wire-end ferrules Maximum voltage: 550 V (ATEX, IECEX); 800V (IEC60947-7)

Maximum current: 32 A (ATEX, IECEX); 41A (IEC60947-7)

Environment pollution level: level 3

Ambient temperature limits:

Under normal operating conditions the temperature rise of the terminal blocks is max 40 K, (Measured with 110% of the maximum rated current as requested by standard). Due to the above mentioned the terminal blocks may be used in apparatus of temperature classes T6...T1 as long as the terminal block ambient temperature range is not exceeded as shown below. No part of terminal block must exceed 110°C under any condition.

T6 (- $60^{\circ}C \le Tamb \le +40^{\circ}C$)

T5 (- $60^{\circ}C \le Tamb \le +55^{\circ}C$)

T4 (- $60^{\circ}C \le Tamb \le +70^{\circ}C$)

Installation:

- Can be mounted directly on the body of KA thermostats using two M3 screws, without requiring a 35mm DIN rail, the mounting is identical for the 4mm² and 6mm² models which can be installed side by side.

- Can be mounted directly on a board by drilling a 4mm hole for M4 screw, with a square nut in the PA base

- ROHS and Reach compliants

Accessories :


- Shunts allowing the electrical connection of terminal blocks of the same section side by side without using wire connection terminals.

- 3 × 7mm rail allowing the terminal blocks to be joined together when a long assembly length is mounted on the body of the thermostat


- Snap-on partition for closing at the end of a row or as a separation between blocks of different polarity **Approvals:** IEC Ex certificate of conformity (ATEX for joint use with KA thermostats already ATEX/IECEx approved) **Marking:** Ex eb II C Gb (EN 60079-7). II 2 G Du (European standard Ex 2014/34/EU) **Earth connection block:** see specific page.





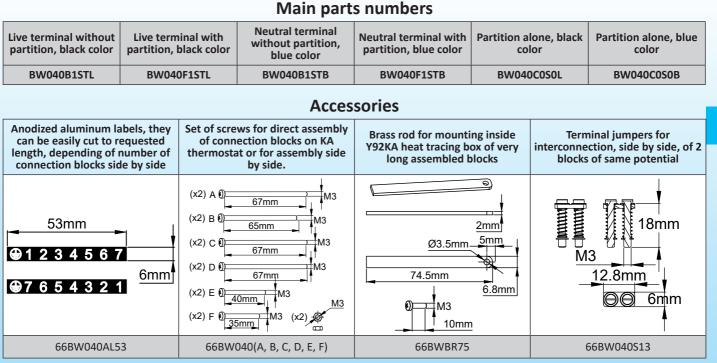

	Connection blocs for Ex-e boxes							3
6	mm² live	e and neutra	l tern	ninals	PA conne	cti	on block	(S
Approval	Wires mir and max cro section		Rat	ing	Number of connections		ontinuous operating temp.	Types
ATEX IECEX	6mm²	550 V	41	Α	2		60+110°C	BW060
						I.	Ŕ	

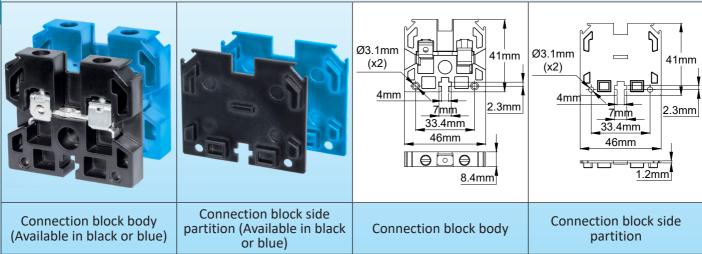

Main applications

These terminal blocks have been developed to allow the electrical connection of KA series explosion-proof thermostats with wired output in EX "e" increased security boxes. They allow quick mounting directly on the body of the thermostat, without the need for a DIN rail for fixing, and their footprint is reduced. They are approved for this application. Their assembly can also be done directly by screwing onto a mounting board. They are intended for the connection of copper conductors inside enclosures.

Technical features

Dimensions: 46 × 41 × 8.4mm (46 × 41 × 9.6mm with side flange added)

Material: PA, UL94VO, GWFI 960°

Colors available: Blue or black

Rated cross section: 6mm² (EN 60079-7) Solid core, stranded, finely stranded, or with wire-end ferrules

Minimum cross section: 0.5mm² (EN 60079-7) Solid core, stranded, finely stranded, or with wire-end ferrules **Maximum voltage:** 550 V (ATEX, IECEX); 800V (IEC60947-7)

Maximum current: 41 A (ATEX, IECEX); 41A (IEC60947-7)

Environment pollution level: level 3

Ambient temperature limits:

Under normal operating conditions the temperature rise of the terminal blocks is max 40 K, (Measured with 110% of the maximum rated current as requested by standard). Due to the above mentioned the terminal blocks may be used in apparatus of temperature classes T6...T1 as long as the terminal block ambient temperature range is not exceeded as shown below. No part of terminal block must exceed 110 °C under any condition.

T6 (- 60°C \leq Tamb \leq +40 °C)

T5 (- $60^{\circ}C \le Tamb \le +55^{\circ}C$)

T4 (- $60^{\circ}C \le Tamb \le +70^{\circ}C$)

Installation:

- Can be mounted directly on the body of KA thermostats using two M3 screws, without requiring a 35mm DIN rail, the mounting is identical for the 4mm² and 6mm² models which can be installed side by side.

- Can be mounted directly on a board by drilling a 4mm hole for M4 screw, with a square nut in the PA base

- ROHS and Reach compliants

Accessories:

Cat4-3-7-68


- Shunts allowing the electrical connection of terminal blocks of the same section side by side without using wire connection terminals.


- 3×7mm rail allowing the terminal blocks to be joined together when a long assembly length is mounted on the body of the thermostat

- Snap-on partition for closing at the end of a row or as a separation between blocks of different polarity **Approvals:** IEC Ex certificate of conformity (ATEX for joint use with KA thermostats already ATEX/IECEx approved) **Marking:** Ex eb II C Gb (EN 60079-7). II 2 G Du (European standard Ex 2014/34/EU) **Earth connection block:** See specific page.





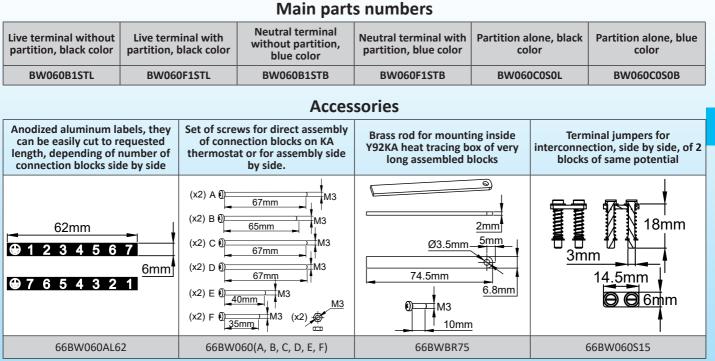

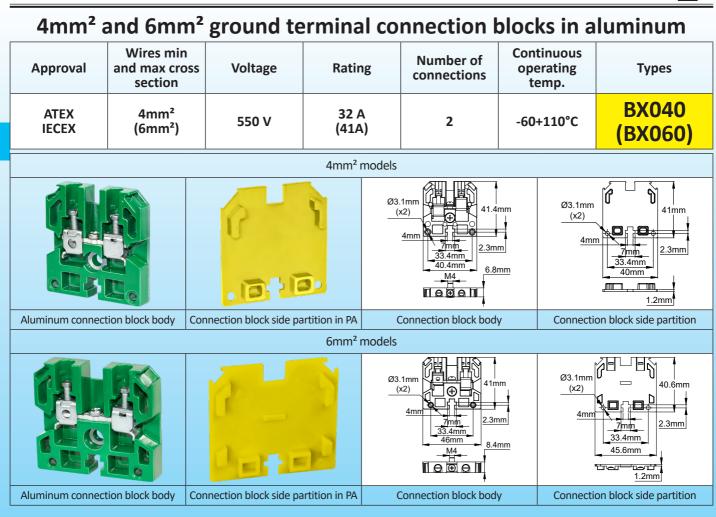

Main applications

These terminal blocks have been developed to allow to add ground electrical connection on KA series explosion-proof thermostats with wired output in EX "e" increased security boxes. They allow quick mounting directly on the body of the thermostat, without the need for a DIN rail for fixing, and their footprint is reduced. They are approved for this application. Their assembly can also be done directly by screwing onto a mounting board. They are intended for the connection of copper conductors inside enclosures.

Technical features

Dimensions:

- $4mm^2$: $40 \times 41 \times 6.8mm$ ($40 \times 41 \times 8mm$ with partition side flange added)

- 6mm²: 46 × 41 × 8.4mm (46 × 41 × 9.6mm with partition side flange added)

Material: Aluminum with green epoxy painting. Yellow green combination used for ground terminals is achieved by using a yellow partition in PA.

Colors available: Green for aluminum body, yellow for partition in PA

Rated section: 4mm² or 6mm² (EN 60079-7) Solid core, stranded, finely stranded, or with wire-end ferrules **Minimum cross section:** 0.5mm² (EN 60079-7) for solid core, stranded, finely stranded, or with wire-end ferrules **Ambient temperature limits:**

Under normal operating conditions the temperature rise of the terminal blocks is none. Due to the above mentioned the terminal blocks may be used on or in apparatus of temperature classes T6 to T1 Installation:

The yellow partition in PA is mandatory when this connection block is assembled beside a neutral or a live connection block.
 Designed to be mounted directly on the body of KA thermostats using two M3 screws, and a center M4 screw connection the terminal to the thermostat grounded body, without requiring a 35mm DIN rail, the mounting is identical for the 4mm² and 6mm²


- Can be mounted directly on a board by drilling a 4mm hole for M4 screw, with a square nut in the aluminum base

- ROHS and Reach compliants

Accessories :

- Shunts allowing the electrical connection of terminal blocks of the same section side by side without using wire connection terminals.

- 3x7mm rail allowing the terminal blocks to be joined together when a long assembly length is mounted on the body of the thermostat.

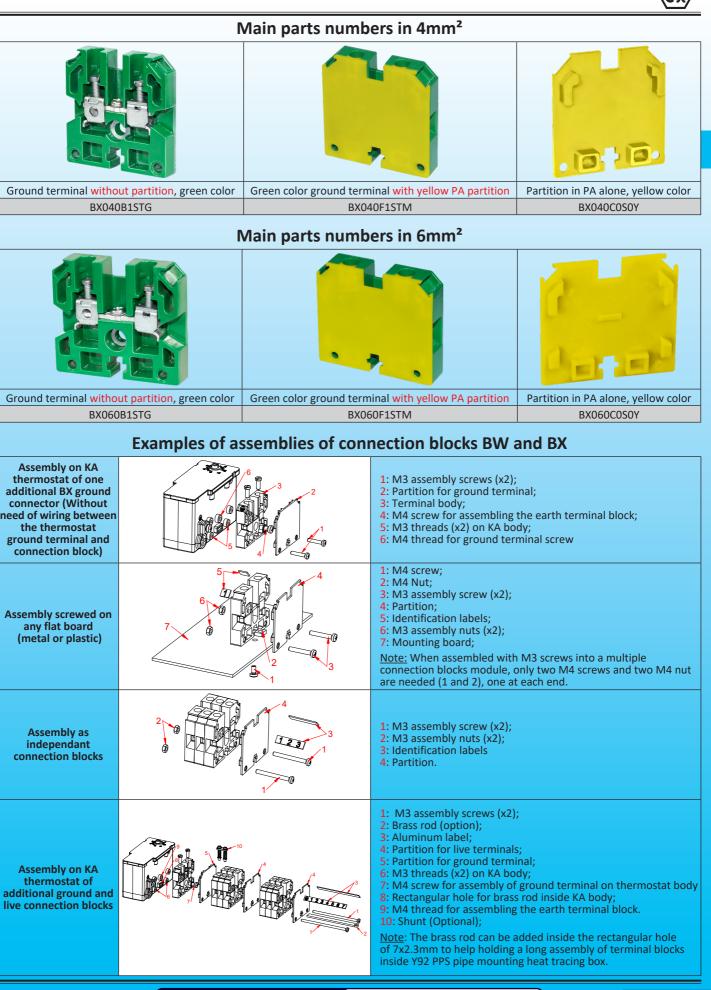

www.ultimheat.com

Contact us




Section 8 Special tools

Special tools

 Preparing the ends of heating cables and in particular cables with metallic braid and self-regulating cables can be tedious and often unfortunate and expensive. We have developed a range of hand tools to save time and achieve a professional and safe result.

- These tools are made in our factory, generally from mechanical bodies existing on the market.

Hexagonal crimping plier for small size wires.

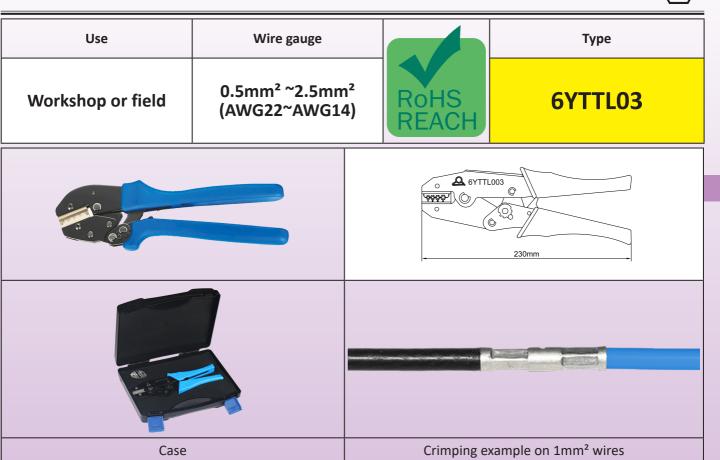

Applications


Manual pliers with hexagonal crimping for tubular butt connectors. These pliers are used to connect a heating cable end to end to a power cable or two heating cables together. It allows quick and economical connection of conductors of equal or different dimensions.

The dimensions of the jaws have been specially studied for applications in heating cables on **small diameter conductors.**

Main features

Allows crimping of non-insulated butt connectors according to DIN.

- Constant crimp size thanks to the ratchet system.
- The force is amplified thanks to the reduction mechanism.
- Easy cable exit thanks to the ratchet unlocking system
- Low weight (500 grs).
- Compatible butt connectors: Diameter 3.3 and 3.9 according to DIN 46267 Part 1
- Shipped inside a professional case, with 2 sets of jaws

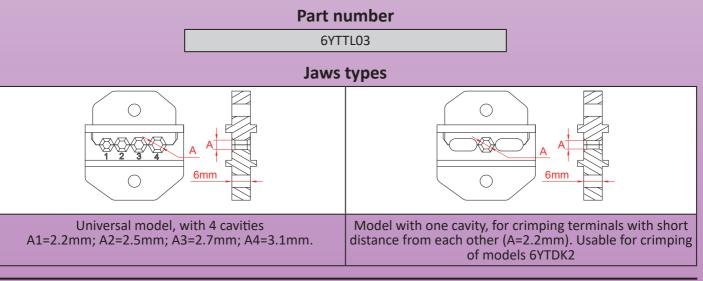

Contact us

$\langle x3 \rangle$

Exclusive stripping pliers for heat tracing cables with dedicated cutting blades according to all cable dimensions.



Exclusive stripping pliers for heat tracing cables with dedicated cutting blades according to all cable dimensions.



Applications

Special stripping pliers particularly suitable for oblong heating cables with two conductors.

The stripping and stripping of these oblong conductors is a long and difficult operation, causing a lot of waste. We **have specially developed** these tools in order to reduce waste and considerably reduce installation times.

Main features

There are a whole series of models in various sizes of heating cables. These cables can have up to 4 different layers made of several materials. For more information, see the technical introduction to this catalog which describes them. These layers can be made of different materials, more or less flexible, the most rigid and difficult to remove being that of carbon filled polyethylene core used in the low and medium temperature self-regulating cables. **Jaws:** They exist in two configurations.

- Bus wire stripping jaws. They are differentiated by the spacing of the conductors and their diameter. In the case of self-regulating cables with carbon filled polyethylene, we recommend stripping the wires one by one. Softening the polyethylene core with a lighter or heat gun may be necessary in some cases.

- Protective jackets removal jaws: They are defined by the external dimension of the cable after jacket removal.

These jaws have a cutting depth adjustment to avoid to cut the braid

Production of special clamps: Possible on request, send us cable samples

Each plier is shipped in a plastic professional case with a set of 6 jaws described below. Selected jaws numbers must be provided with order

Part number

6YTTL04

Jaws spare parts numbers


Jaws for bus wires stripping

aws for bus wires str					
Size	Bus wires distance	Wires diameter	Gauge	Marking	Part numbers
A1 3.8mm 2.5mm 7mm 5mm 7mm		1 to 1.5mm	0.5 to 1.5mm²	A1	6YTTL04A1
A2 3.8mm 2.5mm 7mm 7mm	2.5 3.8 5 7	1.5 to 1.9mm	2 to 2.5mm²	A2	6YTTL04A2
A3 3.8mm 2.5mm 7mm 7mm		1.9 to 2.3mm	2.5 to 4mm ²	A3	6YTTL04A3

advice




Exclusive stripping pliers for heat tracing cables with dedicated cutting blades according to all cable dimensions.

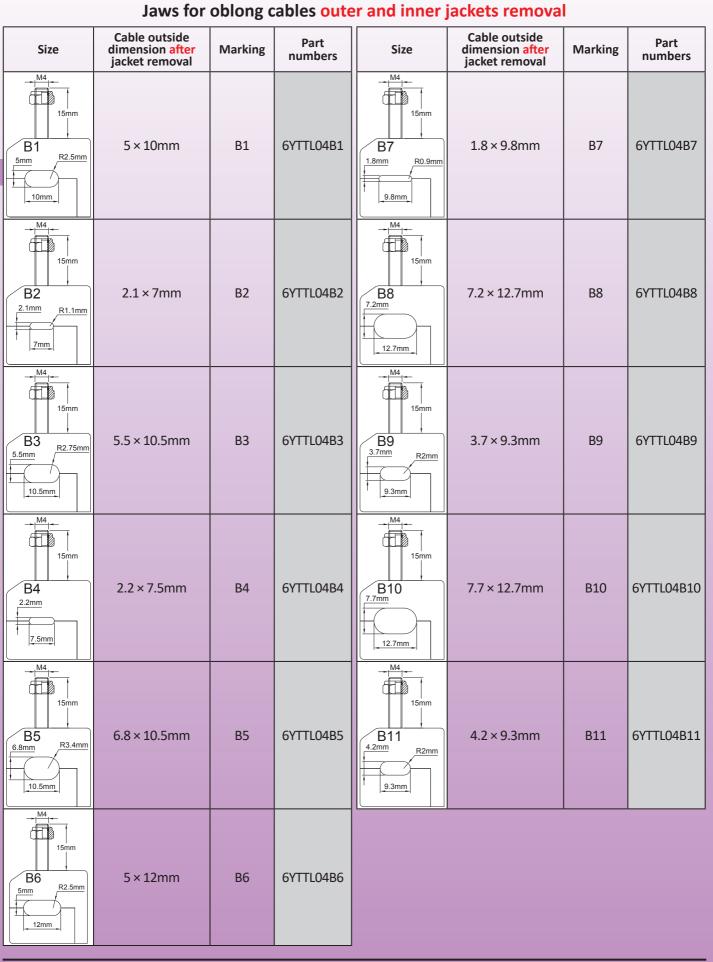

Cat4-3-8-6

Guillotine notching plier for cutting the heating zone between the conductors of oblong self-regulating cables

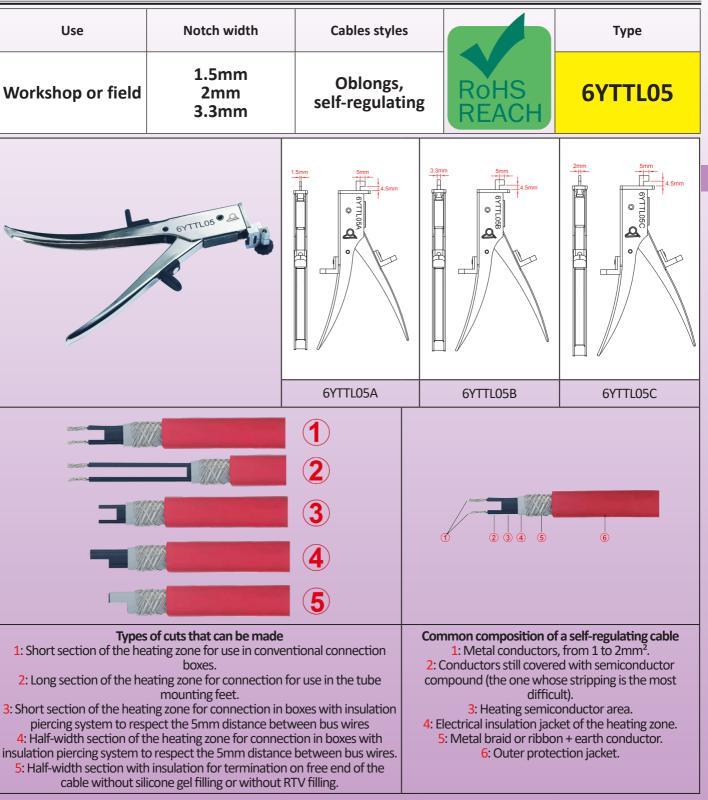

Applications

We **specially developed this guillotine hand shear** to solve two specific problems with low and medium temperature self-regulating cables:

- The difficulty of cutting the carbon filled polyethylene heating zone between the 2 bus wires.

- The obligation to maintain a mandatory insulation distance between the bus wires of these heating cables when they are connected to a terminal block or to one cable end seal. This minimum insulation distance depends on the use of the cable: In an industrial environment in a non-explosive atmosphere, this distance can range from 2 to 3.6mm depending on the materials. In an industrial environment and explosive atmosphere, using a type EX "e" connection, this minimal distance is 5mm. (See standards EN60079-7 and EN60947).

This tool allows to cut easily the polyethylene matrix to respect these distances in all cases.

Contact us

www.ultimheat.com



Guillotine notching plier for cutting the heating zone between the conductors of oblong self-regulating cables

Main features

According to the different models of the different manufacturers of self-regulating heating cables, the distance between the bus wires is highly variable, ranging from 1.5 to 4.2mm. **Jaws:**

Notch length: 5mm for each manual cutting operation.

Notch width: They exist in three configurations, allowing to cover the different spacings between existing between bus wires.

- Cables with distance between bus wires from 1.5 to 2mm.

- Cables with distance between bus wires from 2 to 3.3mm.
- Cables with distance between bus wires from 3.3 to 4.2mm.

This last model also allows cutting cables and conductors according to type 4 and 5 cuts.

Production of special pliers: Possible on request, send us cable samples.

Each guillotine notching plier is delivered in a professional box with a set of cable dimension guides

Part numbers

6YTTL05A	Guillotine notching plier for cables with distance between bus wires from 1.5 to 2mm.
6YTTL05B	Guillotine notching plier for cables with distance between bus wires from 2 to 3.3mm.
6YTTL05C	Guillotine notching plier for cables with distance between bus wires from 2 to 3.3mm and types 4 and 5 cuts.
6YTTL05D	Set of 3 guillotine notching pliers with the 3 sets of jaws.



Tool case

Contact us



ULTIMHEAT HEAT & CONTROLS



Catalogues collection on www.ultimheat.com

Electromechanical components & OEM heating sub-assemblies manufacturer

- Mechanical thermostats
- Mechanical safeties single & three poles
- ATEX thermostats & safeties
- Flow through liquid heaters
- Immersion heaters
- Heating elements for air and liquid
- Connection blocks

- Housings for corrosive environments
- Flow switches
- Level switches
- Pressure switches and air switches
- Fusible links and fire detection mechanisms
- Tracing equipment
- Taylor made solutions

