En 5





PRESSURE SWITCHES AIR SWITCHES

- For thermostats:
- Flow switches & combination controls:

See catalogues No.1 & 2

See catalogue No.6

Contact us



Summary

| Q |
|---|
| |

Section 1 Summary P1-P4 Section 2 Technical foreword to Pressure switches and Air switches P1-P10 Section 3 Table of references P1-P4 Positive pressure switches P1-P8 Low voltage circuit adjustable positive pressure switch. Quick connect terminals. Various center threads. Maximum set point value: 4 bar (0.4 Mpa, 60PSI) Р3 7Δ Minimum set point value: 10 kPa (100 mbar, 1.5 PSI) Maximum electrical rating: 1A 250VAC Low voltage circuit positive pressure switch. 1/8" center thread or 2.7 or 4mm side spout. Printed circuit or solder terminals. ZL Maximum set point value: 90 kPa (900 mbar, 13 PSI) P4-P5 Minimum set point value: 2 kPa (20 mbar, 0.29 PSI) Maximum electrical rating: 1A 250VAC Section 4 Pressure switch, single pole snap action contact. Not adjustable set point. SPDT contact. Many dimensions of fittings available Maximum set point value: 3 bar (0.3 Mpa, 43 PSI) Minimum set point value: 7 kPa (70 mbar, 1 PSI) ZQ P6 Maximum electrical rating: 22 (8)A 250VAC Single pole snap action contact pressure switch with check valve. In line assembly on 10mm soft tubes. Special for camping water supply pumps ZR **P7** Standard calibrations: 40, 80, 100 kPa (400, 800, 1000 mbar; 5.8, 11.6 and 14.5 PSI) Maximum electrical rating: 22 (8)A 250VAC Adjustable set point positive pressure switches P1-P12 Snap action contact adjustable set point positive pressure switch. IP65 waterproof. %" center threads. ZJ **P3** Maximum set point value: 2.5 bar (0.25 Mpa, 36 PSI) Minimum set point value: 7 kPa (70 mbar, 1 PSI) Maximum electrical rating: 3A 125/250 VAC Adjustable set point snap action contact miniature positive pressure switch. ½" center thread. ZZ P4 Maximum set point value: 2.5 bar (0.25 Mpa, 36 PSI) Minimum set point value: 8 kPa (80 mbar, 1.2 PSI) Maximum electrical rating: 22 (8)A 250VÁC Section 5 Single pole snap action pressure switch. Adjustable set point, quick connect terminals. 1/8" center threads. Maximum set point value: 5 bar (0.5 Mpa, 72 PSI) MA **P5** Minimum set point value: 10 kPa (100 mbar, 1.5 PSI) Maximum electrical rating: 22 (8)A 250VAC Single pole snap action pressure switch. Adjustable set point. With or without IP65 connection box, screw terminals 1/8" center thread. MB P6-P7 Maximum set point value: 5 bar (0.5 Mpa, 72 PSI) Minimum set point value: 10 kPa (100 mbar, 1.5 PSI) Maximum electrical rating: 22 (8)A 250VAC

be modified without prior advice Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can

Summary

| 4 | $\underline{\sim}$ | |
|---|--------------------|--|

| | | МС | Double pole snap action pressure switch. 2 independent adjustable set points, ¼" quick connect terminals. ½" thread. Maximum set point value: 12 bar (1.2 Mpa, 174 PSI) Minimum set point value: 30 kPa (300 mbar, 2.9 PSI) Maximum electrical rating: 22 (8)A 250VAC | P8 |
|-----------|--|---------|---|--------|
| Section 5 | | MD | Double poles snap action pressure switch. 2 independent adjustable set points. With or without IP65 connection box. ½" thread. Maximum set point value: 12 bar (1.2 Mpa, 174 PSI) Minimum set point value: 30 kPa (300 mbar, 2.9 PSI) Maximum electrical rating: 22 (8)A 250VAC | P9-P10 |
| | | MN | 3 Poles pressure switch, set point adjustable by user. ½" or ½" Brass fitting. Maximum set point value: 2 bar (0.2 Mpa, 29 PSI) Minimum set point value: 5 kPa (50 mbar, 0.7 PSI) Maximum electrical rating: 3 × 22 (8)A 250VAC | P11 |
| | Vacu | um pres | sure switches with PA66 fitting | P1-P8 |
| | | ZD | Low voltage circuit vacuum pressure switch. ½" center thread or 2.7 or 4mm side spout. Printed circuit or solder terminals. Lowest negative pressure: -90 kPa (-900 mbar, -13 PSI) Minimum set point value: -1 kPa (-10 mbar, -0.15 PSI) Maximum electrical rating: 1A 250VAC | P3-P4 |
| | | ZU | Snap action contact adjustable set point vacuum pressure switch, 1/8" center thread. Lowest negative pressure: -90 kPa (-900 mbar, -13 PSI) Minimum set point value: -5 kPa (-50 mbar, -0.7 PSI) Maximum electrical rating: 22 (8)A 250VAC | P5 |
| Section 6 | O C SW | ZS | Vacuum switch, single pole snap action contact. Not adjustable set point. 1/8" center thread Lowest negative pressure: -90 kPa (-900 mbar, -13 PSI) Minimum set point value: -2 kPa (-20 mbar, -0.3 PSI) Maximum electrical rating: 22 (8)A 250VAC | P6 |
| | Control of the contro | ZX | Snap action contact adjustable set point vacuum pressure switch. IP65 waterproof. %" center thread. Lowest negative pressure: -90 kPa (-900 mbar, -13 PSI) Minimum set point value: -5 kPa (-50 mbar, -0.7 PSI) Maximum electrical rating: 3A 125/250 VAC | P7 |
| | | Differe | ential pressure switches | P1-P4 |
| Section 7 | | ZH | Low voltage circuit differential pressure switch, printed circuit terminals, 4mm spouts. Maximum set point value: ±90 kPa(±900 mbar, ±13 PSI) Minimum set point value: ±1 kPa (±10 mbar, ±0.15 PSI) Maximum electrical rating: 1A 250VAC | P3 |
| Section / | | ZC | Low voltage circuit, IP65 waterproof differential pressure switch, various center threads. Maximum set point value: 4 bar (0.4 Mpa, 60 PSI) Minimum set point value: 10 kPa (100 mbar, 1.5 PSI) Maximum electrical rating: 1A 250VAC | P4 |





| vice | | Air switches for spas and swimming pools (latching or momentary action) | | | | | |
|---|----------------------------|---|--|--|--|--------------|--|
| ithout prior ad | | | ZG | or solder te bracket. Dia | ringle pole air switch, for low voltage, printed circuit erminals, mounting with center ¼" thread, or backside a. 2.7 or 4mm spout electrical rating: 1A 250VAC | P3-P4 | |
| be modified w | | | ZP | Single pole air switch, snap action. Center thread mouting only Momentary or latching action. Maximum electrical rating: 22 (8)A 250VAC | | P5-P6 | |
| nce only and can | Section 8 | | ZK | or surface r Dia. 2.7 or 4 High sensiv | n, single pole air switch, center ¼" thread mounting, mounting with side spout 4mm spout. ity for long distance remote control electrical rating: 22 (8)A 250VAC | P7-P8 | |
| on these data sheets are for guidance only and can be modified without prior advice | | | Snap action, double poles air switch, center ¼" thread mounting or surface mounting with side spout ZT Dia. 2.7 or 4mm spout. High sensivity for long distance remote control Maximum electrical rating: 22 (8)A 250VAC | | nounting with side spout 4mm spout. ity for long distance remote control | P9-P10 | |
| uo pa | Air buttons and air pedals | | | | | P1-P6 | |
| eatures use | | | | 66ZM5 | Air buttons (Hand air transmitters), for hot tubs, spas and swimming pools | P3 | |
| our products, drawings, descriptions, features used | Section 9 | | | 66ZMD7 | Foot air pedals, with or without mechanical protection. | P4 | |
| provement of our p | | | | 66ZSE | Pneumatic control kits for machine tools, kitchen sink crushers, swimjet pumps, underwater lighting. | P5-P6 | |
| ent in | | | | Accessori | ies | P1-P6 | |
| Because of permanent improvement of | Section 10 | | \ | Z6 | Nuts and tube securing nuts ½" NPSM and 9/16-18 UNC, 6 × 3mm and 3 × 1.5mm PVC tubes. ½ to dia. 4mm spout conversion fittings | P3-P6 | |
| _ | | | | | Undated | 1 2023/11/07 | |








Contact us www.ultimheat.com Cat5-4-2-1




JPCI Controls (and later its Ultimheat brand) was founded in China by a French investor in 1999, and is still today a 100% French family business. Its first pressure switches were manufactured in France in 1955 by engineer Lucien Lieubray. The manufacture of pneumatic switches called "Air Switches" began in France at JPC in 1996.

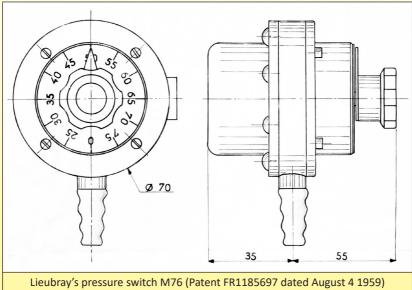

JPCI Controls (and later its brand name Ultimheat) was founded in China by a French investor in 1999, and is still now a 100% French family owned company. It started to manufacture air switches in France in 1996. It is managed by French engineers, ISO9000 and ISO14000 certified, and has been awarded as a High Technology Company by the Chinese government. In 2022, it has more than 300 workers on a 20.000 square meters modern manufacturing building. More than 85% of its production are exported to Asia, USA and Europe. Innovative engineering, top occidental level quality and manufacturing automation are the key word of its development worldwide. We are vertically integrated, including technical plastic molding and elastomeric membranes pressing. The JPCI Ultimheat testing laboratory is UL (USA) and TUV (Europe) certified upon the standard number ISO/IEC 17025:2017 (General requirements for the competence of testing and calibration laboratories).

Don't hesitate to contact us for new developments. We don't make copies, nor patents infringements, but only genuine products, and on request, we do sign confidential development agreement with our customers. Ask for our company presentation video to know more about us.

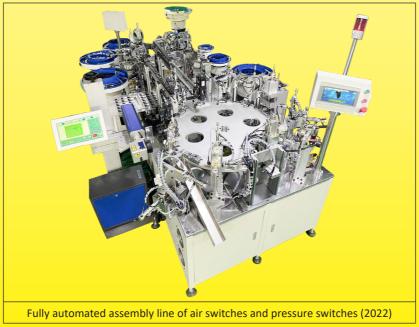

All the products in this catalog are protected by numerous patents and their models are registered




Pressure switches main operating principles

The pressure switches of this catalogue are made to the flexible elastomeric membrane technology.

The pressure applied deforms the membrane which then actuates an electrical contact. A counter-pressure system, which force is provided either by the contact system itself or by a spring, is applied to the membrane to adjust the set point.

The assembly is designed to withstand a maximum pressure of about 5 time the maximum set point value

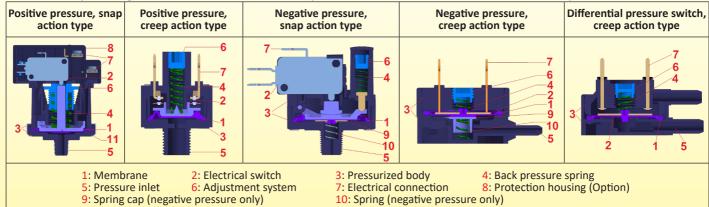



Description of the different components of pressure switches

1: The membrane

- The membrane area: to a given pressure, the larger the membrane area, the greater the force with which the membrane pushes the contact system.
- The membrane flexibility: it is essential for the realization of switches that are measuring low pressures below 10 kPa (100 mbar, 1.45 PSI). Elastomers used must be flexible and resilient. In general, the lower the pressure to be, the more flexible the membrane must be for fine for good sensitivity.
- The membrane thickness: the thin membranes cannot withstand high pressures. The thickness of the membrane will be optimized to give the best sensitivity while resisting the maximum pressure to which it may be subjected in operation. The maximum pressure limit can vary from 5 kPa (50 mbar, 0.73 PSI) to 200 kPa (2000 mbar, 29 PSI) depending on the models and thicknesses.
- The temperature resistance of the membrane:

Compared to metal diaphragms, elastomeric membrane have the advantage of flexibility, allowing the use for low pressure measurements. Elastomers are still limited by their temperature (usually not more than 85°C (185°F) in constant temperature), although it is possible, under certain conditions to use silicone membranes that offer greater thermal resistances (up to 125°C (257°F) or more).

- The chemical resistance of the membrane: The type of elastomer must be compatible with the nature of the fluid or liquid with which the membrane comes into contact. In addition, it must not harden or crack over time. The gas or liquids in contact with the membrane can have a corrosive or destructive effect on short, medium or long term on it, eg ozone, chlorine and its compounds, bromine and its compounds. The chemical composition of the membrane and how it is vulcanized or molded are the parameters that will influence this resistance.
- Contact with drinking water: In some applications, when the float is in contact with drinking water, health standards are added, which regulate the chemical composition. The highest standards known, that are used as a normative reference in many countries are those issued by the FDA (Food and Drug Administration, USA) and the WRC (water research council, GB). These standards provide particularly maximum permissible surface in contact with water and the maximum temperature at which the plastic may be exposed without harmful compounds are released into the water. The WRC also tests elastomers to ensure that they do not facilitate the spread of bacteria

2: Electrical contacts

A certain force is required to actuate the electrical contact device. It can range from a few grams for systems with creep action contacts, to several hundred grams for snap action micro-switches.

In general, the force required to operate an electrical contact increases with its electrical rating.

Creep action contacts

In apparatus slow breaking both sides deviate slowly at speeds of the order of 1/10 mm per second.

In the normal atmosphere, then occurs when the contacts are close together, an electrical arc.

The length of this arc is a function of voltage.

For voltages up to 24V DC or 110V AC, the duration of this arc is short, less than 0.1s.

For higher voltages, the arc lasts much longer, producing premature fusion of the contact, and many radio interference. This is why it is not recommended, despite the mechanical advantages (simplicity, low cost, high precision) to use this contact in 230V networks to control multiple cycling applications.

Disadvantages of creep action contacts:

- Do not allow to cut high amperages due to the large arcs (and the radio interference which are the consequence) that occur between the contacts when they are in close proximity to each other. As electric arcs increase with voltage, they are generally not used for voltages above 24V.
- There are no slow break pressure switches with a changeover contact, they are usually designed to close the contact when the pressure rises (normally open contact NO), but some models are available with a contact which opens with increasing pressure (normally close contact, NC).

Advantages of creep action contacts:

- Inexpensive
- Low operating force allowing the use for low pressure values.
- Low differential values between high and low pressure switching levels.
- Easy and inexpensive making of gold-plated contacts for use in low voltage.

Snap action contacts

On snap action switches, the contact opening speed is around 1 m per second (100.000 faster).

The contact spacing reaches the distance to extinguish the arcing in less than 1/1000 sec. Therefore there is no radio interference, and the contact does not deteriorate. Mechanically, this type of contact, also called "energy storing contact" is much more complicated, expensive, and does not allow such a great control than reed switches.

The snap action micro switch is particularly suitable for devices operating at 240 or 400 V.

Disadvantages of snap action contacts:

- Expensive
- Large actuating force limiting their use in low pressure or requesting the use of large diameter membranes Large differential travel on the switch, affecting the accuracy of pressure control and providing important distance in high and low pressure switching levels.

Contact us www.ultimheat.com Cat5-4-2-5



Advantages of snap action contacts:

- High ratings in 110 and 230V, up to 30A.
- NO, NC or SPDT contacts
- Snap action contacts do not generate EMC

Reason of material and plating used for contacts

The contact of a switch wears by micro vaporization at each open and close cycle. This wear is proportional to the strength and duration of the electric arc.

The most common contact material is pure or alloyed silver. Silver was chosen because it is the best conductor of heat and electricity known.

Its thermal conductivity quickly evacuates the temperature peak occurring during open and close cycles.

Its very good electrical conductivity provides very low contact resistance, usually less than 3 milli-ohms.

However it oxidizes and is gradually covered with a thin layer of silver oxide, which is not electrically conductive.

This layer is easily vaporized when the switch is used in common household voltages (240V, 300V). However, when used in low voltage (less than 12V) and very low currents (a few milli-amps), and less than 800 mW, the contact opening arc is no longer sufficient to vaporize the silver oxide layer. The solution is to plate the contact with a thin layer of gold (said gold flash) 3 to 5 microns thick, to ensure its protection.

Advantages and disadvantages of silver and silver alloy contacts

High electrical rating, mandatory use for electrical rating higher than 1A 250VAC

Oxidize and the contact resistance increases with time if they are used to cut electrical rating less than 20V and 100 mA Cannot be used in oxidizing atmosphere

Advantages and disadvantages of gold plated contacts

Cannot be used on voltages lower than 0.1 millivolt, because the contact resistance is too high.

The use on voltages higher than 30V and /or with currents above 100 mA causes vaporization of the gold flash protection. Then contact behaves like a standard silver contact

If the load is less than 30 mV and 10 mA, there is no change in the contact resistance and the electrical life becomes very important (except atmospheric contamination by hydrocarbon)

3: The pressurized body (Pressure chamber)

The pressurized body consists of two half-shells which enclose a membrane. It must meet several constraints *Pressure resistance:* The design must allow these shells to withstand the maximum pressure at which the switch will be submitted. If the switch is subjected to a pressure greater than the pressure for which it was designed, the body will deform or break.

Temperature resistance: the pressurized bodies of pressure switches of this catalogue are made of plastic. Plastic strengths decrease with temperature. Any abnormal temperature rise, out of specified limits will result in a decrease in pressure resistance.

Use in contact with drinking water: when plastic is in contact with drinking water, sanitation standards require that plastic does not release harmful chemicals into the water. The standards and accepted concentrations differ by country, but all give a maximum operating temperature of plastic materials related to temperature. If an application requires compliance of these standards, it is necessary to provide the standard to be met and the maximum water temperature at which the switch will be submitted.

Corrosion: Some disinfectants and chemicals, such as ozone and chlorine compounds used in swimming pools and whirlpools can damage some plastics. It is necessary to inform us if such conditions are encountered in the application, so that the choice of the plastic parts in contact is made wisely. In some slow-break switches, especially differential pressure switches for air, the electrical contacts are in contact with the fluid in the pressure chamber where they are located. Thus these contacts are in the presence of air from the pressure source to be measured, and therefore may be oxidized or corroded by the latter. It is important in these applications, to provide information on the quality of the air which pressure is measured.

4: The back pressure spring

We, at JPCI, always make the back pressure spring in stainless steel to withstand various environmental media encountered in applications.

When a switch is subjected to a pressure greater than that for which it was designed, the back pressure spring, or the contact mechanism will be subjected to high stresses that can cause a permanent deformation and thus, result in the set point change of the device.

5: The pressure inlet

It is achieved by a plastic thread. The most common are ½ NPT, ½ BSPT, ½ NPT, ½ BSPT. These threads are taped to provide a good water tightness

6: The adjustment system

Adjusting a pressure switch is made by a force opposed to the movement of the membrane actuating the electrical contact system. This force is produced by a spring which is more or less compressed depending on the setting value to obtain. There are three possible settings:


Cat5-4-2-6 Contact us www.ultimheat.com

2

Technical foreword to Pressure switches and Air switches



- Fixed setting: there is no adjustment possible, as the force is provided by a calibrated spring which is not reachable. This type of control is inexpensive, but with quite large setting tolerances. It is suitable for mass production.



- **Sealed setting:** the setting is provided by a screw which compresses the spring more or less. After adjustment, the screw is factory sealed. This type of setting is accurate but not accessible by the user.



 Unsealed setting: the end user can change the set point value of the point by himself, with a screw, a dial or a knob. This type of setting is for advanced users.

7: The electrical connection



Pins for printed circuits



Solder terminals for wires



Tabs



Screw terminals



Lead wires

8: The protection enclosure

The protection housing can have two functions:

- Ingress protection against attacks from the outside environment (rain, dust, shock)
- Protection against the conditions in which the product will be installed in its application.

In most cases, pressure switches will be integrated by an OEM into a machine or equipment. Then it is this machine or equipment that will ensure protection against water, dust, shock and other contaminants.

- Protection against usual external environment: These are usually plastic housings providing an IPxx (Protection against the penetration of water and dust, EN 60529 ingress protection) and an IKxx (Protection against shock, EN 50102).

Some pressure switches may receive protection by epoxy resin or polyurethane potting. The pressure switches themselves have an IP00 degree of protection as they are components to be integrated. Some safety standards require a particular degree of protection

- Protection during the welding process: special protections are required if switches are soldered on electronic circuits (pressure switches with pin terminals). The solder flux is corrosive and can penetrate by capillarity and cause the oxidation of the contacts. Their use should be limited to a minimum. Similarly, the duration and the temperature at which the pressure switch terminals are subject may, if they exceed certain limits, cause melting of the plastic body of the switch and its deterioration or change its set point.
- Protection against gas and dust explosive atmospheres: JPCI pressure switches are not designed for use in these environments and therefore do not meet the applicable standards in this field of application

Contact us www.ultimheat.com Cat5-4-2-7



Life test processes

The lifespan of an electrical contact, i.e. the number of cycles it can withstand without destruction, depends on many parameters. We can cite in particular: the voltage, the intensity, the frequency of the current, the cosine Phi, the ambient temperature, the relative humidity rate, the cycling speed, the material of the contacts, etc. For the devices of regulation, these parameters are defined by standard EN 60730.

It is important, when designing a pressure switch, to take into account the conditions in which it will be used to test and determine this lifespan. The equipment of the JPCI test laboratory makes it possible to simulate all these parameters.



Electrical life test equipment for pressure switches.

(Used for verification of compliance with applicable UL and CE standards)

The pressure switch is located in a climatic chamber whose temperature and degree of humidity can be varied. It is then connected to a load bank whose voltage, current and cosine phi are adjustable. Thousands of contact opening and closing cycles are then carried out, according to a frequency specified by the standards. This installation also makes it possible to carry out specific tests for a special customer application.

On the production line, all the devices perform several operating cycles on simplified equipment



Electrical life test equipment for air switches.

(Used for verification of compliance with applicable UL and CE standards)

The air switch is located in a climatic chamber whose temperature and humidity level can be varied. It is then connected to a load bank whose voltage, current and cosine phi are adjustable. Thousands of contact opening and closing cycles simulating the action of a pneumatic push button are then carried out, according to a frequency specified by the standards. This installation also makes it possible to carry out specific tests for a special customer application. On the production line, all the devices perform several operating cycles on simplified equipment

Pressure calibration processes

The calibration of the pressure switches is carried out with certified measuring devices, and the opening and closing parameters of the contact of each pressure switch tested are automatically recorded and linked to the batch number.

Each air switch undergoes about ten successive pressure cycles, corresponding to its sensitivity. Below is a device used on a manual assembly line. On an automated assembly line, this operation is automatic and the opening and closing parameters of the contact of each air switch are memorized and linked to the batch number.



Verification of pressure switch calibration



Checking air switch operating cycles

Cat5-4-2-8 Contact us www.ultimheat.com

2

Technical foreword to Pressure switches and Air switches

Standards and approvals

Pneumatic pressure switches and air switches are approved by UL and TUV laboratories according to the following standards:

UL: UL60730-1 and UL60730-2-6. TUV: EN60730-1 and EN60730-2-6.

Although the reference standards are almost identical, the UL tests differ from the European tests on a few points, and are much more restrictive than the old tests according to UL508 still practiced by most North American manufacturers.

Equipment and special test made on pneumatic remote controls known as "Air switches", designed, patented and manufactured by JPCI-Ultimheat

The function of the air switches is to instigate a "puff" or "sip" of air which travels along a length of PVC tubing and activates the on-off electrical signal.

Their use avoids the use of an electrical voltage between a control button and an electrical device.

The oldest use of this system was the detection of the arrival of a vehicle at gas stations: The vehicle only had to run on a pipe filled with air to activate a signal from a distance. In this way, no electric cable was located in an area made dangerous by the presence of flammable gases or fuel.

The main current applications are in balneotherapy tubs, swimming pools, sink crushers, public toilets, and showers in gymnasiums in order to have an electrically safe control button at the edge of them. The PVC tube in which the air circulates allows the air switch to be activated remotely inside the electrical device without the user coming into contact with electricity in a humid environment. This allows the user to safely activate the device with wet hands. Similar applications exist in hospitals, in particular for emergency bed buttons.

Among the critical parameters of these devices, we must first mention the need to define the best compromise between their size, their electrical rating, and the operating distance.

This compromise usually consists, for devices with snap action intended for the direct control of motors, in a membrane of about 20 mm in diameter, a 250V breaking capacity of 15A resistive or 3 4HP, and operating distances of 5 m and more with a 6 × 3 mm PVC connecting tube. This configuration works perfectly with the classic 32 mm push buttons mounted on the edge of Jacuzzis, spas, balneotherapy and swimming pools.

Influence of operating distance




Chart of pressure rise inside a 32 mm diameter air button (such as the 66ZM5 model described in this catalog)



Test equipment for measuring <u>repeatedly and constantly</u> the maximum length of the air switch connecting tubes according to the volume of the push button and the pressure it develops (Ultimheat Laboratory)

Calculation example: The push button bellows has a volume of 5.8cm³ when compressed. The instantaneous pressure of approximately 7.5 kPa (75 mbar, 1.09 PSI) provided by the push button is then diluted in the volume of air in the PVC tube. By applying Boyle-Mariotte's law, which at constant temperature, can be written as P1V1 = P2V2, it is then possible to calculate the maximum control distance using the following parameters:

- P1 and V1 being the pressure and volume of the push button alone and P2 and V2 being the pressure and volume of the push button and the PVC tube when they are interconnected.
- The interior section of the 3 \times 6 mm ($\frac{1}{8}$ " \times $\frac{1}{4}$ ") PVC tube is 0.070 cm², or 7cm³ per meter
- The minimum pressure necessary to activate a usual air switch with a 16A 250V rating is 0.6 kPa (6 mbar, 0.09 PSI) The maximum control distance (Lmax) can then be calculated by the formula $0.075 \times 5.8 = 0.006 \times (7 \times Lmax + 5.8)$.

This formula gives us Lmax = 11.3 m

This theoretical value must be moderated by the pressure drops undergone by the pressure pulse in the control circuit and any leaks due to the barometric and ambient temperature compensation system.

This distance can also be greatly increased by using tubes with a smaller internal diameter like 1.6 mm (1/16").

Influence of ambient temperature (Gay Lussac's law)

The pressure change in a gas as a function of temperature is given by Gay Lussac's law: P1/T1 = P2/T2The pressure change in the circuit is therefore directly proportional to the temperature variation and we will have: $P2 = P1 \times (T2/T1)$, with P1 = starting atmospheric pressure (i.e. approximately 1 bar or 10 kPa (100 mbar, 1.45 PSI),

Contact us www.ultimheat.com Cat5-4-2-9



P2 pressure after temperature increase and T1 starting temperature. (P1 and P2 expressed in °Kelvin). Note that this pressure increase is independent of the volume.

For example, in the case of a temperature increase of 18° C (64.4°F), we obtain P2 = 0.1 × (273.15 + 18) / 273.15 = 10.66 kPa (106.6 mbar, 1.55 PSI), i.e. a pressure increase of 0.66 kPa (6.6 mbar, 0.1 PSI), which is sufficient to actuate an air switch triggering at 0.6 kPa (6 mbar, 0.09 PSI).

This explains the untimely triggering of devices when the air switch circuit is subjected to a local rise in ambient temperature such as may be encountered in spas or swimming pools. It is therefore necessary that these air-switches

be equipped with an ambient temperature compensation system.




Chart in blue of pressure rise in a push button assembly with 9cm³ bellows, 6 × 3 mm diameter PVC tube and 5 meters long, and an air switch without temperature compensation. When the pressure switch assembly is closed at a temperature of 20°C (68°F), then when the ambient temperature reaches 34°C (93°F), the air-switch is actuated (Blue point) by the internal pressure rise without the push button having been pressed.

In red, same, but with an air switch with barometric compensation by micro-leak in the body. The air-switch is not activated because there is no rise in internal pressure



Test equipment for measuring, recording and setting the barometric and the ambient temperature compensation systems of the air switches (Ultimheat Laboratory)

Influence of atmospheric pressure

A drop in atmospheric pressure due to cloudy or rainy weather can also cause unwanted tripping, because the pressure difference between the pneumatic control circuit and its environment is then equivalent to an increase in internal pressure. At sea level, the average atmospheric pressure is 10.13 kPa (101.3 mbar, 1.47 PSI). Meteorologically speaking, we speak of depression when the pressure drops below 10.1 kPa (101 mbar, 1.46 PSI), but values below 10.06 kPa (100.6 mbar, 1.46 PSI) are usual, and combined with an increase in temperature, are sufficient to trigger an air-switch without compensation of atmospheric pressure.

Influence of vibrations

Improper design can make an air switch sensitive to vibrations during transport, by switching its contact from an off position to an on position.

It is also necessary to optimize the slow-breaking pressure switch models in order to limit their sensitivity to vibration and shock.



Test equipment to measure the vibration resistance of air switches and slow-action contact of pressure switches by simulation of transport conditions (Ultimheat Laboratory)

Cat5-4-2-10 Contact us www.ultimheat.com

2

Alphabetical and reference tables

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Contact us www.ultimheat.com Cat5-4-3-1





Alphabetical and reference tables

| advice | References list | References list | References list | References list | References list |
|--------------------------|------------------|------------------|------------------|--------------------------------------|------------------|
| | 66RRA1026S418G00 | MB10U845LP400800 | MD21T845QP7V9000 | Z6VE10003500008A | ZC2X28EA08000000 |
| without prior | 66RRA1252343G81A | MB10U845LP40080A | MD21T845QP7V900E | Z6VE10003500008A | ZC2X28EG01000000 |
| out | 66RRA1343248G81A | MB10U845LP40080B | MD21T845QP7V900F | Z6VE1000350003A | ZC2X28EG02000000 |
| ۸ith | 66RRA140G143G81A | MB10U845LP405000 | MD21T845RP7V0600 | Z6VE1000350007A | ZC2X28EG04000000 |
| ed \ | 66RRA1424050G81A | MB10U845LP40500A | MD21T845RP7V060E | ZA2X28EA01000000 | ZC2X28EG06000000 |
| modified | 66RRA147G448G81A | MB10U845LP40500B | MD21T845RP7V060F | ZA2X28EA02000000 | ZC2X28EG08000000 |
| B B | 66RRA155G250G81A | MC21T845PP7V0600 | MD21T845RP7V1200 | ZA2X28EA04000000 | ZC2X2GEA01000000 |
| - pe | 66ZM500060400000 | MC21T845PP7V1200 | MD21T845RP7V120E | ZA2X28EA06000000 | ZC2X2GEA02000000 |
| can | 66ZM500060410000 | MC21T845PP7V3000 | MD21T845RP7V120F | ZA2X28EA08000000 | ZC2X2GEA04000000 |
| and | 66ZM500060500000 | MC21T845PP7V5000 | MD21T845RP7V3000 | ZA2X28EG01000000 | ZC2X2GEA06000000 |
| ک کے | 66ZM500060510000 | MC21T845PP7V9000 | MD21T845RP7V300E | ZA2X28EG02000000 | ZC2X2GEA08000000 |
| e 01 | 66ZM500060700000 | MC21T845QP7V0600 | MD21T845RP7V300F | ZA2X28EG04000000 | ZC2X2GEG01000000 |
| anc | 66ZM500060710000 | MC21T845QP7V1200 | MD21T845RP7V5000 | ZA2X28EG06000000 | ZC2X2GEG02000000 |
| guid | 66ZMD70383S00000 | MC21T845QP7V3000 | MD21T845RP7V500E | ZA2X28EG08000000 | ZC2X2GEG04000000 |
| for guidance only | 66ZMD70383S10000 | MC21T845QP7V5000 | MD21T845RP7V500F | ZA2X2GEA01000000 | ZC2X2GEG06000000 |
| are f | 66ZSEFPS02000 | MC21T845QP7V9000 | MD21T845RP7V9000 | ZA2X2GEA01000000 | ZC2X2GEG08000000 |
| ts a | 66ZSEFPS04000 | MC21T845RP7V0600 | MD21T845RP7V900E | ZA2X2GEA04000000 | ZC2X2MEA01000000 |
| sheets | 66ZSEFPS06000 | MC21T845RP7V1200 | MD21T845RP7V900F | ZA2X2GEA06000000 | ZC2X2MEA02000000 |
| ta s | 66ZSEFPS10000 | MC21T845RP7V3000 | MN30U5403040D200 | ZA2X2GEA08000000 | ZC2X2MEA04000000 |
| e data | 66ZSEHBC02000 | MC21T845RP7V5000 | MN30U5403040D400 | ZA2X2GEG01000000 | ZC2X2MEA06000000 |
| on these | 66ZSEHBC04000 | MC21T845RP7V9000 | MN30U5403040D600 | ZA2X2GEG02000000 | ZC2X2MEA08000000 |
| n th | 66ZSEHBC06000 | MD21T845PP7V0600 | MN30U5403040D800 | ZA2X2GEG04000000 | ZC2X2MEG01000000 |
| o pa | MA10U847HP410200 | MD21T845PP7V060E | MN30U5403040DA00 | ZA2X2GEG06000000 | ZC2X2MEG02000000 |
| nsed | MA10U847LP410200 | MD21T845PP7V060F | MN30U5403040DA20 | ZA2X2GEG08000000 | ZC2X2MEG04000000 |
| features | MA10U847HP410350 | MD21T845PP7V1200 | MN30U540H040D200 | ZA2X2MEA01000000 | ZC2X2MEG06000000 |
| eatı | MA10U847LP410350 | MD21T845PP7V120E | MN30U540H040D400 | ZA2X2MEA02000000 | ZC2X2MEG08000000 |
| | MA10U847HP410800 | MD21T845PP7V120F | MN30U540H040D600 | ZA2X2MEA04000000 | ZC2X2TEA01000000 |
| escriptions, | MA10U847LP410800 | MD21T845PP7V3000 | MN30U540H040D800 | ZA2X2MEA06000000 | ZC2X2TEA02000000 |
| crip | MA10U847HP415000 | MD21T845PP7V300E | MN30U540H040DA00 | ZA2X2MEA08000000 | ZC2X2TEA04000000 |
| des | MA10U847LP415000 | MD21T845PP7V300F | MN30U540H040DA20 | ZA2X2MEG01000000 | ZC2X2TEA06000000 |
| gs, | MB10U845HP400100 | MD21T845PP7V5000 | MN30U540L040D200 | ZA2X2MEG02000000 | ZC2X2TEA08000000 |
| drawings, | MB10U845HP40010A | MD21T845PP7V500E | MN30U540L040D400 | ZA2X2MEG04000000 | ZC2X2TEG01000000 |
| | MB10U845HP40010B | MD21T845PP7V500F | MN30U540L040D600 | ZA2X2MEG06000000 | ZC2X2TEG02000000 |
| our products, | MB10U845HP400350 | MD21T845PP7V9000 | MN30U540L040D800 | ZA2X2MEG08000000 | ZC2X2TEG04000000 |
| npo | MB10U845HP40035A | MD21T845PP7V900E | MN30U540L040DA00 | ZA2X2TEA01000000 | ZC2X2TEG06000000 |
| r pr | MB10U845HP40035B | MD21T845PP7V900F | MN30U540L040DA20 | ZA2X2TEA02000000 | ZC2X2TEG08000000 |
| no | MB10U845HP400800 | MD21T845QP7V0600 | Z6TU3C0000000000 | ZA2X2TEA04000000 | ZD2X02R14010000V |
| t of | MB10U845HP40080A | MD21T845QP7V060E | Z6TU700000000000 | ZA2X2TEA06000000 | ZD2X02R14025000V |
| neu | MB10U845HP40080B | MD21T845QP7V060F | Z6VE10003500003A | ZA2X2TEA08000000 | ZD2X02R14050000V |
| permanent improvement of | MB10U845HP405000 | MD21T845QP7V1200 | Z6VE10003500003A | ZA2X2TEG01000000 | ZD2X02RG4010000V |
| brc | MB10U845HP40500A | MD21T845QP7V120E | Z6VE10003500003A | ZA2X2TEG01000000 | ZD2X02RG4025000V |
| ıt in | MB10U845HP40500B | MD21T845QP7V120F | Z6VE10003500006A | ZA2X2TEG04000000 | ZD2X02RG4050000V |
| nen | MB10U845LP400100 | MD21T845QP7V3000 | Z6VE10003500006A | ZA2X2TEG06000000 | ZD2X0BR14010000V |
| rma | MB10U845LP40010A | MD21T845QP7V300E | Z6VE10003500006A | ZA2X2TEG08000000 ZC2X28EA01000000 | ZD2X0BR14025000V |
| per | MB10U845LP40010B | MD21T845QP7V300F | Z6VE10003500006A | ZC2X28EA01000000 | ZD2X0BR14050000V |
| e of | MB10U845LP400350 | MD21T845QP7V5000 | Z6VE10003500006A | ZC2X28EA02000000 | ZD2X0BRG4010000V |
| 3ecause | MB10U845LP40035A | MD21T845QP7V500E | Z6VE10003500006A | ZC2X28EA04000000 | ZD2X0BRG4025000V |
| Sec | MB10U845LP40035B | MD21T845QP7V500F | Z6VE10003500007A | ZC2X28EA06000000 | ZD2X0BRG4050000V |

Contact us www.ultimheat.com Cat5-4-3-3

Alphabetical and reference tables

| References list |
|------------------|------------------|------------------|------------------|------------------|
| ZD2X0PR140100000 | ZK1720U600000005 | ZP1021U500000006 | ZP272WU600000000 | ZT1520U12L000005 |
| ZD2X0PR140250000 | ZK1720U600000006 | ZP1021U500000007 | ZP272WU600000008 | ZT1520U12L000006 |
| ZD2X0PR140500000 | ZK1720U600000007 | ZP102UU500000000 | ZP272WU600000009 | ZT1520U12L000007 |
| ZD2X0PRG40100000 | ZK1722U600000000 | ZP102UU500000004 | ZP272WU600000009 | ZT1522U12L000000 |
| ZD2X0PRG40250000 | ZK2520U100000000 | ZP102UU500000008 | ZQ2038U502000000 | ZT152BU12L000000 |
| ZD2X0PRG40500000 | ZK2520U100000005 | ZP102UU500000009 | ZQ2038U504000000 | ZT1720U62L000000 |
| ZD2X0SR140100000 | ZK2520U100000006 | ZP102WU500000000 | ZQ2038U506000000 | ZT1720U62L000005 |
| ZD2X0SR140250000 | ZK2520U100000007 | ZP102WU500000008 | ZQ2038U508000000 | ZT1720U62L000006 |
| ZD2X0SR140500000 | ZK2522U100000000 | ZP102WU500000009 | ZQ2038U50A000000 | ZT1720U62L000007 |
| ZD2X0SRG40100000 | ZK252BU100000000 | ZP102WU500000009 | ZQ2038U50A200000 | ZT1722U62L000000 |
| ZD2X0SRG40250000 | ZK252BU100000000 | ZP1721U600000000 | ZQ203GU502000000 | ZT172BU62L000000 |
| ZD2X0SRG40500000 | ZK2720U600000000 | ZP1721U600000005 | ZQ203GU504000000 | ZT2520U12L000000 |
| ZG2X20F145000000 | ZK2720U600000005 | ZP1721U600000006 | ZQ203GU506000000 | ZT2520U12L000005 |
| ZG2X20F145000005 | ZK2720U600000006 | ZP1721U600000007 | ZQ203GU508000000 | ZT2520U12L000006 |
| ZG2X20F145000006 | ZK2720U600000007 | ZP172UU600000000 | ZQ203GU50A000000 | ZT2520U12L000007 |
| ZG2X20F145000007 | ZK2722U600000000 | ZP172UU600000004 | ZQ203GU50A200000 | ZT2522U12L000000 |
| ZG2X20F14A000000 | ZK272BU600000000 | ZP172UU600000008 | ZQ203MU502000000 | ZT252BU12L000000 |
| ZG2X20F14A000005 | ZK272BU600000000 | ZP172UU600000009 | ZQ203MU504000000 | ZT2720U62L000000 |
| ZG2X20F14A000006 | ZL2X0GQ140000100 | ZP172WU600000000 | ZQ203MU506000000 | ZT2720U62L000005 |
| ZG2X20F14A000007 | ZL2X0SQ140000100 | ZP172WU600000008 | ZQ203MU508000000 | ZT2720U62L000006 |
| ZG2X23F145000000 | ZL2X02Q14000010V | ZP172WU600000009 | ZQ203MU50A000000 | ZT2720U62L000007 |
| ZG2X23F14A000000 | ZL2X0BQ14000010V | ZP172WU600000009 | ZQ203MU50A200000 | ZT2722U62L000000 |
| ZG2X2CF145000000 | ZL2X0GQ140000250 | ZP2021U500000000 | ZQ203TU502000000 | ZT272BU62L000000 |
| ZG2X2CF14A000000 | ZL2X0SQ140000250 | ZP2021U500000005 | ZQ203TU504000000 | ZU253ZU1Z0100000 |
| ZH2X25T105000000 | ZL2X02Q14000025V | ZP2021U500000006 | ZQ203TU506000000 | ZU253ZU1Z0250000 |
| ZH2X25T10A000000 | ZL2X0BQ14000025V | ZP2021U500000007 | ZQ203TU508000000 | ZU253ZU1Z0500000 |
| ZH2X25T10B000000 | ZL2X0GQ140000500 | ZP202UU500000000 | ZQ203TU50A000000 | ZU253VU1Z0100000 |
| ZH2X25T10D000000 | ZL2X0SQ140000500 | ZP202UU500000004 | ZQ203TU50A200000 | ZU253VU1Z0250000 |
| ZH2X25TG05000000 | ZL2X02Q14000050V | ZP202UU500000008 | ZR202XU5YD000000 | ZU253VU1Z0500000 |
| ZH2X25TG0A000000 | ZL2X0BQ14000050V | ZP202UU500000008 | ZR202XU5YH000000 | ZU273ZU6Z0100000 |
| ZH2X25TG0B000000 | ZL2X0GQG40000100 | ZP202UU500000009 | ZR202XU5YJ000000 | ZU273ZU6Z0250000 |
| ZH2X25TG0D000000 | ZL2X0SQG40000100 | ZP202WU500000000 | ZS2038U500100000 | ZU273ZU6Z0500000 |
| ZJ203VM1Z020000E | ZL2X02QG4000010V | ZP202WU500000008 | ZS2038U500200000 | ZU273VU6Z0100000 |
| ZJ203ZM1Z020000E | ZL2X0BQG4000010V | ZP202WU500000009 | ZS2038U500300000 | ZU273VU6Z0250000 |
| ZJ203VM1Z020000J | ZL2X0GQG40000250 | ZP202WU500000009 | ZS203GU500100000 | ZU273VU6Z0500000 |
| ZJ203ZM1Z020000J | ZL2X0SQG40000250 | ZP2721U600000000 | ZS203GU500200000 | ZX203VM1Z000000E |
| ZJ203VM1Z020000T | ZL2X02QG4000025V | ZP2721U600000005 | ZS203GU500300000 | ZX203VM1Z000000J |
| ZJ203ZM1Z020000T | ZL2X0BQG4000025V | ZP2721U600000006 | ZS278U6001000000 | ZX203VM1Z000000T |
| ZK1020U500000000 | ZL2X0GQG40000500 | ZP2721U600000007 | ZS278U6002000000 | ZX203ZM1Z000000E |
| ZK1020U500000005 | ZL2X0SQG40000500 | ZP272UU600000000 | ZS278U6003000000 | ZX203ZM1Z000000J |
| ZK1020U500000006 | ZL2X02QG4000050V | ZP272UU600000004 | ZS27GU6001000000 | ZX203ZM1Z000000T |
| ZK1020U500000007 | ZL2X0BQG4000050V | ZP272UU600000008 | ZS27GU6002000000 | ZZ273VU6X0000200 |
| ZK1022U500000000 | ZP1021U500000000 | ZP272UU600000008 | ZS27GU6003000000 | ZZ273ZU6X0000200 |
| ZK1720U600000000 | ZP1021U500000005 | ZP272UU600000009 | ZT1520U12L000000 | |

www.ultimheat.com



Positive pressure switches

Contact us www.ultimheat.com Cat5-4-4-1




on these data sheets are for guidance only and can be modified without prior advice

Because of permanent improvement of our

Positive pressure switches

Low voltage circuit adjustable positive pressure switch. Quick connect terminals. Various center threads.

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|---------|---------------------------|--------------------------------|----------------------------|------|
| PA66 | SPNO, 1A 250VAC | 10 kPa (100 mbar, 1.5 PSI). | 4 bar (0.4 Mpa, 60 PSI) | ZA |

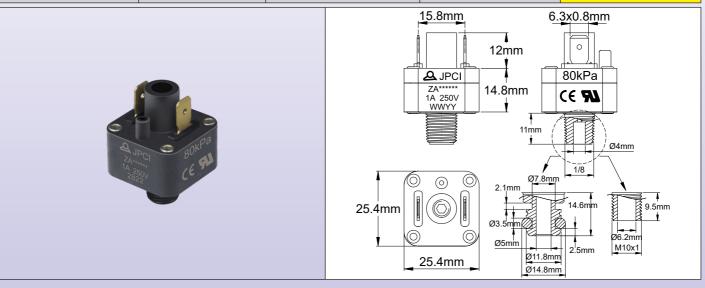

Main applications:

Minimum water pressure detection on water heaters and boilers. This pressure switch is much more sensitive than snap-action systems and can be calibrated at lower pressures, but its use is limited to low power applications, typically on electronic circuits. Very low differential, less than 1 kPa (10 millibars, 0.15 PSI).

Membranes: Silicone, dia. 22mm.

Fluid: Water or air Fitting: PA66

Housing: PA66, UL94 VO

Contact: Single pole normally open, slow make and break.

Electrical rating:

- Silver contact: max 1A 250VAC

- Gold plated contact: max 100mA, 24VDC **Action:** Momentary, close on pressure rise.

Set point calibration: Factory calibrated and sealed, not field adjustable **Set point calibration limits:** From 0.1 to 4 bar (0.01 to 0.4 Mpa, 1.5 to 60 PSI)

Electrical connection: 6.35 × 0.8mm guick connect terminals

Bursting pressure: > 16 bar (1.6Mpa, 232PSI)

Ambient temperature limits: water: 0 to 85°C (32 to 185°F), Air: -10 ~ 85°C (14° to 185°F).

Maximum calibration value: 4 bar (0.4 Mpa, 60 PSI).

Parts numbers:

| Pressure | Contact | Calibration | | | | | |
|-----------|-------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|--|
| port | | 10 kPa (100 mbar, 1.5 PSI) | 20 kPa (200 mbar, 2.9 PSI) | 40 kPa (400 mbar, 5.8 PSI) | 60 kPa (600 mbar, 8.7 PSI) | 80 kPa (800 mbar, 11.6 PSI) | |
| 1/8" NPT | Silver | ZA2X28EA01000000 | ZA2X28EA02000000 | ZA2X28EA04000000 | ZA2X28EA06000000 | ZA2X28EA08000000 | |
| 78 INPT | Gold plated | ZA2X28EG01000000 | ZA2X28EG02000000 | ZA2X28EG04000000 | ZA2X28EG06000000 | ZA2X28EG08000000 | |
| 1/8" BSPT | Silver | ZA2X2GEA01000000 | ZA2X2GEA02000000 | ZA2X2GEA04000000 | ZA2X2GEA06000000 | ZA2X2GEA08000000 | |
| /8 D3F1 | Gold plated | ZA2X2GEG01000000 | ZA2X2GEG02000000 | ZA2X2GEG04000000 | ZA2X2GEG06000000 | ZA2X2GEG08000000 | |
| M10x1 | Silver | ZA2X2MEA01000000 | ZA2X2MEA02000000 | ZA2X2MEA04000000 | ZA2X2MEA06000000 | ZA2X2MEA08000000 | |
| IVIIOXI | Gold plated | ZA2X2MEG01000000 | ZA2X2MEG02000000 | ZA2X2MEG04000000 | ZA2X2MEG06000000 | ZA2X2MEG08000000 | |
| Snap-in | Silver | ZA2X2TEA01000000 | ZA2X2TEA02000000 | ZA2X2TEA04000000 | ZA2X2TEA06000000 | ZA2X2TEA08000000 | |
| Зпар-п | Gold plated | ZA2X2TEG01000000 | ZA2X2TEG02000000 | ZA2X2TEG04000000 | ZA2X2TEG06000000 | ZA2X2TEG08000000 | |


Contact us www.ultimheat.com Cat5-4-4-3

Positive pressure switches

2

Low voltage circuit positive pressure switch

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|---------|---------------------------|------------------------------|------------------------------|------|
| PA66 | 1A 250VAC | 2 kPa (20 mbar, 0.29 PSI) | 90 kPa (900 mbar, 13 PSI) | ZL |

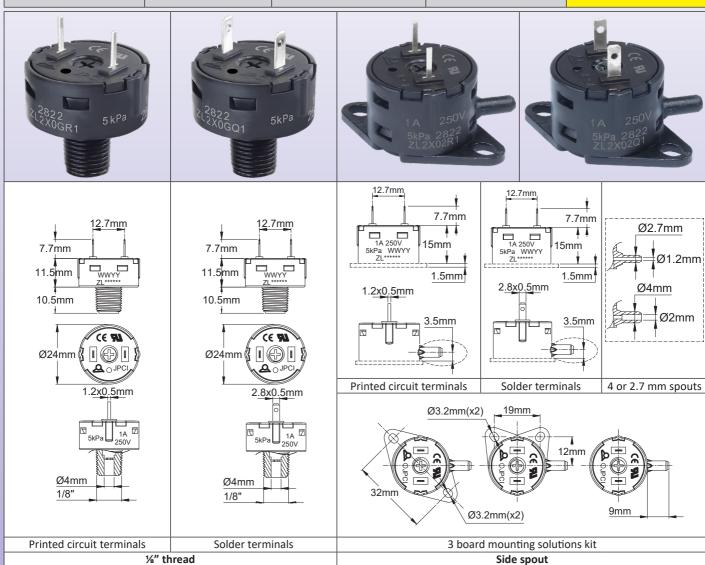

Main applications:

These miniature slow-action pressure switches greatly outperform snap action models because they have high sensivity and low differential. They are designed to be incorporated into a printed circuit board which provides power relay. Their reduced thickness of 15mm favors installation in applications requiring a small footprint.

Technical features:

Fluid: Air or water

Pressure port connection: 1/8" BSPT, 1/8" NPT or side spout

- For 1/8" (3mm) ID flexible plastic tubing - For 1/16" (1.5 mm) ID flexible plastic tubing Maximum PVC tube hardness 70 shore A **Membrane:** Silicone, 22mm diameter.

Housing: PA66

Contact: Slow make and break, contact is open when no pressure and closes when pressure increases.

Electrical rating: 1A 250VAC resistive (silver contacts), 10mA 24VDC (5 microns gold plated contacts). We recommend gold plated contacts for low voltage and low current circuits to avoid the increase in contact resistance that appears on silver contacts as they oxidize.

Action: Momentary

Cat5-4-4 Contact us www.ultimheat.com





Electrical connection: 2.8 × 0.5mm quick connect terminals or printed circuit pins 1.2mm × 0.5mm

Maximum operating pressure: 90 kPa (900 mbar, 13 PSI)

Bursting pressure: > 4bar (0.4Mpa, 60PSI)

Ambient temperature limits: Air: -10 ~ 85°C (14 to 185°F). Water: 0 to 85°C (32 to 185°F).

Mounting fittings: 1/8" BSPT or 1/8" NPT or side spout.

Main part numbers with quick connection terminals and silver contacts*

| Pressure port fitting | Included accessories | Calibration at 10 kPa (100 mbar, 1.45 PSI) | Calibration at 25 kPa (250 mbar, 3.63 PSI) | Calibration at 50 kPa (500 mbar, 7.25 PSI) |
|--|---|---|---|---|
| 1/2"BSPT | None | ZL2X0GQ140000100 | ZL2X0GQ140000250 | ZL2X0GQ140000500 |
| 1/8"NPT | None | ZL2X0SQ140000100 | ZL2X0SQ140000250 | ZL2X0SQ140000500 |
| Spout on the side for 1/8" (6 × 3mm) tube | One set of 2 different snap-on brackets | ZL2X02Q14000010V | ZL2X02Q14000025V | ZL2X02Q14000050V |
| Spout on the side for $\frac{1}{6}$ " (3 × 1.5mm) tube | One set of 2 different snap-on brackets | ZL2X0BQ14000010V | ZL2X0BQ14000025V | ZL2X0BQ14000050V |

^{*} For printed circuit pin, replace Q1 by R1 in the 7th and 8th character.

Main part numbers with quick connection terminals and gold contacts*


| Pressure port fitting | Included accessories | Calibration at 10 kPa (100 mbar, 1.45 PSI) | Calibration at 25 kPa (250 mbar, 3.63 PSI) | Calibration at 50 kPa (500 mbar, 7.25 PSI) |
|--|---|---|---|---|
| ⅓"BSPT | None | ZL2X0GQG40000100 | ZL2X0GQG40000250 | ZL2X0GQG40000500 |
| %"NPT | None | ZL2X0SQG40000100 | ZL2X0SQG40000250 | ZL2X0SQG40000500 |
| Spout on the side for 1/8" (6 × 3mm) tube | One set of 2 different snap-on brackets | ZL2X02QG4000010V | ZL2X02QG4000025V | ZL2X02QG4000050V |
| Spout on the side for $\frac{1}{6}$ " (3 × 1.5mm) tube | One set of 2 different snap-on brackets | ZL2X0BQG4000010V | ZL2X0BQG4000025V | ZL2X0BQG4000050V |

^{*} For printed circuit pin, replace QG by RG in the 7th and 8th character.

Positive pressure switches

Pressure switch, single pole snap action contact. Not adjustable set point. SPDT contact. Many dimensions of fittings available

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|---------|---------------------------|------------------------------|----------------------------|------|
| PA66 | SPDT, 16A 250VAC | 7 kPa (70 mbar, 1 PSI). | 3 bar (0.3 Mpa, 43 PSI) | ZQ |

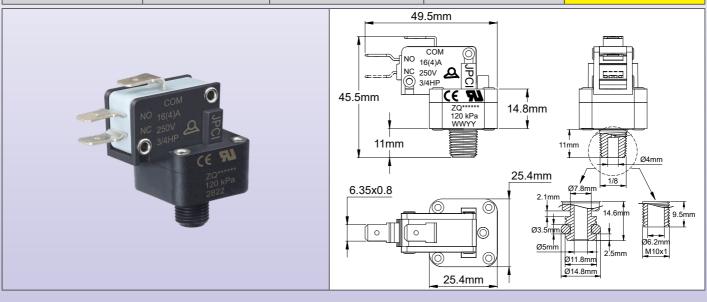

Main applications:

Minimum water pressure detection on water heaters, boilers; balneotherapy, jacuzzi and swimming pool heaters, detection of clogging of swimming pool filters and other household electrical applications.

Membranes: EPDM, dia. 22mm. Silicone on request

Fluid: Water or air Fitting: PA66

Housing: PA66, UL94 VO Contact: SPDT, snap action

Electrical rating: 16 (4)A 125/250VAC; ½HP 125VAC; ¾HP 250VAC. (Available up to 22 (8)A 250VAC, 2HP 250VAC)

Action: Momentary

Set point calibration: Factory calibrated and sealed, not field adjustable **Set point calibration limits:** From 7 to 300 kPa (70 to 3000 mbar, 1 to 43 PSI)

Electrical connection: 6.35 × 0.8mm quick connect terminals

Bursting pressure: >15 bar (1.5 Mpa, 217 PSI)

Ambient temperature limits: water: 0 to 85°C (32 to 185°F), Air: -10 ~ 85°C (14° to 185°F)

Maximum calibration value: 3 bar (0.3 Mpa, 43 PSI)

Approval: UL 508

Parts numbers:

| Droccuro | Calibration | | | | | | |
|------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|------------------------------|---------------------------------|--|
| Pressure port | 20 kPa (200 mbar, 2.9 PSI) | 40 kPa (400 mbar, 5.8 PSI) | 60 kPa (600 mbar, 8.7 PSI) | 80 kPa (800 mbar, 11.6 PSI) | 1 bar (0.1 Mpa, 14.5 PSI) | 1.2 bar (0.12 Mpa, 17.4 PSI) | |
| 1/8" NPT | ZQ2038U502000000 | ZQ2038U504000000 | ZQ2038U506000000 | ZQ2038U508000000 | ZQ2038U50A000000 | ZQ2038U50A200000 | |
| 1/8" BSPT | ZQ203GU502000000 | ZQ203GU504000000 | ZQ203GU506000000 | ZQ203GU508000000 | ZQ203GU50A000000 | ZQ203GU50A200000 | |
| M10x1 | ZQ203MU502000000 | ZQ203MU504000000 | ZQ203MU506000000 | ZQ203MU508000000 | ZQ203MU50A000000 | ZQ203MU50A200000 | |
| Snap-in | ZQ203TU502000000 | ZQ203TU504000000 | ZQ203TU506000000 | ZQ203TU508000000 | ZQ203TU50A000000 | ZQ203TU50A200000 | |

Cat5-4-4-6 Contact us www.ultimheat.com


Because of permanent improvement of our products,

Positive pressure switches

Single pole snap action contact pressure switch with check valve. In line assembly on 10mm soft tubes. Special for camping water supply pumps

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|---------------------------------|---------------------------|-------------------------------|-------------------------------|------|
| For flexible tubes with 10mm ID | 22 (8)A 250VAC | 30 kPa (300 mbar, 4.3 PSI) | 1.1 bar (0.11 Mpa, 16 PSI) | ZR |



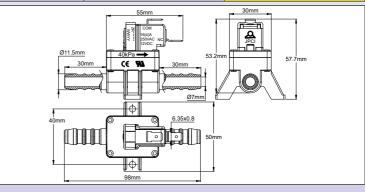

Main applications:

Direct actuating of pumps of the water supply for sinks and showers in recreational vehicles (Caravans, motorhomes). It starts the operation of the pump when the valve is open and when the pressure drops in the circuit.

Fluid: Water

Pressure port connection: Plastic spouts, with barbed end for flexible reinforced tubing with an internal diameter of 10 mm.

Membrane: Silicone, thickness 1mm

Check valve: PA66 with silicone gasket and stainless steel spring

Housing: PA66 compatible with drinking water. **Contact:** SPNC opening by pressure rise

Electrical rating:

In alternating current: 16 (4)A 125 / 250VAC; 1/2HP 125VAC; 3/4HP 250VAC (Available up to 22 (8)A 250VAC, 2HP 250VAC)

Direct current: 16 (4)A 12V

Electrical connection: 6.35×0.8 mm quick connect terminals

Bursting pressure: > 4.5bar (0.45Mpa, 65PSI)

Ambient temperature limits: water: 0 to 85°C (32 to 185°F)

Mounting: 2 legs for mounting on a board surface with 2 screws with 40 mm distance

Operation: The non-return valve maintains the pressure in the water circuit when the submersible pump is stopped.

Caution: This device does not protect the pump against dry running

Maximum calibration value: 1.1 bar (0.11 Mpa, 16 PSI)

Indicative installation mode:



1: Sink tap
2: Shower head and tap
3: Electric circuit fuse
4: 12V battery
5: ZR pressure switch
6: DC immersed pump
7: Water tank

References:

| Set point calibration | 40 kPa (400 mbar, 5.8 PSI) | 80 kPa (800 mbar, 11.6 PSI) | 1 bar (0.1 Mpa, 14.5 PSI) |
|-----------------------|----------------------------|-----------------------------|---------------------------|
| Part number | ZR202XU5YD000000 | ZR202XU5YH000000 | ZR202XU5YJ000000 |



Cat5-4-5-1

Adjustable set point positive pressure switches

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Contact us www.ultimheat.com




be modified without prior advice these data sheets are for guidance only and can products, Because of permanent improvement of our

Adjustable set point positive pressure switches

Snap action contact adjustable set point positive pressure switch. IP65 waterproof. ½" center threads.

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|----------------------------|---------------------------|------------------------------|-------------------------------|------|
| PA66, ½" BSPT or ½" NPT | 3A 125/250VAC | 7 kPa (70 mbar, 1 PSI) | 2.5 bar (0.25 Mpa, 36 PSI) | ZJ |



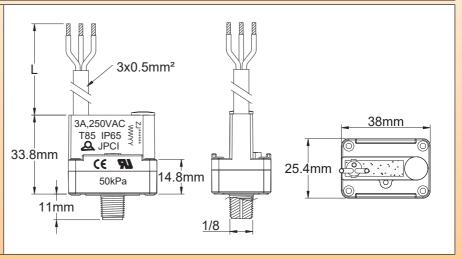

Main applications:

This pressure switch is distinguished by its small footprint and its IP65 ingress protection. The adjustment can be made by the end user after removing the cap protecting the adjustment screw.

It is particularly intended for domestic reverse osmosis filtration devices, detection of the operation of miniature pumps, spa and balneotherapy heaters, and all applications where there is a risk of splashing water.

Main Features:

Membrane: Silicone. **Fluid:** Water or air

Fitting: PA66, 1/8" BSPT or 1/8" NPT

Pressure: Positive

Housing: PA66, UL94 VO. IP65 Ingress protection

Contact: SPDT, snap action.

Electrical rating: 3A 125/250VAC, resistive

Action: Momentary.

Set point adjustment: Field adjustable by screw driver, after removing the calibration screw cap.

Adjustment limits: 7 to 250 kPa (70 to 2500 mbar, 1 to 36 PSI)

Bursting pressure: > 10 bar (1 Mpa, 145 PSI)

Electrical connection: PVC insulated cable, 3 × 0.5mm² (AWG20)

Ambient temperature limits: water: 0 to 85° C (32 to 185° F), Air: -10° 85° C (14 to 185° F).

Contact us

Main part numbers. Calibration point preset at 20 kPa (200 mbar, 2.9 PSI):

| Fitting | Cable length 500mm | Cable length 1000mm | Cable length 2000mm |
|-----------|--------------------|---------------------|---------------------|
| 1⁄8" BSPT | ZJ203VM1Z020000E | ZJ203VM1Z020000J | ZJ203VM1Z020000T |
| 1⁄8" NPT | ZJ203ZM1Z020000E | ZJ203ZM1Z020000J | ZJ203ZM1Z020000T |

Updated 2025/09/11

www.ultimheat.com


Cat5-4-5-3

Adjustable set point positive pressure switches

Adjustable snap action contact miniature pressure switches, PA66 fitting.

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|----------------------------|---------------------------|------------------------------|-------------------------------|------|
| PA66, ½" BSPT or ½"NPT. | 22 (8)A 250VAC | 8 kPa (80 mbar, 1.2 PSI) | 2.5 bar (0.25 Mpa, 36 PSI) | ZZ |



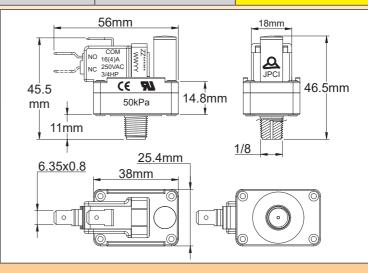

Main applications:

In this pressure switch, the adjustment can be made by the end user after removing the cover protecting the adjustment screw.

It is particularly intended for domestic reverse osmosis water filtration devices, detection of the operation of pumps, spa and balneotherapy heaters, control of clogging of swimming pool filters.

Its high electrical rating allows it to be used in direct control of motors or heating elements.

Main Features:

Membrane: Silicone. Fluid: Water or air

Fitting: PA66, 1/8" BSPT or 1/8" NPT.

Pressure: Positive Housing: PA66, UL94 VO. Contact: SPDT, snap action.

Electrical rating: 2HP 250VAC, 22 (8) A 250VAC

Action: Momentary.

Set point adjustment: Field adjustable by screw driver, after removing the calibration screw cap.

Adjustment limits: 8 to 250 kPa (80 to 2500 mbar, 1.2 to 36 PSI)

Bursting pressure: > 10bar (1Mpa, 145PSI) **Electrical connection:** 6.35 × 0.8mm tabs

Ambient temperature limits: water: 0 to 85°C (32 to 185°F), Air: -10 ~ 85°C (14 to 185°F).

Main part numbers. Calibration point preset at 20 kPa (200 mbar, 2.9 PSI):

| Fitting | Part number | |
|----------|------------------|--|
| ⅓" BSPT | ZZ273VU6X0000200 | |
| 1⁄2" NPT | ZZ273ZU6X0000200 | |

Cat5-4-5-4 Contact us www.ultimheat.com


features used on these data sheets are for guidance only and can be modified without prior advice

Adjustable set point positive pressure switches

Snap action contact pressure switches, field adjustable, for incorporation, 1/8" fitting, SPDT contact

| Fitting | Pressure | Contact | Minimum set point adjustment | Maximum set point adjustment | Туре |
|----------------------------|----------|---------|------------------------------|------------------------------|------|
| PA66, ½" BSPT or ½" NPT | Positive | SPDT | 5 kPa (50 mbar, 0.7 PSI) | 5 bar (0.5 Mpa, 72.5 PSI) | MA |



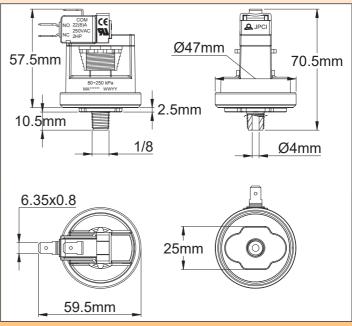

Main applications:

Pressure sensing on water heaters, boilers, spas and swimming pool heaters and filters, sprinklers circuits, electrical appliances. Its high electrical rating allows its use on pumps, motors, electrical heaters. For incorporation.

Technical features:

Membrane: Silicone, dia 45 mm.

Fluid: Water or air

Fitting: PA66, 1/8"NPT or BSPT

Pressure: Positive

Contact: SPDT, snap action. Electrical rating: 22 (8)A 250VAC

Action: Momentary.

Because of permanent improvement

Set point calibration: Field adjustable with knob

Standard adjustment ranges (mbar): 100 to 200; 150 to 350; 300 to 800; 600 to 5000.

These devices can also be factory calibrated upon customer request.

Electrical connection: 6.35 × 0.8mm quick connect terminals **Maximum adjustment pressure:** 5 bar (0.5 Mpa, 72.5 PSI).

Bursting pressure: > 25bar (2.5Mpa, 362PSI)

Ambient temperature limits: Air: -10 to 85°C (14 to 185°F) Water: 0 to 85°C (32 to 185°F)

Main parts numbers with 22 (8)A 250VAC switch:

| | Set point adjustment range | | | | | |
|----------------|--|--|---|---|--|--|
| Pressure inlet | 10 to 20 kPa (100 to 200 mbar, 1.5 to 2.9 PSI) | 15 to 35 kPa (150 to 350 mbar, 2.2 to 5.1 PSI) | 30 to 80 kPa (300 to 800 mbar, 4.4 to 11.6 PSI) | 60 to 500 kPa (600 to 5000 mbar, 8.7 to 72.5 PSI) | | |
| %" NPT | MA10U847HP410200 | MA10U847HP410350 | MA10U847HP410800 | MA10U847HP415000 | | |
| ⅓"BSPT | MA10U847LP410200 | MA10U847LP410350 | MA10U847LP410800 | MA10U847LP415000 | | |

Updated 2025/09/11


Contact us www.ultimheat.com Cat5-4-5-5



Adjustable set point positive pressure switches

Snap action contact pressure switches, field adjustable, 1/8" fitting, SPDT contact, with or without IP65 enclosure

| Fitting | Pressure | Contact | Minimum set point adjustment | Maximum set point adjustment | Туре |
|----------------------------|----------|---------|------------------------------|------------------------------|------|
| PA66, ½" BSPT or ½" NPT | Positive | SPDT | 5 kPa (50 mbar, 0.7 PSI) | 5 bar (0.5 Mpa, 72.5 PSI) | MB |

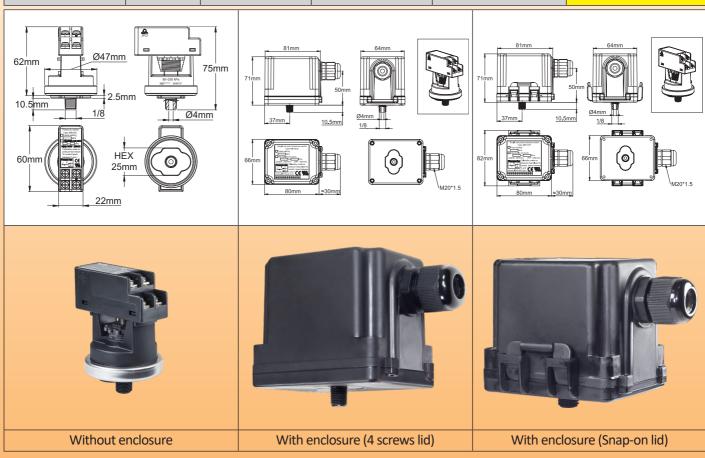

Main applications:

Pressure sensing on water heaters, boilers, spas and swimming pool heaters and filters, sprinklers circuits, electrical appliances. Its high electrical rating allows its use on pumps, motors, electrical heaters. Their screw terminals allow field mounting and wiring.

Technical features:

Membrane: Silicone, dia 45 mm.

Fluid: water or air

Fitting: PA66, 1/8"NPT or BSPT

Enclosure: They can be supplied without enclosure or with black PA66 enclosure, IP65 with one M20 cable gland

output, 4 screws lid; or with snap-on lid.

Pressure: Positive

Contact: SPDT, snap action. **Electrical rating:** 22 (8)A 250VAC

Action: Momentary.

Set point calibration: Field adjustable with knob

Standard adjustment ranges (mbar): 100 to 200; 150 to 350; 300 to 800; 600 to 5000.

These devices can also be factory calibrated upon customer request.

Electrical connection: Screw terminals

Maximum adjustment pressure: 5 bar (0.5 Mpa, 72.5 PSI).

Bursting pressure: > 25bar (2.5Mpa, 362PSI)

Ambient temperature limits: Air: -10 to 85°C (14 to 185°F) Water: 0 to 85°C (32 to 185°F)

Cat5-4-5-6 Contact us www.ultimheat.com





Adjustable set point positive pressure switches

Main parts numbers with 22 (8)A 250VAC switch, without enclosure

| | Set point adjustment range | | | | | |
|-------------------|--|--|---|---|--|--|
| Pressure inlet | 10 to 20 kPa (100 to 200 mbar, 1.5 to 2.9 PSI) | 15 to 35 kPa (150 to 350 mbar, 2.2 to 5.1 PSI) | 30 to 80 kPa (300 to 800 mbar, 4.4 to 11.6 PSI) | 60 to 500 kPa (600 to 5000 mbar, 8.7 to 72.5 PSI) | | |
| 1%" NPT | MB10U845HP400100 | MB10U845HP400350 | MB10U845HP400800 | MB10U845HP405000 | | |
| ⅓"BSPT | MB10U845LP400100 | MB10U845LP400350 | MB10U845LP400800 | MB10U845LP405000 | | |

Main parts numbers with 22 (8)A 250VAC switch, with enclosure and 4 screws lid

| | Set point adjustment range | | | | | |
|-------------------|--|--|---|---|--|--|
| Pressure inlet | 10 to 20 kPa (100 to 200 mbar, 1.5 to 2.9 PSI) | 15 to 35 kPa (150 to 350 mbar, 2.2 to 5.1 PSI) | 30 to 80 kPa (300 to 800 mbar, 4.4 to 11.6 PSI) | 60 to 500 kPa (600 to 5000 mbar, 8.7 to 72.5 PSI) | | |
| 1/8" NPT | MB10U845HP40010A | MB10U845HP40035A | MB10U845HP40080A | MB10U845HP40500A | | |
| ⅓"BSPT | MB10U845LP40010A | MB10U845LP40035A | MB10U845LP40080A | MB10U845LP40500A | | |

Main parts numbers with 22 (8)A 250VAC switch, with enclosure and snap-on lid

| Pressure inlet | Set point adjustment range | | | | | | |
|-------------------|--|--|---|---|--|--|--|
| | 10 to 20 kPa (100 to 200 mbar, 1.5 to 2.9 PSI) | 15 to 35 kPa (150 to 350 mbar, 2.2 to 5.1 PSI) | 30 to 80 kPa (300 to 800 mbar, 4.4 to 11.6 PSI) | 60 to 500 kPa (600 to 5000 mbar, 8.7 to 72.5 PSI) | | | |
| 1/8" NPT | MB10U845HP40010B | MB10U845HP40035B | MB10U845HP40080B | MB10U845HP40500B | | | |
| 1⁄3′′BSPT | MB10U845LP40010B | MB10U845LP40035B | MB10U845LP40080B | MB10U845LP40500B | | | |

Contact us www.ultimheat.com Cat5-4-5-7


2

Adjustable set point positive pressure switches

Double pole snap action contact pressure switch, 2 independents adjustable set points, field adjustable, for incorporation, ½" fitting, SPDT contact

| Fitting | Pressure | Contact | Minimum set point adjustment | Maximum set point adjustment | Туре |
|----------------------------------|----------|----------------------|-------------------------------|------------------------------|------|
| PA66, ½" BSP1 ½" NPT or ½" BS | | Two snap action SPDT | 30 kPa (300 mbar, 2.9 PSI) | 12 bar (1.2 Mpa, 174 PSI) | MC |



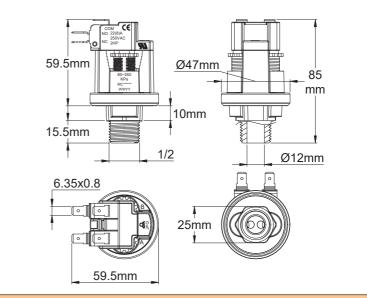

Main applications:

Pressure sensing on water heaters, boilers, spas and swimming pool heaters and filters, sprinklers circuits, electrical appliances. Its high electrical rating allows its use on pumps, motors, electrical heaters.

The two independent set points allow use in control plus alarm, control with differential adjustment, or high and low pressure alarm. They are intended to be incorporated by OEM.

Main Features:

Membrane: Two Silicone membranes, dia 17.5 mm.

Fluid: Water or air

Fitting: PA66, ½"NPT, ½" BSPT or ½" BSPP

Pressure: Positive

Contacts: Two SPDT, snap action.

Electrical rating: 2 x 22 (8)A 250VAC, (2HP)

Action: Momentary.

Set point calibration: Field adjustable with knob

Standard adjustment ranges (mbar): 300 to 600; 400 to 1200; 900 to 3000; 1400 to 5000;1500 to 9000.

These devices can also be factory calibrated upon customer request.

Electrical connection: 6.35 x 0.8mm quick connect terminals **Maximum operating pressure:** 12 bar (1.2 Mpa, 174 PSI)

Bursting pressure: > 50 bar (5 Mpa, 725 PSI)

Ambient temperature limits: Air: -10 to 85°C (14 to 185°F) Water: 0 to 85°C (32 to 185°F)

Main part numbers:

| Pressure inlet | Set point adjustment range | | | | | |
|----------------|---|---|--|--|---|--|
| | 30 to 60 kPa (300 to 600 mbar, 4.5 to 9PSI) | 40 to 120 kPa (400 to 1200 mbar, 6 to 17.5 PSI) | 90 to 300 kPa (900 to 3000 mbar, 13 to 43 PSI) | 140 to 500 kPa (1400 to 5000 mbar, 20 to 72.5 PSI) | 150 to 900 kPa (1500 to 9000 mbar, 20 to 130 PSI) | |
| ½" NPT | MC21T845PP7V0600 | MC21T845PP7V1200 | MC21T845PP7V3000 | MC21T845PP7V5000 | MC21T845PP7V9000 | |
| ½"BSPT | MC21T845QP7V0600 | MC21T845QP7V1200 | MC21T845QP7V3000 | MC21T845QP7V5000 | MC21T845QP7V9000 | |
| ½"BSPP | MC21T845RP7V0600 | MC21T845RP7V1200 | MC21T845RP7V3000 | MC21T845RP7V5000 | MC21T845RP7V9000 | |


Cat5-4-5-8 Contact us www.ultimheat.com



Adjustable set point positive pressure switches

Double pole snap action contact pressure switch, 2 independents adjustable set points, field adjustable, ½" fitting, SPDT contact, with or without IP65 enclosure

| Fitting | Pressure | Contact | Minimum set point adjustment | Maximum set point adjustment | Туре |
|----------------------------------|----------|----------------------|-------------------------------|------------------------------|------|
| PA66, ½" BSPT, ½" NPT or ½" BSPP | Positive | Two snap action SPDT | 30 kPa (300 mbar, 2.9 PSI) | 12 bar (1.2 Mpa, 174 PSI) | MD |

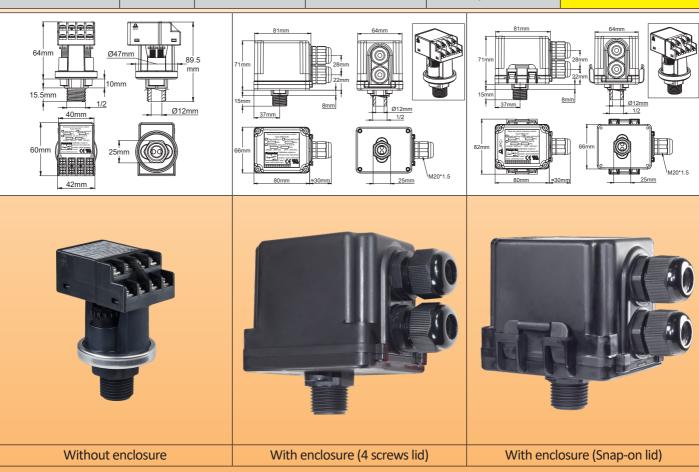

Main applications:

Pressure sensing on water heaters, boilers, spas and swimming pool heaters and filters, sprinklers circuits, electrical appliances. Its high electrical rating allows its use on pumps, motors, electrical heaters. Their screw terminals allow field mounting and wiring.

Technical features:

Membrane: Two Silicone membranes. dia 17.5 mm.

Fluid: Water or air

drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Fitting: PA66, ½"NPT, ½" BSPT or ½" BSPP

Pressure: Positive

Contacts: Two SPDT, snap action.

Electrical rating: 2 x 22 (8)A 250VAC, (2HP)

Action: Momentary.

Set point calibration: Field adjustable with knob

Standard adjustment ranges (mbar): 300 to 600; 400 to 1200; 900 to 3000; 1400 to 5000;1500 to 9000.

These devices can also be factory calibrated upon customer request.

Electrical connection: screw terminals

Maximum operating pressure: 12bar (1.2Mpa, 174PSI).

Bursting pressure: > 50bar (5Mpa, 725PSI)

Ambient temperature limits: Air: -10 to 85°C (14 to 185°F) Water: 0 to 85°C (32 to 185°F)

Contact us www.ultimheat.com Cat5-4-5-9

Adjustable set point positive pressure switches

Main parts numbers with two 22 (8)A 250VAC switches, without enclosure

| | Set point adjustment range | | | | | |
|-------------------|---|---|--|--|---|--|
| Pressure inlet | 30 to 60 kPa (300 to 600 mbar, 4.5 to 9PSI) | 40 to 120 kPa (400 to 1200 mbar, 6 to 17.5 PSI) | 90 to 300 kPa (900 to 3000 mbar, 13 to 43 PSI) | 140 to 500 kPa (1400 to 5000 mbar, 20 to 72.5 PSI) | 150 to 900 kPa (1500 to 9000 mbar, 20 to 130 PSI) | |
| ½" NPT | MD21T845PP7V0600 | MD21T845PP7V1200 | MD21T845PP7V3000 | MD21T845PP7V5000 | MD21T845PP7V9000 | |
| ½"BSPT | MD21T845QP7V0600 | MD21T845QP7V1200 | MD21T845QP7V3000 | MD21T845QP7V5000 | MD21T845QP7V9000 | |
| ½"BSPP | MD21T845RP7V0600 | MD21T845RP7V1200 | MD21T845RP7V3000 | MD21T845RP7V5000 | MD21T845RP7V9000 | |

Main parts numbers with two 22 (8)A 250VAC switches, with enclosure and 4 screws lid

| | Set point adjustment range | | | | | |
|----------------|---|---|--|--|---|--|
| Pressure inlet | 30 to 60 kPa (300 to 600 mbar, 4.5 to 9PSI) | 40 to 120 kPa (400 to 1200 mbar, 6 to 17.5 PSI) | 90 to 300 kPa (900 to 3000 mbar, 13 to 43 PSI) | 140 to 500 kPa (1400 to 5000 mbar, 20 to 72.5 PSI) | 150 to 900 kPa (1500 to 9000 mbar, 20 to 130 PSI) | |
| ½" NPT | MD21T845PP7V060E | MD21T845PP7V120E | MD21T845PP7V300E | MD21T845PP7V500E | MD21T845PP7V900E | |
| ½"BSPT | MD21T845QP7V060E | MD21T845QP7V120E | MD21T845QP7V300E | MD21T845QP7V500E | MD21T845QP7V900E | |
| ½"BSPP | MD21T845RP7V060E | MD21T845RP7V120E | MD21T845RP7V300E | MD21T845RP7V500E | MD21T845RP7V900E | |

Main parts numbers with two 22 (8)A 250VAC switches, with enclosure and snap-on lid


| | Set point adjustment range | | | | | |
|----------------|---|---|--|--|---|--|
| Pressure inlet | 30 to 60 kPa (300 to 600 mbar, 4.5 to 9PSI) | 40 to 120 kPa (400 to 1200 mbar, 6 to 17.5 PSI) | 90 to 300 kPa (900 to 3000 mbar, 13 to 43 PSI) | 140 to 500 kPa (1400 to 5000 mbar, 20 to 72.5 PSI) | 150 to 900 kPa (1500 to 9000 mbar, 20 to 130 PSI) | |
| ½" NPT | MD21T845PP7V060F | MD21T845PP7V120F | MD21T845PP7V300F | MD21T845PP7V500F | MD21T845PP7V900F | |
| ½"BSPT | MD21T845QP7V060F | MD21T845QP7V120F | MD21T845QP7V300F | MD21T845QP7V500F | MD21T845QP7V900F | |
| ½"BSPP | MD21T845RP7V060F | MD21T845RP7V120F | MD21T845RP7V300F | MD21T845RP7V500F | MD21T845RP7V900F | |

Adjustable set point positive pressure switches

Positive pressure switch Snap action, 3 poles, adjustable, brass fitting

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|---------|---------------------------|------------------------------|----------------------------|------|
| Brass | 3 × 22 (8)A 250VAC | 5 kPa (50 mbar, 0.7 PSI) | 2 bar (0.2 Mpa, 29 PSI) | ENM |



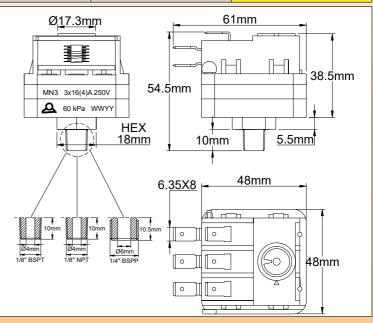

Main applications:

Pressure sensing on water heaters, boilers, spas and swimming pools heaters and filters, electrical appliances. Can be used to switch directly 3 pole heating elements.

Main Features:

Membrane: EPDM, dia. 45mm. Silicone on request.

Fluid: Water or air Fitting: Brass. Pressure: Positive Housing: PA66, UL94 VO.

Contacts: 3 SPDT switches, snap action.

Electrical rating: $\frac{3}{4}$ HP 250VAC, 16 (4)A 250VAC (Available up to 3 × 22 (8)A 3 × 2HP 250VAC).

Action: Momentary.

Set point calibration: Field adjustable with screw driver at ±20% of the factory calibration value.

Calibration limits: 5 kPa to 200 kPa (50 to 2000 mbar, 0.7 to 29 PSI). **Electrical connection:** 6.35×0.8 mm quick connection terminals

Maximum pressure: 2 bar (0.2 Mpa, 29 PSI). Bursting pressure: >8 bar (0.8 Mpa, 116PSI)

Ambient temperature limits: water: 0 to 85°C (32 to 185°F), Air: -10 ~ 85°C (14 to 185°F)

Options: Also available with only 2 switches (type MN2)

Approval: no UL certificate

Main part numbers:

| Pressure port | Calibration | | | | | | |
|---------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|------------------------------|---------------------------------|--|
| | 20 kPa (200 mbar, 2.9 PSI) | 40 kPa (400 mbar, 5.8 PSI) | 60 kPa (600 mbar, 8.7 PSI) | 80 kPa (800 mbar, 11.6 PSI) | 1 bar (0.1 Mpa, 14.5 PSI) | 1.2 bar (0.12 Mpa, 17.4 PSI) | |
| %" NPT | MN30U540H040D200 | MN30U540H040D400 | MN30U540H040D600 | MN30U540H040D800 | MN30U540H040DA00 | MN30U540H040DA20 | |
| 1/8" BSPT | MN30U540L040D200 | MN30U540L040D400 | MN30U540L040D600 | MN30U540L040D800 | MN30U540L040DA00 | MN30U540L040DA20 | |
| ⅓" BSPP | MN30U5403040D200 | MN30U5403040D400 | MN30U5403040D600 | MN30U5403040D800 | MN30U5403040DA00 | MN30U5403040DA20 | |

Contact us www.ultimheat.com Cat5-4-5-11



Adjustable set point positive pressure switches

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice



Vacuum pressure switches with PA66 fitting


Contact us www.ultimheat.com Cat5-4-6-1



Vacuum pressure switches

Low voltage circuit vacuum pressure switch.

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Lowest negative pressure calibration | Туре |
|---------|---------------------------|---------------------------------|--------------------------------------|------|
| PA66 | 1A 250VAC | -1 kPa (-10 mbar, -0.15 PSI) | -90 kPa (-900 mbar, -13 PSI) | ZD |

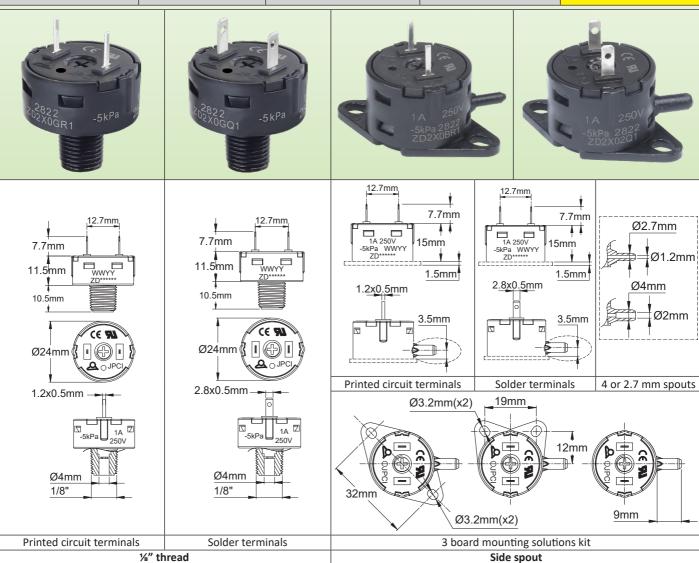

Main applications:

These miniature slow-action pressure switches greatly outperform snap action models because they have high sensivity and low differential. They are designed to be incorporated into a printed circuit board which provides power relay. Their reduced thickness of 15mm favors installation in applications requiring a small footprint.

Technical features:

Fluid: Air or water

Pressure port connection: 1/8" BSPT, 1/8" NPT or side spout

- For $\frac{1}{6}$ " (3mm) ID flexible plastic tubing - For $\frac{1}{16}$ " (1.5 mm) ID flexible plastic tubing Maximum PVC tube hardness 70 shore A **Membrane:** Silicone, 22mm diameter.

Housing: PA66

Contact: Slow make and break, contact is closed at atmospheric pressure and open when vacuum increases.

Electrical rating: 1A 250VAC resistive (silver contacts), 10mA 24VDC (5 microns gold plated contacts). We recommend gold plated contacts for low voltage and low current circuits to avoid the increase in contact resistance that appears on silver contacts as they oxidize.

Action: Momentary

Contact us www.ultimheat.com Cat5-4-6-3



Electrical connection: 2.8×0.5 mm quick connect terminals or printed circuit pins 1.2mm $\times 0.5$ mm

Lowest negative pressure: -90 kPa (-900 mbar, -13 PSI)

Bursting pressure: > 4bar (0.4Mpa, 60PSI)

Ambient temperature limits: Air: -10 ~ 85°C (14 to 185°F). Water: 0 to 85°C (32 to 185°F).

Mounting fittings: 1/8" BSPT or 1/8" NPT or side spout.

Main part numbers with printed circuit terminals and silver contacts*

| Pressure port fitting | Included accessories | Calibration at -10 kPa (-100 mbar, -1.45 PSI) | Calibration at -25 kPa (-250 mbar, -3.63 PSI) | Calibration at -50 kPa (-500 mbar, -7.25 PSI) |
|--|---|--|--|--|
| %"BSPT | None | ZD2X0PR140100000 | ZD2X0PR140250000 | ZD2X0PR140500000 |
| 1/8"NPT | None | ZD2X0SR140100000 | ZD2X0SR140250000 | ZD2X0SR140500000 |
| Spout on the side for 1/8" (6 × 3mm) tube | One set of 2 different snap-on brackets | ZD2X02R14010000V | ZD2X02R14025000V | ZD2X02R14050000V |
| Spout on the side for $\frac{1}{6}$ " (3 × 1.5mm) tube | One set of 2 different snap-on brackets | ZD2X0BR14010000V | ZD2X0BR14025000V | ZD2X0BR14050000V |

^{*} For quick connection terminal, replace R1 by Q1 in the 7th and 8th character.

Main part numbers with printed circuit terminals and gold plated contacts*

| Pressure port fitting | Included accessories | Calibration at -10 kPa (-100 mbar, -1.45 PSI) | Calibration at -25 kPa (-250 mbar, -3.63 PSI) | Calibration at -50 kPa (-500 mbar, -7.25 PSI) |
|--|---|--|--|--|
| ½"BSPT | None | ZD2X0PRG40100000 | ZD2X0PRG40250000 | ZD2X0PRG40500000 |
| 1/8"NPT | None | ZD2X0SRG40100000 | ZD2X0SRG40250000 | ZD2X0SRG40500000 |
| Spout on the side for 1/8" (6 × 3mm) tube | One set of 2 different snap-on brackets | ZD2X02RG4010000V | ZD2X02RG4025000V | ZD2X02RG4050000V |
| Spout on the side for $\frac{1}{6}$ " (3 × 1.5mm) tube | One set of 2 different snap-on brackets | ZD2X0BRG4010000V | ZD2X0BRG4025000V | ZD2X0BRG4050000V |


^{*} For quick connection terminal, replace RG by QG in the 7th and 8th character.

Vacuum pressure switches

Snap action contact adjustable set point vacuum pressure switch

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Lowest negative pressure calibration | Туре |
|---------|---------------------------|--------------------------------|--------------------------------------|------|
| PA66 | 22 (8)A 250VAC | -5 kPa (-50 mbar, -0.7 PSI) | -90 kPa (-900 mbar, -13 PSI) | ZU |





Main applications:

Vacuum detection on pumps, in particular on balneotherapy heaters, swimming pool filters, automated assembly lines. The snap-action contact allows direct control of motors or heating elements.

Main Features:

Membranes: Silicone, dia.21 × 33.5mm.

Fluid: Water or air

Pressure port connection: PA66, 1/8" BSPT or 1/8" NPT

Pressure: Negative (Vacuum)
Housing: PA66, UL94 VO
Contact: SPDT, snap action.

Electrical rating:

- Standard rating micro-switch (low and medium vacuum only): 16 (4)A 125/250VAC; 1/2HP 125VAC; 1/3HP 250VAC.
- High rating micro-switch (medium and high vacuum calibration only): 2HP 250VAC, 22 (8)A 250VAC.

Action: Momentary.

Set point calibration: factory calibrated and sealed, not field adjustable. The value given is that of the opening of the contact when the vacuum becomes greater

contact when the vacuum becomes greater.

Calibration condition: The contact between COM and NC opens when vacuum pressure goes from atmospheric pressure to requested vacuum set point. When the atmospheric pressure is positive, the contact is closed between COM and NC.

Set point calibration limits: From -5 kPa (-50 mbar, -0.7 PSI) to -50 kPa (-500 mbar, -7 PSI).

Electrical connection: 6.35 × 0.8mm quick connect terminals. **Lowest negative pressure:** -90 kPa (-900 mbar, -13 PSI).

Bursting pressure: > 10bar (1Mpa, 145PSI)

Ambient temperature limits: water: 0 to 85°C (32 to 185°F), Air: -10 ~ 85°C (14 to 185°F)

References (with SPDT contact):

| Pressure inlet | Set point value | Micro-switch 16 (4)A, ¾HP 250VAC. | Micro-switch 22 (8)A, 2HP 250VAC. |
|----------------|------------------------------|-----------------------------------|-----------------------------------|
| | -10 kPa (100 mbar, 1.45 PSI) | ZU253ZU1Z0100000 | ZU273ZU6Z0100000 |
| ⅓" NPT | -25 kPa (250 mbar,3.6 PSI) | ZU253ZU1Z0250000 | ZU273ZU6Z0250000 |
| | -50 kPa (500 mbar, 7.3 PSI) | ZU253ZU1Z0500000 | ZU273ZU6Z0500000 |
| ½" BSPT | -10 kPa (100 mbar, 1.45 PSI) | ZU253VU1Z0100000 | ZU273VU6Z0100000 |
| | -25 kPa (250 mbar,3.6 PSI) | ZU253VU1Z0250000 | ZU273VU6Z0250000 |
| | -50 kPa (500 mbar, 7.3 PSI) | ZU253VU1Z0500000 | ZU273VU6Z0500000 |

Contact us www.ultimheat.com Cat5-4-6-5


Updated 2025/09/11

Vacuum pressure switches

Snap action contact miniature vacuum switch

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Lowest negative pressure calibration | Туре |
|---------|---------------------------|--------------------------------|--------------------------------------|------|
| PA66 | 22 (8)A 250VAC | -2 kPa (-20 mbar, -0.3 PSI) | -90 kPa (-900 mbar, -13 PSI) | ZS |



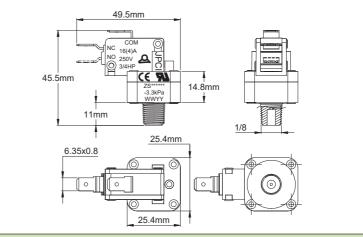

Main applications:

Vacuum detection on pumps, in particular on balneotherapy heaters, swimming pool filters, automated assembly lines. The snap-action contact allows direct control of motors or heating elements.

Main Features:

Membranes: EPDM, dia. 22mm. Silicone or NBR on request.

Fluid: Water or air

Pressure port connection: PA66, 1/8" BSPT or 1/8" NPT

Pressure: Negative (Vacuum) Housing: PA66, UL94 VO Contact: SPDT, snap action.

Electrical rating:

- Standard rating micro-switch (low and medium vacuum only): 16A 125/250VAC; ½HP 125VAC; ¾HP 250VAC. Differential is about 60 mbar.
- High rating micro-switch (medium and high vacuum calibration only): 2HP 250VAC, 22 (8)A 250VAC. Differential is about 90 mbar.

Action: Momentary.

Set point calibration: factory calibrated and sealed, not field adjustable. The value given is that of the opening of the contact when the vacuum becomes greater.

Calibration condition: The contact between COM and NC opens when vacuum pressure goes from atmospheric pressure to requested vacuum set point. When the atmospheric pressure is positive, the contact is closed between COM and NC.

Set point calibration limits: From -2 kPa (-20 mbar, -0.3 PSI) to -90 kPa (-900 mbar, -13 PSI).

Electrical connection: 6.35 × 0.8mm guick connect terminals. Maximum positive pressure: 3 bar (0.3 Mpa, 43.5 PSI). Lowest negative pressure: -90 kPa (-900 mbar, -13 PSI).

Bursting pressure: > 15 bar (1.5 Mpa, 217PSI)

Ambient temperature limits: water: 0 to 85°C (32 to 185°F), Air: -10 ~ 85°C (14 to 185°F)

Approval: UL 508

References (with SPDT contact):

| Pressure inlet | Set point value | Micro-switch 16 (4)A, ¾HP 250VAC. (Differential about 60 mbar) | Micro-switch 22 (8)A, 2HP 250VAC. (Differential about 90 mbar) |
|----------------|------------------------------|---|---|
| | -10 kPa (100 mbar, 1.45 PSI) | ZS2038U500100000 | ZS278U6001000000 |
| %" NPT | -20 kPa (200 mbar, 2.9 PSI) | ZS2038U500200000 | ZS278U6002000000 |
| | -30 kPa (300 mbar, 4.35 PSI) | ZS2038U500300000 | ZS278U6003000000 |
| | -10 kPa (100 mbar, 1.45 PSI) | ZS203GU500100000 | ZS27GU6001000000 |
| ⅓" BSPT | -20 kPa (200 mbar, 2.9 PSI) | ZS203GU500200000 | ZS27GU6002000000 |
| | -30 kPa (300 mbar, 4.35 PSI) | ZS203GU500300000 | ZS27GU6003000000 |

Updated 2025/09/11

Cat5-4-6-6 Contact us www.ultimheat.com


on these data sheets are for guidance only and can be modified without prior advice Because of permanent improvement

Vacuum pressure switches

Snap action contact adjustable set point vacuum pressure switch. 1/8" center thread, IP65 waterproof.

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Lowest negative pressure calibration | Туре |
|---------|---------------------------|--------------------------------|--------------------------------------|------|
| PA66 | 3A 125/250 VAC | -5 kPa (-50 mbar, -0.7 PSI) | -90 kPa (-900 mbar, -13 PSI) | ZX |





Main applications:

Its applications are in the detection of the suction of water pumps, filter clogging of vacuum cleaners, pumps for vacuum packaging devices, checking of the presence of vacuum in professional equipment.

Its high electrical rating allows it to be used without power relay in the control of motors or heating elements etc.

Technical features:

Membrane: Silicone Fluid: Air only

Fitting: PA66, 1/8" BSPT or 1/8" NPT

Pressure: Negative

Housing: PA66, UL94 VO. IP65 Ingress protection

Contact: SPDT, snap action.

Electrical rating: 3A 125/250 VAC, resistive

Action: Momentary.

Set point adjustment: Field adjustable by screw driver, after removing the calibration screw cap.

Set point calibration values: Standard -10 kPa (-100 mbar, -1.45 PSI). Other values between -5 kPa (-50 mbar,

-0.73 PSI) and -80 kPa (-800 mbar, -11.6 PSI) on request.

Electrical connection: PVC insulated cable, 3 × 0.5mm² (AWG20)

Maximum operating pressure:

- Exposure to ambient atmospheric pressure: +100 kPa (+1000 mbar, +14 PSI)

- Exposure to vacuum pressure: -90 kPa (-900 mbar, -13 PSI)

Bursting pressure: > 10bar (1Mpa, 145PSI)

Ambient temperature limits: Air: -10 ~ 85°C (14 to 185°F).

Main part numbers. Calibration point preset at -10 kPa (-100 mbar, -1.45 PSI):

| Fitting | Cable length 500mm | Cable length 1000mm | Cable length 2000mm |
|----------|--------------------|---------------------|---------------------|
| 1%" BSPT | ZX203VM1Z000000E | ZX203VM1Z000000J | ZX203VM1Z000000T |
| ⅓" NPT | ZX203ZM1Z000000E | ZX203ZM1Z000000J | ZX203ZM1Z000000T |

Contact us www.ultimheat.com Cat5-4-6-7



Differential pressure switches

Contact us www.ultimheat.com Cat5-4-7-1




Differential pressure switches

Low voltage circuit differential pressure switch, printed circuit terminals, 4mm spouts.

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|--------------------|---------------------------|---------------------------------|------------------------------|------|
| Two plastic spouts | 1A 250VAC | ±1 kPa (±10 mbar, ±0.15 PSI) | ±90kPa (±900mbar, ±13PSI) | ZH |



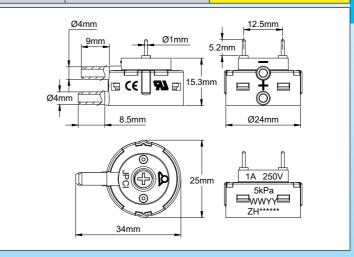

Main applications:

Electronic printed circuits. Detection of low positive, negative or differential pressure. Measurement of liquid levels, air flow, filters efficiency. Very small differential, about 0.2 kPa (2 mbar, 0.03 PSI)

Membranes: Silicone, dia 22mm.

Fluid: Air only

data sheets are for guidance only and can be modified without prior advice

Fitting: Two plastic spouts dia 4mm for soft PVC tube 3×6 mm (1/8")

Pressure: Differential Housing: PA66

Contact: Single pole normally open, slow make and break.

Electrical rating:

Because of permanent improvement of our

Silver contact: max 1A 250VAC resistive
 Gold plated contact: max 100 mA, 24VDC

Action: Momentary, close by pressure rise on positive pressure inlet

Set point calibration: Factory calibrated and sealed

Set point calibration limits: From ±1 to ±60 kPa (±10 to ±600 mbar, ±0.15 to ±9 PSI)

Differential: Less than 0.5 kPa (5 mbar, 0.07 PSI)

Electrical connection: printed circuit terminal, dia. 1mm, 12.5mm distance

Maximum operating pressure: ±90kPa(±900mbar, ±13PSI)

Bursting pressure: > 4bar (0.4Mpa, 60PSI)

Ambient temperature limits: Air: -10 ~ 85°C (14 to 185°F)

Note: 10 kPa= 100 millibars = 1.45 PSI= 40 inches of water = 1016mm of water.

References:

| Calibration: | Silver contact | Gold plated contact |
|-----------------------------|------------------|---------------------|
| 5 kPa (50 mbar, 0.72 PSI) | ZH2X25F110000050 | ZH2X25FG10000050 |
| 10 kPa (100 mbar, 1.45 PSI) | ZH2X25F110000100 | ZH2X25FG10000100 |
| 20 kPa (200 mbar, 2.90 PSI) | ZH2X25F110000200 | ZH2X25FG10000200 |
| 40 kPa (400 mbar, 5.8 PSI) | ZH2X25F110000400 | ZH2X25FG10000400 |

Updated 2025/09/22

Contact us www.ultimheat.com Cat5-4-7-3




Differential pressure switches

Low voltage circuit, IP65 waterproof differential pressure switch, various center threads.

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|---------|---------------------------|-------------------------------|----------------------------|------|
| PA66 | 1A 250VAC | 10 kPa (100 mbar, 1.5 PSI) | 4 bar (0.4 Mpa, 60 PSI) | ZC |



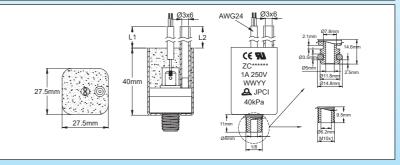

Main applications:

Use in areas where IP65 waterproofing is required. Medium positive, negative or differential pressure detection. Water level measurement, detection of clogging of water filters. Minimum water pressure detection on water heaters and boilers. This pressure switch is much more sensitive than snap-action systems and can be calibrated at lower pressures, but its use is limited to low power applications, typically on electronic circuits. Very low differential, less than 1 kPa (10 millibars, 0.15 PSI)

Membranes: Silicone, dia. 22mm.

Fluid: Water or air. (Connection of liquid on the negative pressure portis not allowed)

Fitting:

- Negative port by flexible PVC tube 3 × 6mm length 200mm (Other length on request)

- Positive port by 1/8" BSPT or NPT or 1/4" BSPP thread in PA66.

Housing: PA66, UL94 VO, IP65 Ingress protection

Contact: Single pole normally open, slow make and break.

Electrical rating:

- Silver contact: max 1A 250VAC

- Gold plated contact: max 100mA, 24VDC

Action: Momentary, close on pressure rise on the positive port.

Set point calibration: Factory calibrated and sealed, not field adjustable

Set point calibration limits: From 10 to 400 kPa (100 to 4000 mbar, 1.5 to 60 PSI)

Electrical connection: PVC insulated cable, 2 × 0.2mm² (AWG24)

Maximum pressure: 4 bar (0.4 Mpa, 60 PSI) Bursting pressure: > 16 bar (1.6 Mpa, 232 PSI)

Electrical connection: AWG24 cable, UL 2464 style, length 500mm (other lengths on request) **Ambient temperature limits:** water: 0 to 85°C (32 to 185°F), Air: -10 ~ 85°C (14 to 185°F)

Parts number (with 500mm cable and 300mm tube):

| Positive | | Calibration | | | | | |
|------------------|-------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------------------------|--|
| pressure port | Contact | 10 kPa (100 mbar, 1.5 PSI) | 20 kPa (200 mbar, 2.9 PSI) | 40 kPa (400 mbar, 5.8 PSI) | 60 kPa (600 mbar, 8.7 PSI) | 80 kPa (800 mbar, 11.6 PSI) | |
| 1%" NPT | Silver | ZC2X28EA01000000 | ZC2X28EA02000000 | ZC2X28EA04000000 | ZC2X28EA06000000 | ZC2X28EA08000000 | |
| /8 INF1 | Gold plated | ZC2X28EG01000000 | ZC2X28EG02000000 | ZC2X28EG04000000 | ZC2X28EG06000000 | ZC2X28EG08000000 | |
| ⅓" BSPT | Silver | ZC2X2GEA01000000 | ZC2X2GEA02000000 | ZC2X2GEA04000000 | ZC2X2GEA06000000 | ZC2X2GEA08000000 | |
| /8 D3P1 | Gold plated | ZC2X2GEG01000000 | ZC2X2GEG02000000 | ZC2X2GEG04000000 | ZC2X2GEG06000000 | ZC2X2GEG08000000 | |
| M10x1 | Silver | ZC2X2MEA01000000 | ZC2X2MEA02000000 | ZC2X2MEA04000000 | ZC2X2MEA06000000 | ZC2X2MEA08000000 | |
| IVITOXI | Gold plated | ZC2X2MEG01000000 | ZC2X2MEG02000000 | ZC2X2MEG04000000 | ZC2X2MEG06000000 | ZC2X2MEG08000000 | |
| Snan in | Silver | ZC2X2TEA01000000 | ZC2X2TEA02000000 | ZC2X2TEA04000000 | ZC2X2TEA06000000 | ZC2X2TEA08000000 | |
| Snap-in | Gold plated | ZC2X2TEG01000000 | ZC2X2TEG02000000 | ZC2X2TEG04000000 | ZC2X2TEG06000000 | ZC2X2TEG08000000 | |



Air switches for spas and swimming pools (latching or momentary action)

Contact us www.ultimheat.com Cat5-4-8-1




products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Air switches for spas and swimming pools

Creeping action contact air switch, single pole, momentary action New high sensivity types

| Fitting | Maximum Electrical rating | Minimum calibration pressure | Maximum calibration value | Туре |
|---------|---------------------------|------------------------------|------------------------------|------|
| PA66 | 1A 250VAC | 2 kPa (20 mbar, 0.29 PSI) | 90 kPa (900 mbar, 13 PSI) | ZG |

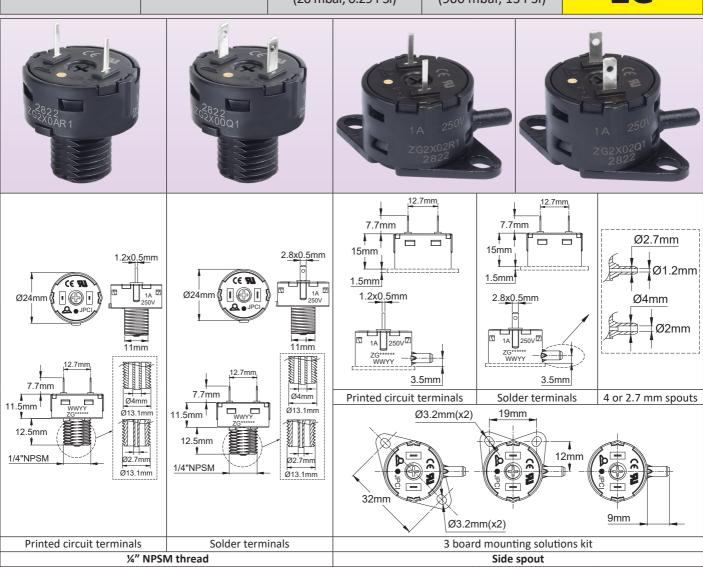

Main applications:

These miniature slow-action air switches are particularly effective for long-distance control systems, where they greatly outperform models using snap-action switches. They are designed to be incorporated into a printed circuit board which provides power relay and the latching function. They are used for controlling circulating pump motors in spas and swimming pools, counter-current swimming pumps, air blowers motors, as well as for lighting control. Its reduced thickness of 15mm favors its installation in applications requiring a small footprint. They feature in standard a patented barometric and thermometric compensation system to prevent unwanted tripping.

Technical features:

Fluid: Air only

Pressure port connection: Plastic spout
- For ⅓" (3mm) ID flexible plastic tubing
- For ⅙" (1.5 mm) ID flexible plastic tubing
Maximum PVC tube hardness 70 shore A
Membrane: Silicone, 22mm diameter.

Housing: PA66

Contact us www.ultimheat.com Cat5-4-8-3



Contact: Slow make and break, closes on pressure rise.

Electrical rating: 1A 250VAC resistive (silver contacts), 10mA 24VDC (5 microns gold plated contacts). We recommend gold plated contacts for low voltage and low current circuits to avoid the increase in contact resistance that appears on silver contacts as they oxidize.

Action: Momentary: the contact switch on when pressure rises, and switch off when pressure decreases.

Electrical connection: 2.8×0.5 mm quick connection terminal or 1.2×0.5 mm tin welding terminal

Maximum operating pressure: 90 kPa (900 mbar, 13 PSI) Ambient temperature limits: Air: -10 ~ 85°C (14 to 185°F).

Barometric compensation: Calibrated flow leak orifice inside the pressure chamber


Mounting fittings: ¼" NPSM thread with 11mm distance flats, for installation through a board, or side spout.

Switch operation: Operates on a sealed pressure air displacement, with patented calibrated micro-leak providing barometric and temperature compensation.

Caution: Use air transmitters with enough air volume to achieve minimum operating pressure. Too long connection tubes and/or too small pressure transmitter will not operate the air switch.

Accessories, in option or available as spare parts: ABS plastic nut (Maximum tightening torque 1.5 Nm) and tube securing nut (Maximum tightening torque 2 Nm).

How the locking nut tighten the PVC connecting tube:



In this series, the use of a connecting tube locking nut increases the force required to disconnect the tube by 350%. (It can then reach 14 daN)



1/4"NPSM nut reference if ordered as a spare part:

Z6VE10003500003A



1/4"NPSM securing nut reference if ordered as a spare part:

Z6VE10003500006A

Maximum actuating distances with flexible PVC connecting tube. (With air button and air pedal of this catalogue)

Tests with reproducible automatic test equipment, 5.6 cm³ (3.4 cubic inches) pneumatic button chamber, 75 kPa (750 mbar, 10.9 PSI) pressure impulse for 3 seconds)

| Calibration | Nominal tube I.D. | With air button | With foot pedal |
|-----------------------------|-------------------|---------------------|----------------------|
| 5 kPa (50 mbar, 0.73 PSI) | 1.5 mm | 26 m (85 ft. 4 in.) | 50 m (164 ft. 1 in.) |
| | 3 mm | 11 m (36 ft. 1 in.) | 31 m (101 ft. 8 in.) |
| 10 kPa (100 mbar, 1.45 PSI) | 1.5 mm | 13 m (42 ft. 8 in.) | 26 m (85 ft. 4 in.) |
| | 3 mm | 5 m (16 ft. 5 in.) | 12 m (39 ft. 4 in.) |

Main part numbers (Silver contacts*)

| Pressure port fitting | Included accessories | Calibration a 5 kPa (50 mbar, 0.73 PSI) | Calibration at 10 kPa (100 mbar, 1.45 PSI) |
|---|---|--|---|
| | None | ZG2X20F145000000 | ZG2X20F14A000000 |
| 1/2" NPSM with spout for 1/8" (3mm) | ¾" NPSM nut | ZG2X20F145000006 | ZG2X20F14A000006 |
| internal diameter PVC tube** | 1/4" NPSM tube securing nut | ZG2X20F145000007 | ZG2X20F14A000007 |
| | 1/4" NPSM nut + 1/4" NPSM tube securing nut | ZG2X20F145000005 | ZG2X20F14A000005 |
| Spout on the side for $\frac{1}{3}$ " (6 × 3mm) tube on the side | One set of 2 different snap-on brackets | ZG2X23F145000000 | ZG2X23F14A000000 |
| Spout on the side for $\frac{1}{16}$ " (3 × 1.5mm) tube on the side | One set of 2 different snap-on brackets | ZG2X2CF145000000 | ZG2X2CF14A000000 |

In bold: the most common models.

* For gold plated contacts, replace F1 by FG.

Cat5-4-8-4 Contact us www.ultimheat.com


^{**} Models with spout for $\frac{1}{16}$ "(1.5mm) internal diameter tube instead of $\frac{1}{16}$ " (3mm ID): replace the characters "20" in the reference by "2A".

data sheets are for guidance only and can be modified without prior advice of Because of permanent improvement

Air switches for spas and swimming pools

Snap action contact air switch, single pole, momentary or latching action

| Fitting | Standard rating | Maximum rating | Maximum remote actuating distance (Manual button, 3mm ID tube) | Туре |
|---------|---------------------|------------------|--|------|
| PA66 | 16A, ¾HP, 250VAC | 22A, 2HP, 250VAC | 7 (5)m | ZP |

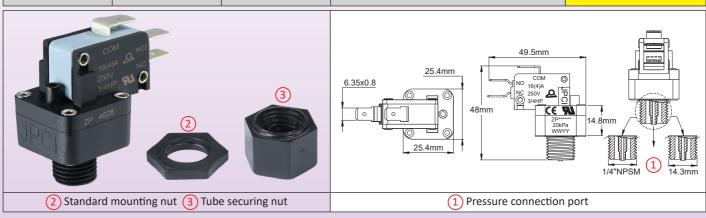

Main applications:

Direct actuating of pumps and blowers in spas and swimming pools, sink erasers, plumbing or home appliances used with risks of water splashing. Resist to spas and swimming pools ozone concentration.

They feature in standard a patented barometric and thermometric compensation.

Technical features :

Pressure port connection: Plastic spout for 1/8" (3mm) or 1/16" (1.5mm) ID flexible plastic tubing with maximum

hardness 70 shore A

Fluid: Air only

Membrane: EPDM, 22mm diameter. Silicone available on request

Housing: PA66, UL94 and ABS

Contact: Snap action. DPNO (DPDT available on request)

Electrical rating: Depends on micro-switch operating force that is linked to the electrical rating. Increasing the electrical rating reduces the actuating distance

- Standard rating micro-switch: 16A res. 125/250VAC; 1/2HP 125VAC; 1/34HP 250VAC
- High rating micro-switch (short actuating distance): 2HP 250VAC, 22 (8) A 250VAC

Action (2 styles of action are possible):

- <u>Momentary:</u> the contact switches when under pressure, and returns to its original position when there is no more pressure.
- <u>Latching</u>: a first pressure pulse switches the contact, which remains in this position, and only returns to its initial position with a second pressure pulse.

Electrical connection: 6.35×0.8 mm quick connect terminals Maximum operating pressure: 200 kPa (2000 mbar, 29 PSI) Ambient temperature limits: Air: $-10 \approx 85$ °C (14 to 185°F).

Barometric compensation: Calibrated flow leak orifice inside the pressure chamber Mounting fittings: ¼" NPSM without flats on thread, or %-18 with 2 possible flat positions

Switch operation: Operates on a sealed pressure air displacement.


Use air transmitters with enough air volume to achieve minimum operating pressure.

Caution: too long connecting tubing and/or too small pressure transmitter will not operate the air switch or will operate it with a momentary action.

Accessories (in option or available as spare parts): ABS plastic nut (Maximum tightening torque 1.5 Nm) and tube securing nut (Maximum tightening torque 2 Nm).

Approval: UL 508

%6-18 UNC and ¼" NPSM pressure port dimensions:





How the locking nut tighten the PVC connecting tube:



In this series, the use of a tube locking nut increases the force required to disconnect the tube by 180%. (It can then reach 7 daN).



-¼"NPSM nut reference if ordered as a spare part:

Z6VE10003500003A

-%-18 UNC nut reference if ordered as a spare part:

Z6VE10003500007A



-¼" NPSM tube securing nut reference if ordered as a spare part:

Z6VE10003500006A

-%-18 UNC tube securing nut reference if ordered as a spare part:

Z6VE10003500008A

Maximum actuating distances with flexible PVC connecting tube. (With air button and air pedal of this catalogue)

Tests with reproducible automatic test equipment, 5.6 cm³ (3.4 cubic inches) pneumatic button chamber, 75 kPa (750 mbar, 10.9 PSI) pressure impulse for 3 seconds

| Switch operating force | Nominal tube I.D. (mm) | With air button | With foot pedal |
|------------------------|------------------------|--------------------|---------------------|
| 100 gr. | 3 mm | 7 m (23 ft.) | 18 m (59 ft. 1 in.) |
| 160 gr. | 3 mm | 5 m (16 ft. 5 in.) | 12 m (39 ft. 4 in.) |

Part numbers with normally open contact, latching action*

| , , , , , | | | |
|-------------------------|--|---|--|
| Pressure port fitting | Included accessories | Standard switch (16A 250VAC, 3/4HP 250VAC) | High rating switch (22A 250VAC, 2HP 250VAC) |
| | None | ZP1021U500000000 | ZP1721U600000000 |
| ½" NPSM | ¼" NPSM nut | ZP1021U500000006 | ZP1721U600000006 |
| 74 INPOIN | 1/4" NPSM tube securing nut | ZP1021U500000007 | ZP1721U600000007 |
| | 1/4" NPSM nut +1/4" NPSM tube securing nut | ZP1021U500000005 | ZP1721U600000005 |
| | None | ZP102UU500000000 | ZP172UU600000000 |
| %-18 UNC, flats at 0° | %6-18 UNC nut | ZP102UU500000008 | ZP172UU600000008 |
| 716-10 UNC, Hats at U | %-18 UNC tube securing nut | ZP102UU500000009 | ZP172UU600000009 |
| | 18 UNC nut + 18-18 UNC tube securing nut | ZP102UU500000004 | ZP172UU600000004 |
| | None | ZP102WU500000000 | ZP172WU600000000 |
| 9/ 10 LING flata at 00° | %6-18 UNC nut | ZP102WU500000008 | ZP172WU600000008 |
| %-18 UNC, flats at 90° | %₅-18 UNC tube securing nut | ZP102WU500000009 | ZP172WU600000009 |
| | %-18 UNC nut + %-18 UNC tube securing nut | ZP102WU500000004 | ZP172WU600000004 |

Part numbers with normally open contact, momentary action*

| Pressure port fitting | Included accessories | Standard switch (16A 250VAC, 3/4HP 250VAC) | High rating switch (22A 250VAC, 2HP 250VAC) |
|-------------------------|--|---|--|
| | None | ZP2021U500000000 | ZP2721U600000000 |
| ½ NPSM | 1/ NPSM nut | | ZP2721U600000006 |
| 74 INPOINI | 1/4" NPSM tube securing nut | ZP2021U500000007 | ZP2721U600000007 |
| | 1/4" NPSM nut +1/4" NPSM tube securing nut | ZP2021U500000005 | ZP2721U600000005 |
| | None | ZP202UU500000000 | ZP272UU600000000 |
| %-18 UNC, flats at 0° | %-18 UNC nut | ZP202UU500000008 | ZP272UU600000008 |
| 716-10 UNC, Hats at 0 | %-18 UNC tube securing nut | ZP202UU500000009 | ZP272UU600000009 |
| | %-18 UNC nut + $%$ -18 UNC tube securing nut | ZP202UU500000004 | ZP272UU600000004 |
| | None | ZP202WU500000000 | ZP272WU600000000 |
| %-18 UNC, flats at 90° | %-18 UNC nut | ZP202WU500000008 | ZP272WU600000008 |
| /16-10 UIVC, Hats at 90 | %-18 UNC tube securing nut | ZP202WU500000009 | ZP272WU600000009 |
| | %-18 UNC nut + $%$ -18 UNC tube securing nut | ZP202WU500000004 | ZP272WU600000004 |

In bold: the most common models. The UNC %-18 thread is mainly used in North America, and the ¼ NPSM thread is used in Europe and Asia.

* Models with change-over (SPDT) contact: replace the 5th character "2" in the reference by "3".


NB: Previous models ZP1021U1****** and ZP2021U1******* are replaced by ZP1021U5****** and ZP1021U5*******

Cat5-4-8-6 Contact us www.ultimheat.com



Snap action contact air switch, single pole, momentary or latching action New high sensivity types

| Fitting | Standard rating | Maximum rating | Maximum remote actuating distance (Manual button, 3mm ID tube) | Туре |
|---------|---------------------|------------------|--|------|
| PA66 | 16A, ¾HP, 250VAC | 22A, 2HP, 250VAC | 7 (5)m | ZK |

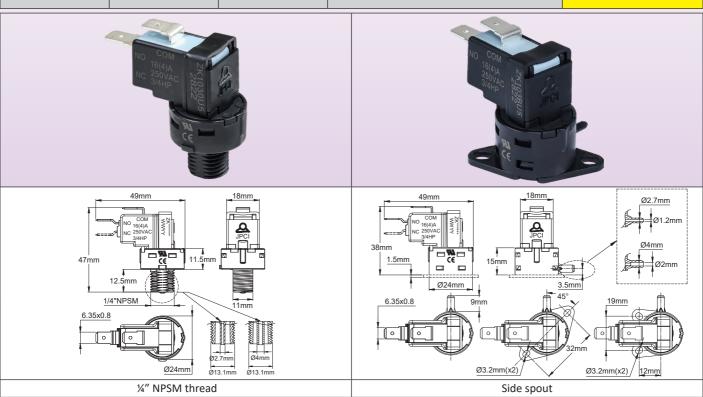

Main applications:

Direct actuating of pumps and blowers in whirlpool baths, hot tubs, jacuzzis and swimming pools, sink erasers, garbage disposers, medical equipment, plumbing or home appliances used with risks of water splashing. Resist to spas and swimming pools ozone concentration.

They feature in standard a patented barometric and thermometric compensation, anti-vibration locking, and are protected against tampering. Compared to the old ZP model, although in a smaller footprint, the design of the mechanical assembly and the diaphragm greatly increases the length of the usable connecting tube.

Technical features:

Fluid: Air only

descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Pressure port connection: Plastic spout

- For 1/8" (3mm) ID flexible plastic tubing
- For $\frac{1}{16}$ " (1.5 mm) ID flexible plastic tubing

Maximum PVC tube hardness 70 shore A

Membrane: Silicone, 22mm diameter.

Housing: PA66

Contact: Snap action, SPNO.

Electrical rating:

- Standard rating micro-switch: 16A 125/250VAC; ½HP 125VAC; ¾HP 250VAC
- On request: up to 22A, 2HP 250VAC

Action (2 styles of action are possible):

- <u>Momentary:</u> the contact switches when under pressure, and returns to its original position when there is no more pressure.
- <u>Latching</u>: a first pressure pulse switches the contact, which remains in this position, and only returns to its initial position with a second pressure pulse.

Electrical connection: 6.35 × 0.8mm quick connect terminals **Maximum operating pressure:** 120 kPa (1200 mbar, 17 PSI) **Ambient temperature limits:** Air: -10 ~ 85°C (14 to 185°F).

Contact us www.ultimheat.com Cat5-4-8-7



Barometric compensation: Calibrated flow leak orifice inside the pressure chamber

Mounting fittings: ½" NPSM with 2 flats at 11 mm distance on thread, for installation through a board, or without thread, with side spout, for mounting on a board surface with 2 screws with 19mm distance.


Switch operation: Operates on a sealed pressure air displacement, with patented calibrated micro-leak providing barometric and temperature compensation.

Caution: Use air transmitters with enough air volume to achieve minimum operating pressure.

Too long connection tubes and/or too small pressure transmitter will not operate the air switch or will operate it with a momentary action.

Accessories, in option or available as spare parts: ABS plastic nut (Maximum tightening torque 1.5 Nm) and tube securing nut (Maximum tightening torque 2 Nm).

How the locking nut tighten the PVC connecting tube:



In this series, the use of a connecting tube locking nut increases the force required to disconnect the tube by 350%.
(It can then reach 14 daN)



1/4"NPSM nut reference if ordered as a spare part:

Z6VE10003500003A



1/4" NPSM securing nut reference if ordered as a spare part:

Z6VE10003500006A

Maximum actuating distances with flexible PVC connecting tube. (With air button and air pedal of this catalogue)

Tests with reproducible automatic test equipment, 5.6 cm³ (3.4 cubic inches) pneumatic button chamber, 75 kPa (750 mbar, 10.9 PSI) pressure impulse for 3 seconds

| Switch operating force | Nominal tube I.D. | With air button | With foot pedal |
|------------------------|-------------------|---------------------|-----------------------|
| 100 gr. | 1.5 mm | 20 m (65 ft. 7 in.) | 39 m (127 ft. 11 in.) |
| 100 gr. | 3 mm | 7 m (23 ft.) | 19 m (62 ft. 4 in.) |
| 160 gr. | 1.5 mm | 13 m (42 ft. 8 in.) | 30 m (98 ft. 5 in.) |
| | 3 mm | 5 m (16 ft. 5 in.) | 12 m (39 ft. 4 in.) |

Part numbers with normally open contact, latching action*

| Pressure port fitting | Included accessories | Standard switch (16A 250VAC, 3/4HP 250VAC) | High rating switch (22A 250VAC, 2HP 250VAC) |
|---|--|---|--|
| | None | ZK1020U500000000 | ZK1720U600000000 |
| ¼" NPSM with spout for ½ "(3mm) | ¼" NPSM nut | ZK1020U500000006 | ZK1720U600000006 |
| internal diameter PVC tube** | 1/4" NPSM tube securing nut | ZK1020U500000007 | ZK1720U600000007 |
| | 1/4 NPSM nut + 1/4" NPSM tube securing nut | ZK1020U500000005 | ZK1720U600000005 |
| Spout on the side for 1/8" (6x3mm) tube on the side | None | ZK1022U500000000 | ZK1722U600000000 |
| Spout on the side for 1/6" (3x1.5mm) tube on the side | None | ZK152BU100000000 | ZK172BU600000000 |

Part numbers with normally open contact, momentary action*

| Pressure port fitting | Included accessories | Standard switch (16A 250VAC, 3/4HP 250VAC) | High rating switch (22A 250VAC, 2HP 250VAC) |
|---|---|---|--|
| | None | ZK2520U100000000 | ZK2720U600000000 |
| 1/4" NPSM with spout for 1/8" (3mm) | ¼" NPSM nut | ZK2520U100000006 | ZK2720U600000006 |
| internal diameter PVC tube** | 1/4" NPSM tube securing nut | ZK2520U100000007 | ZK2720U600000007 |
| | 1/4" NPSM nut + 1/4" NPSM tube securing nut | ZK2520U100000005 | ZK2720U600000005 |
| Spout on the side for 1/8" (6x3mm) tube on the side | None | ZK2522U100000000 | ZK2722U600000000 |
| Spout on the side for 1/4" (3x1.5mm) tube on the side | None | ZK252BU100000000 | ZK272BU600000000 |

In bold: the most common models.

Models with change-over (SPDT) contact: replace the 5th character "2" in the reference by "3".


Cat5-4-8-8 Contact us www.ultimheat.com

^{**} Models with spout for 1/6" (1.5mm) internal diameter tube instead of 1/8" (3mm ID): replace the characters "20" in the reference by "2A"



Snap action, double poles air switch, center 1/4" thread mounting, or surface mounting with

| Fitting | Standard rating | Maximum rating | Maximum remote actuating distance (Manual button, 3mm ID tube) | Туре |
|---------|--------------------------|--------------------------|--|------|
| PA66 | 2 × (16A ¾HP, 250VAC) | 2 × (22A 2HP, 250VAC) | 3 (2) m | ZT |

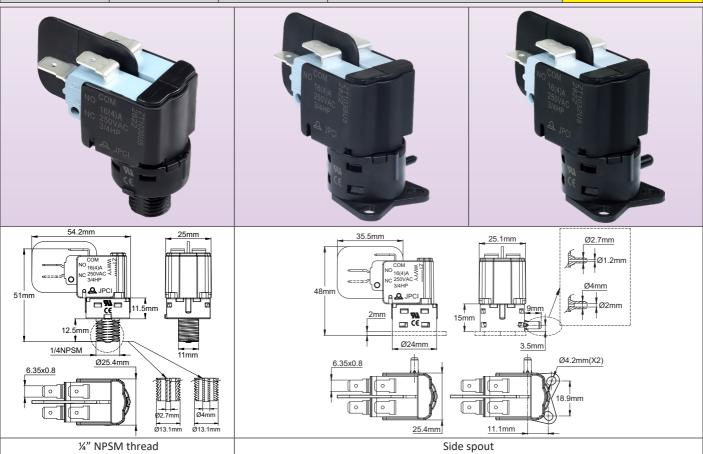

Main applications :

Direct actuating of pumps and blowers in whirlpool baths, hot tubs, jacuzzis and swimming pools, sink erasers, garbage disposers, medical equipment, plumbing or home appliances used with risks of water splashing. Resist to spas and swimming pools ozone concentration.

They feature in standard a patented barometric and thermometric compensation, anti-vibration locking, and are protected against tampering.

Technical features:

Fluid: Air only

Pressure port connection: Plastic spout
- For ⅓" (3 mm) ID flexible plastic tubing
- For ⅙" (1.5 mm) ID flexible plastic tubing
Maximum PVC tube hardness 70 shore A
Membrane: Silicone, 22mm diameter.

Housing: PA66

Contact: Snap action, SPNO.

Electrical rating:

- Standard rating micro-switch: 16A 125/250VAC; ½HP 125VAC; ¾HP 250VAC
- On request: up to 22A, 2HP 250VAC

Action (2 styles of action are possible):

- <u>Momentary</u>: the contact switches when under pressure, and returns to its original position when there is no more pressure.
- <u>Latching</u>: a first pressure pulse switches the contact, which remains in this position, and only returns to its initial position with a second pressure pulse.

drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice products,

Contact us www.ultimheat.com Cat5-4-8-9



Electrical connection: 6.35×0.8 mm quick connect terminals Maximum operating pressure: 120 kPa (1200 mbar, 17 PSI) Ambient temperature limits: Air: -10 $^{\sim}$ 85 $^{\circ}$ C (14 to 185 $^{\circ}$ F).

Barometric compensation: Calibrated flow leak orifice inside the pressure chamber

Mounting fittings: ½" NPSM with 2 flats at 11 mm distance on thread, for installation through a board, or without thread, with side spout, for mounting on a board surface with 2 screws with 19mm distance.


Switch operation: Operates on a sealed pressure air displacement, with patented calibrated micro-leak providing barometric and temperature compensation.

Caution: Use air transmitters with enough air volume to achieve minimum operating pressure.

Too long connection tubes and/or too small pressure transmitter will not operate the air switch or will operate it with a momentary action.

Accessories, in option or available as spare parts: ABS plastic nut (Maximum tightening torque 1.5 Nm) and tube securing nut (Maximum tightening torque 2 Nm).

How the locking nut tighten the PVC connecting tube:



In this series, the use of a connecting tube locking nut increases the force required to disconnect the tube by 350%. (It can then reach 14 daN)



1/4" NPSM nut reference if ordered as a spare part:

Z6VE10003500003A



1/4" NPSM securing nut reference if ordered as a spare part:

Z6VE10003500006A

Maximum actuating distances with flexible PVC connecting tube. (With air button and air pedal of this catalogue)

Tests with reproducible automatic test equipment, 5.6 cm³ (3.4 cubic inches) pneumatic button chamber, 75 kPa (750 mbar, 10.9 PSI) pressure impulse for 3 seconds

| Switch operating force | Nominal tube I.D. | With air button | With foot pedal |
|------------------------|-------------------|--------------------|----------------------|
| 100 cm | 1.5 mm | 7 m (23 ft.) | 15 m (49 ft. 3 in.) |
| 100 gr. | 3 mm | 3 m (9 ft. 10 in.) | 9 m (29 ft. 6 in.) |
| 160 ar | 1.5 mm | 4 m (13 ft. 1 in.) | 10 m (32 ft. 10 in.) |
| 160 gr. | 3 mm | 2 m (6 ft. 7 in.) | 5 m (16 ft. 5 in.) |

Part numbers with normally open contact, latching action*

| Pressure port fitting | Included accessories | Standard switch (16A 250VAC, 3/4HP 250VAC) | High rating switch (22A 250VAC, 2HP 250VAC) |
|--|--|---|--|
| | None | ZT1520U12L000000 | ZT1720U62L000000 |
| 1/4" NPSM with spout for 1/8 "(3mm) | ¼" NPSM nut | ZT1520U12L000006 | ZT1720U62L000006 |
| internal diameter PVC tube** | ¼" NPSM tube securing nut | ZT1520U12L000007 | ZT1720U62L000007 |
| | 1/4 NPSM nut + 1/4" NPSM tube securing nut | ZT1520U12L000005 | ZT1720U62L000005 |
| Spout on the side for 1/8" (6x3mm) tube on the side | None | ZT152BU12L000000 | ZT172BU62L000000 |
| Spout on the side for 1/16" (3x1.5mm) tube on the side | None | ZT1522U12L000000 | ZT1722U62L000000 |

Part numbers with normally open contact, momentary action*

| Pressure port fitting | Included accessories | Standard switch (16A 250VAC, 3/4HP 250VAC) | High rating switch (22A 250VAC, 2HP 250VAC) |
|--|---|--|--|
| | None | ZT2520U12L000000 | ZT2720U62L000000 |
| 1/2" NPSM with spout for 1/8" (3mm) | 1/4" NPSM nut | ZT2520U12L000006 | ZT2720U62L000006 |
| internal diameter PVC tube** | 1/4" NPSM tube securing nut | ZT2520U12L000007 | ZT2720U62L000007 |
| | 1/2" NPSM nut + 1/2" NPSM tube securing nut | ZT2520U12L000005 | ZT2720U62L000005 |
| Spout on the side for 1/8" (6x3mm) tube on the side | None | ZT252BU12L000000 | ZT272BU62L000000 |
| Spout on the side for 1/16" (3x1.5mm) tube on the side | None | ZT2522U12L000000 | ZT2722U62L000000 |

In bold: the most common models.

Models with change-over (SPDT) contact: replace the 5th character "2" in the reference by "3".

Cat5-4-8-10 Contact us www.ultimheat.com

^{**} Models with spout for 1/6"(1.5mm) internal diameter tube instead of 1/8" (3mm ID): replace the characters "20" in the reference by "2A"



Contact us www.ultimheat.com Cat5-4-9-1



data sheets are for guidance only and can be modified without prior advice

Air buttons and air pedals

Air buttons (Hand air transmitters), for hot tubs, spas and swimming pools

| Air volume | Button and bezels | Mounting | Ambient temperature | Туре |
|------------|-------------------|------------------|-----------------------------|-------|
| 11cm³ | ABS | Through tub wall | -10 ~ 85°C (-14 ~ 185°F) | 66ZM5 |



Main applications:

Use: Remote operation of air switches. This pneumatic switching technology safely isolates the user from the electrical current. The air transmitters provide the pulse air pressure needed to operate a remote air switch

Typical applications: Spas, swimming pools, electrical equipment remote operating of electrical devices on/off including motors, lights, pumps, air blowers, or other associated equipment.

Technical features:

Operating distance: With appropriate tubing, these hand actuation transmitters can operate air switches from distances of up to 30 meters (100 feet.)

Air volume: 11cm³

Button and bezels: ABS, Ozone and UV resistant, low profile dome design, interchangeable.

Standard Color: Black, white and nickel plated. Any other color and finish can be made with MOQ (consult factory).

Mounting: Through tub wall, with 11/4"-12 UNF nut and flat NBR gasket.

Mounting hole: Drill a dia. 32+1/-0mm (11/4") hole. The 11/4" nut is staggered to allow using this button for replacement

into preexisting dia. 37.3±1mm holes.

Wall thickness: From 2mm to 45mm ($\frac{1}{6}$ " to $\frac{1}{8}$ "). Cylinder material: ABS; ozone and UV resistant.

Gasket: NBR. Nut: ABS.

Bellow: EPDM, impervious to ozone and chemically treated swimming pool and spa water. No micro leak to avoid

pumping action with air switches. Stainless steel spring.

Tube connection: Spout for 3mm or 1.7mm (1/8" or 1/16" I.D.) flexible PVC or rubber tubing. We recommend tube securing nut to avoid accidental tubing disconnection.

Mechanical life: >100,000 cycles.

Ambient temperature: -10 to 85°C (14 to 185°F)

Spare parts: Cylinder assembly, button and bezel kit are available separately.

Options: Custom buttons with logo.

References:


| Model | Black (RAL9005) | Nicked plated | White (RAL9003) |
|---------------------------|------------------|------------------|------------------|
| With tube securing nut | 66ZM500060510000 | 66ZM500060710000 | 66ZM500060410000 |
| Without tube securing nut | 66ZM500060500000 | 66ZM500060700000 | 66ZM500060400000 |

Cat5-4-9-3 Contact us www.ultimheat.com

2

Foot air pedal (air transmitters)

| Operating distance | Air volume | Bellow material | Ambient temperature | Туре |
|-----------------------|-------------------|-----------------|-----------------------------|--------|
| 30 meters (100 feet.) | 55cm ³ | Rubber | -10 ~ 60°C (-14 ~ 140°F) | 66ZMD7 |

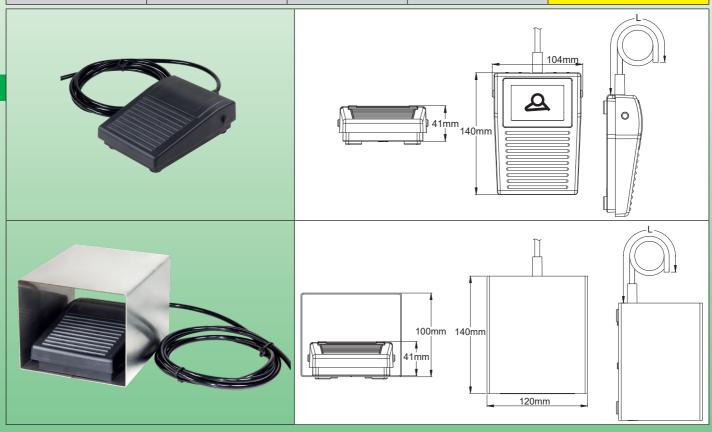

Main applications:

Use: Remote hand free operation of air switches. Even in wet or hazardous environments, this pneumatic foot air pedal safely isolates the user operating power tools and other electrical devices from the electrical current. The foot air pedal provide the pulse air pressure needed to operate a remote air switch

Two switching logics are possible, depending of the air switch used:

- Momentary Switching: Press and hold for on, release for off
- Alternate Action Switching: Press for on, press again for off

Technical features:

Typical applications: Electrical equipment remote operating of electrical devices on/off including motors, lights, pumps, air blowers, or other associated equipment.

Operating distance: With appropriate tubing, these foot air pedals can operate air switches from distances of up to 30 meters (100 feet.)

Air volume: 55cm³

Accidental actuation prevention: By steel strong shroud, 1.2mm thickness. Anti-skid protection is provided by 4 rubber feet.

Standard Color: Foot shroud: orange epoxy painting. Any other color can be made with MOQ (consult factory). Stainless steel foot shroud on request.

Bellow material: Strong, rubber. No micro leak to avoid pumping action with air switches.

Tube connection: Spout for 3×6 mm flexible PVC or rubber tubing ($\frac{1}{8}$ " I.D), with tube securing nut to avoid accidental tubing disconnection.

Mechanical life: >100,000 cycles

Ambient temperature: -10 to 85°C (14 to 185°F)

References:

| Foot pedal with steel shroud: | 66ZMD70383S10000 | |
|----------------------------------|------------------|--|
| Foot pedal without steel shroud: | 66ZMD70383S00000 | |


Cat5-4-9-4 Contact us www.ultimheat.com

Pneumatic remote switch kit

| Actuating device | Electric wiring | Contact | Maximum remote operation distance | Туре |
|--------------------------|------------------------|--------------------------------|-----------------------------------|-------|
| Air button or foot pedal | Screw connection block | Snap action, 16 (4)A 250VAC | 6m or 10m | 66ZSE |


Air button actuating device






Foot pedal operating device without mechanical protection





Foot pedal operating device with mechanical protection







Main applications:

Pneumatic kits for remote switching of machine tools, kitchen sink crushers, swimjet pumps, underwater lighting, plumbing machines, medical equipment. (Use in aquatic environments or when there is a risk of the presence of water drops). Rating 16 (4)A 250VAC. Latching action. Eliminates electrical risks because the user is connected to the equipment only by a pneumatic tube.

Technical features:

Connection box: PA66, waterproof rating IP44, connection by two M16 cable glands.

Electrical connection: Internal, on a 6×2.5 mm² screw terminal block, allowing a power cable and an output cable to be connected.

Maximum length of connecting tube: 6m for manual control, 10m for foot control

Control unit: Chrome-plated push button, for mounting in a 32mm diameter hole, or foot pedal under stainless steel cover.

Electrical rating: 16 (4)A 125/250VAC; ½HP 125VAC; ¾HP 250VAC.

Ambient temperature: -10 to 85°C (14 to 185°F) Fixing: On wall with 2 screws with 70mm distance

Operation: Sending a pressure impulse by the control unit remotely activates a bistable switch: a first impulse closes

the contact, a second impulse opens it

Options: Power cord with Euro, UL or other national plug, and output cable (Specify models and length)

Examples of boxes with cord and connection cable:



References:

| Operating device | PVC pneumatic tube length | 1 switch, momentary action (16A 250VAC, 3/4HP 250VAC) | 1 switches, bistable action (16A 250VAC, 3/4HP 250VAC) |
|------------------|---------------------------|--|---|
| Hand button | 2m | 66ZSEHB1ZM46B000 | 66ZSEHB1ZB46B000 |
| | 4m | 66ZSEHB1ZM46D000 | 66ZSEHB1ZB46D000 |
| | 6m | 66ZSEHB1ZM46F000 | 66ZSEHB1ZB46F000 |
| | 10m | 66ZSEHB1ZM46J000 | 66ZSEHB1ZB46J000 |
| Foot pedal | 2m | 66ZSEA01ZM46B000 | 66ZSEA01ZB46B000 |
| | 4m | 66ZSEA01ZM46D000 | 66ZSEA01ZB46D000 |
| | 6m | 66ZSEA01ZM46F000 | 66ZSEA01ZB46F000 |
| | 10m | 66ZSEA01ZM46J000 | 66ZSEA01ZB46J000 |

Note:

- 1. For hand button, standard color in black, replace the 6th and 7th character "HB" in the reference by "HW" for white color; and replace by "HN" for nickel color.
- 2. For foot pedal, standard one without stainless steel cover, replace the 6th and 7th character "A0" in the reference by "AS" for the one with stainless steel cover.
- 3. For 2 switches models, replace the 8th character "1" in the reference by "2". Attention this is not available for distances longer than 4m



Accessories

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

Contact us www.ultimheat.com Cat5-4-10-1


)


Nuts specific to pneumatic controls

| Compatible threads | Material | |
|--------------------------------|----------|------|
| ¼" NPT ¼" NPSM UNC %₅-18 | ABS | Z6VE |

Tube securing nuts for soft 6×3 mm ($\frac{1}{2}$ ") PVC tubes used in air switches and air buttons







UNC %6-18

Main Features:

These nuts prevent the tube from being disconnected as a result of stress occurred during installation. They are particularly useful when these connections are located in hard-to-reach places, such as control boxes for spas and swimming pools. Nothing is more unpleasant to have a pneumatic control which no longer works because the tube has disconnected because it was too short during assembly.

These nuts have 4 teeth which, by tightening on the tube, prevent its inadvertent sliding.

Tightened with a torque of 3 to 4 N.m they make the connection resistant to a pulling force greater than 6 DaN. They are compatible with most pneumatic switches and pneumatic control buttons on the market.

Material: Black ABS

Options: Realization in different colors for customer customization.

Cut view after assembly on air switch (Modified colors):



Part numbers:

| For ¼" NPT or ¼" NPSM threads: | Z6VE10003500006A |
|--------------------------------|------------------|
| For UNC %-18 threads: | Z6VE10003500008A |

Contact us www.ultimheat.com Cat5-4-10-3

0

Main Features:

These nuts are used to mount pneumatic remote controls with a $\frac{1}{4}$ " NPT, $\frac{1}{4}$ " NPSM or UNC $\frac{1}{6}$ -18 thread through the wall.

Recommended tightening torque: 2N.m. They are compatible with most pneumatic switches and pneumatic control buttons on the market.

Material: Black ABS

Options: Realization in different colors for customer customization.

View after mounting through a board:



Part numbers:

| For ¼" NPT or ¼" NPSM threads: | Z6VE10003500003A | |
|--------------------------------|------------------|--|
| For UNC %-18 threads: | Z6VE10003500007A | |

Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice

without prior advice descriptions, features used on these data sheets are for guidance only and can be modified

drawings,


Because of permanent improvement of our products,

Connection accessories of pressure switches on pipes

76TU 66RRA


These accessories allow or facilitate the connection between air switches or pressure switches and the equipment on which they are mounted.

Connection of soft PVC tube:

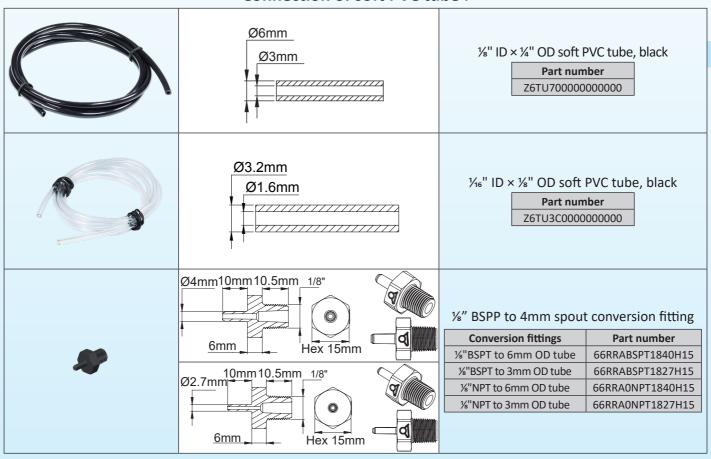


Connection of pressure switches with pressure taps on metal pipes by butt welding tees.

Produced with the flow-drill forming technique, these taps can be made in all diameters of thin-walled stainless steel tubes, they ensure a sufficient thread length without requiring the welding of a fitting. ½" NPT, ½" BSPP and ¼" NPT, ¼" BSPP threads are possible.

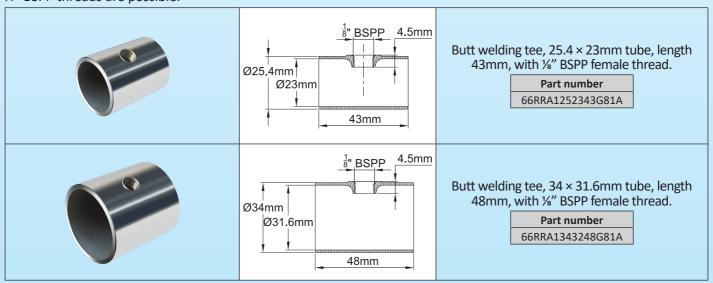

Contact us www.ultimheat.com Cat5-4-10-5






Butt welding tee, 42.4×40 mm tube, length 50mm, with $\frac{1}{8}$ " BSPP female thread.

Part number 66RRA1424050G81A

Connection of pressure switches with pressure taps on metal pipes by threaded couplings. Produced with the flow-drill forming technique, these taps can be made in all diameters of thin-walled stainless steel

Produced with the flow-drill forming technique, these taps can be made in all diameters of thin-walled stainless steel tubes, they ensure a sufficient thread length without requiring the welding of a fitting. %" NPT, %" BSPP and ¼" NPT, %" BSPP threads are possible.

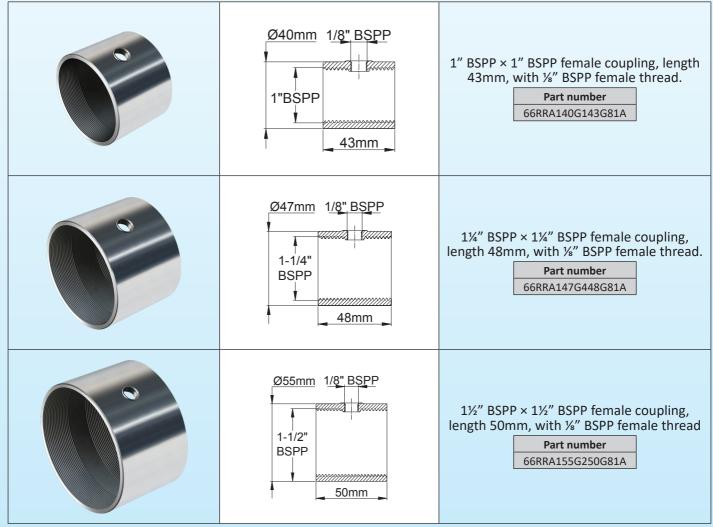







Catalogues collection on

www.ultimheat.com

Electromechanical components & OEM heating sub-assemblies manufacturer

- · Mechanical thermostats
- Mechanical safeties single & three poles
- · ATEX thermostats & safeties
- Flow through liquid heaters
- Immersion heaters
- · Heating elements for air and liquid
- Connection blocks

- Housings for corrosive environments
- Flow switches
- Level switches
- · Pressure switches and air switches
- Fusible links and fire detection mechanisms
- Tracing equipment
- Taylor made solutions

/ITCHES & AIR SWITCHES